

Matrox Morphis

Installation and Hardware Reference

Manual no. 10867-101-0200

August 26, 2005

Matrox® is a registered trademark of Matrox Electronic Systems Ltd.

Windows® are registered trademarks of Microsoft Corporation.

Intel® is a registered trademark of Intel Corporation.

Pentium® is a registered trademark of Intel Corporation.

All other nationally and internationally recognized trademarks and tradenames are hereby acknowledged.

© Copyright Matrox Electronic Systems Ltd., 2005 All rights reserved.

Limitation of Liabilities: In no event will Matrox or its suppliers be liable for any indirect, special, incidental, economic, cover or consequential damages arising out of the use of or inability to use the product, user documentation or related technical support, including without limitation, damages or costs relating to the loss of profits, business, goodwill, even if advised of the possibility of such damages. In no event will Matrox and its suppliers' liability exceed the amount paid by you, for the product.

Because some jurisdictions do not allow the exclusion or limitation of liability for consequential or incidental damages, the above limitation, may not apply to you.

Disclaimer: Matrox Electronic Systems Ltd. reserves the right to make changes in specifications at any time and without notice. The information provided by this document is believed to be accurate and reliable. However, neither Matrox Electronic Systems Ltd. nor its suppliers assume any responsibility for its use; or for any infringements of patents or other rights of third parties resulting from its use. No license is granted under any patents or patent right of Matrox Electronic Systems Ltd.

PRINTED IN CANADA

Contents

Chapter 1: Introduction 7

Matrox Morphis	8
Board overview	8
Acquisition with Matrox Morphis Quad.	11
General acquisition features	12
Compression/decompression.	14
Additional functionality	14
Data transfer.	15
Documentation conventions.	15
Software	15
Essentials to get started	17
Inspecting the Matrox Morphis package	18
Standard package	18
Optional items	18
Handling components	20
Installation overview	21

Chapter 2: Hardware installation. 23

Installing Matrox Morphis	24
Installing Matrox Morphis for PCI/PCI-X	24
Installing Matrox Morphis for PC/104-Plus	26
Installing the cables for Watchdog functionality	30
Installing the Matrox Morphis Video Input module	31
Installing the Matrox Morphis Video and I/O module	33

Connecting video sources to Matrox Morphis	37
Connecting video to the Matrox Morphis Dual Standard, Quad, or Video Input module.	37
Connecting video to the Matrox Morphis Dual HDC and PC/104-Plus	39
Connecting to the Video and I/O module	41

Chapter 3: Using multiple Matrox Morphis boards. 43

Multiple board installation	44
Simultaneous image capture from different boards	46

Chapter 4: Hardware reference 47

Matrox Morphis hardware reference	48
Acquisition section	48
Video Selector	51
Video decoders.	52
Video capture controller and formatter.	53
I/O controller	57
User-defined signals	57
RS-485 serial interface	58
Watchdog circuitry.	60
Compression/decompression accelerator	62
JPEG2000 controller	62
JPEG2000 CODEC.	63
PCI interface	63
Image authentication	64
Implementation	64

Appendix A: Glossary. 67

Glossary	68
--------------------	----

Appendix B: Technical information 71

Technical information	72
Global information	72
Acquisition features	72
Compression/decompression features	73
Additional features	74
Data transfer features	74
Electrical specifications	75
Dimensions and environmental specifications	80
Base board input and output connectors	81
Matrox Morphis Dual Standard and Quad boards	81
Matrox Morphis Dual HDC board	90
Matrox Morphis Dual PC/104-Plus board	98
Connectors of the expansion modules	104
Matrox Morphis Video Input module	104
Matrox Morphis Video and I/O module	106

Appendix C: Listing of Matrox Morphis boards 111

Major revisions of Matrox Morphis	112
---	-----

Appendix D: Acknowledgments 113

UART copyright information	114
--------------------------------------	-----

Index

Regulatory compliance for Matrox Morphis Dual PC/104-Plus

***Regulatory compliance for Matrox Morphis Dual Standard,
Dual HDC, and Quad***

Product support

Chapter

1

Introduction

This chapter outlines the key features of the Matrox Morphis board.

Matrox Morphis

Board overview

The Matrox Morphis family consists of two cost-effective imaging boards capable of acquiring standard, monochrome/color, analog video: Matrox Morphis Dual and Matrox Morphis Quad. Matrox Morphis Dual can be purchased as either a frame grabber, a JPEG2000 accelerator, or both. The JPEG2000 accelerator is capable of performing JPEG2000 compression/decompression.

Matrox Morphis Dual

Matrox Morphis Dual is an imaging board that can simultaneously capture from any two connected, supported, asynchronous video sources, using its two independent acquisition paths. In addition, it can switch the capture between video sources of the same type with minimum latency (fast switching). If not simultaneously capturing from two video sources, Matrox Morphis Dual can perform ultra-fast switching.

Matrox Morphis Dual comes in three factory-configured versions: Matrox Morphis Dual Standard, Matrox Morphis Dual High Density Connector (HDC), and Matrox Morphis Dual PC/104-Plus.


Matrox Morphis HDC provides the same features as Matrox Morphis Dual Standard, except the HDC version has a high density 44-pin video input connector on its bracket to directly support connection with up to 16 CVBS/monochrome or 8 Y/C video sources, or a combination of both.

Matrox Morphis Dual PC/104-Plus provides similar functionality to Matrox Morphis Dual Standard, except it is designed to be used in a PC/104-Plus slot such as in Matrox 4-Sight-M. Furthermore, it does not include an I/O controller.


All three versions of Matrox Morphis Dual can be purchased with an acquisition section, a JPEG2000 accelerator, or both.

Matrox Morphis Dual Standard and Matrox Morphis Dual PC/104-Plus can also be purchased with image authentication capabilities when purchased with both the acquisition section and the JPEG2000 accelerator.


The following diagram illustrates the data flow of the Matrox Morphis Dual Standard board.

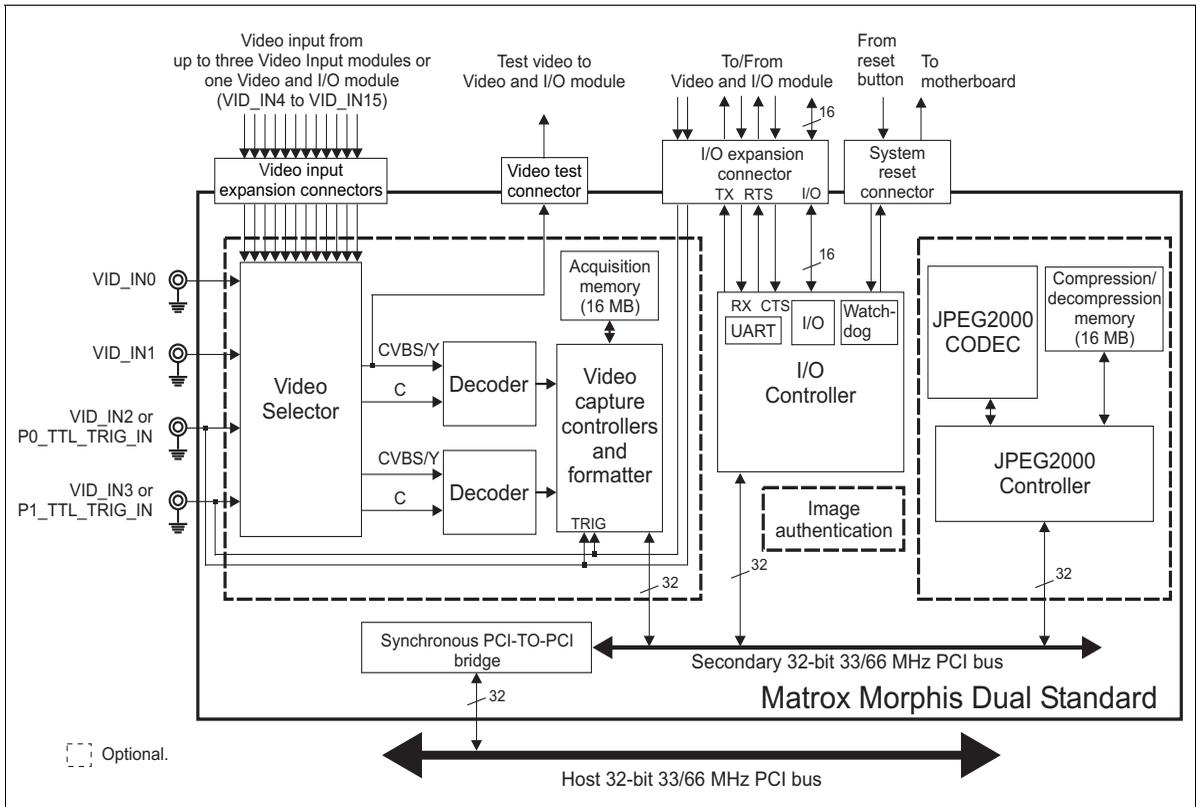

The following diagram illustrates the data flow of the Matrox Morphis Dual HDC board.

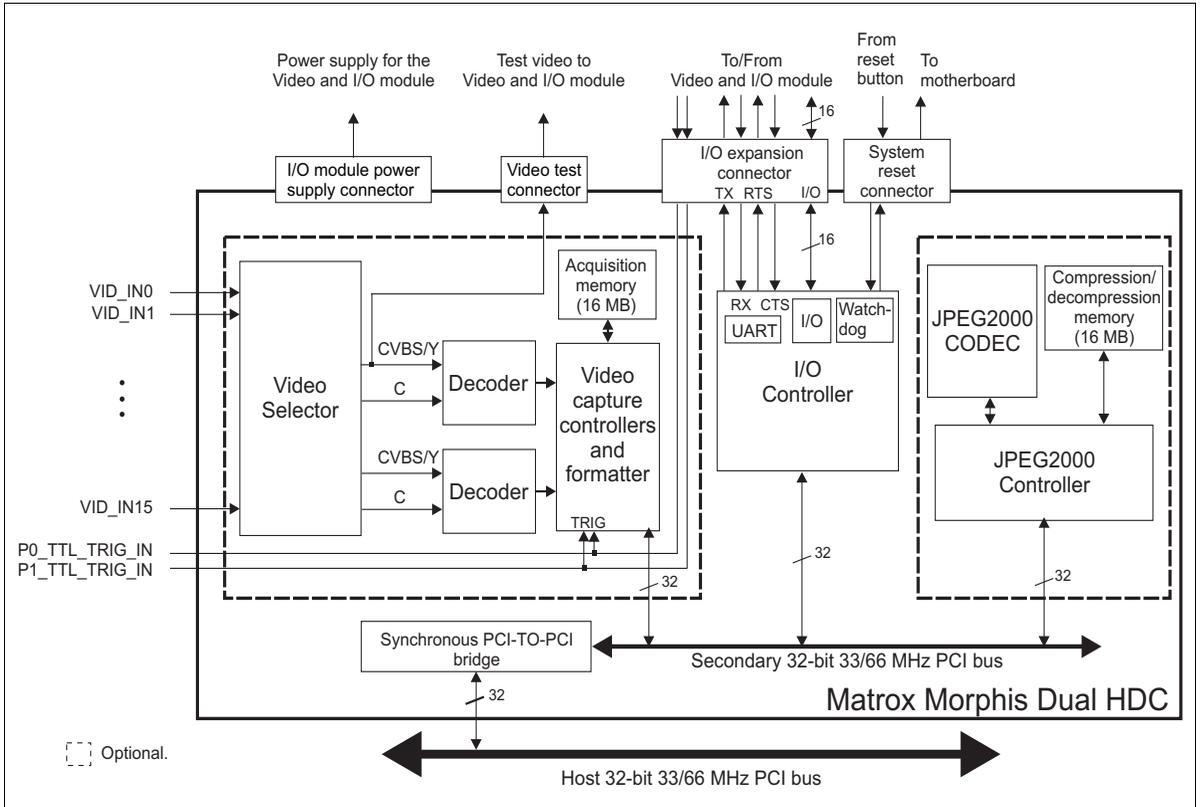


The following diagram illustrates the data flow of the Matrox Morphis PC/104-Plus board.

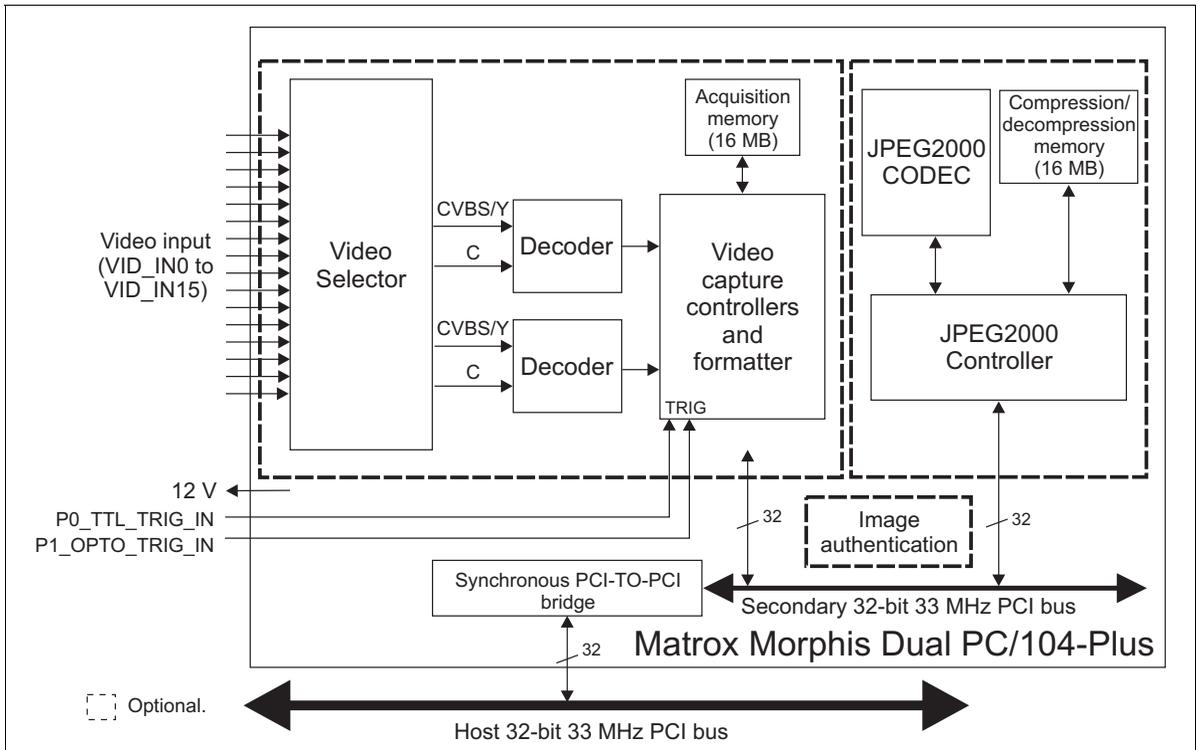

Acquisition with Matrox Morphis Quad

Matrox Morphis Quad is a frame grabber that can simultaneously capture from any four connected, supported, asynchronous video sources, using its four independent acquisition paths. In addition, it can switch the capture between video sources of the same type with minimum latency (fast switching). If not simultaneously capturing from four video sources, Matrox Morphis Quad can perform ultra-fast switching. Matrox Morphis Quad does not support the optional JPEG2000 accelerator.

The following diagram illustrates the data flow of the Matrox Morphis Quad board.

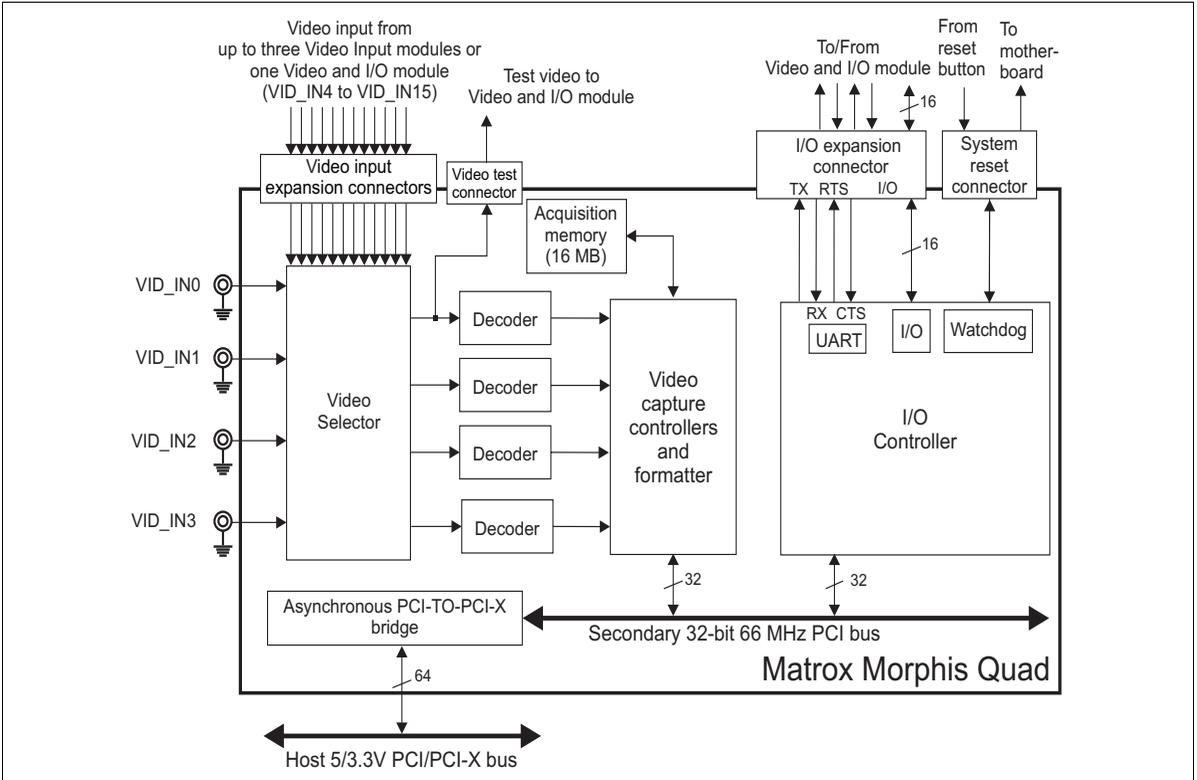


General acquisition features

The Matrox Morphis video decoders can accept composite (CVBS) and component S-video (Y/C) in NTSC/PAL formats, and monochrome video in RS-170/CCIR. Grabbed data can be converted into the following formats with square pixels: RGB planar, BGR32 packed, YUV16 packed (stored in YUYV format), and 8-bit monochrome.

As a standard feature on the Matrox Morphis Dual Standard and Quad, you can connect up to 4 CVBS/monochrome or 2 Y/C video sources, or a combination of both. You can extend the number of video sources that can be connected using optional expansion modules. You can use up to three Matrox Morphis Video Input modules, and to each module, connect the same number of video sources as is

supported by the base board. Alternatively, you can use a single expansion module, the Matrox Morphis Video and I/O module, and connect an additional 12 CVBS/monochrome or 6 Y/C video sources, or a combination of both.

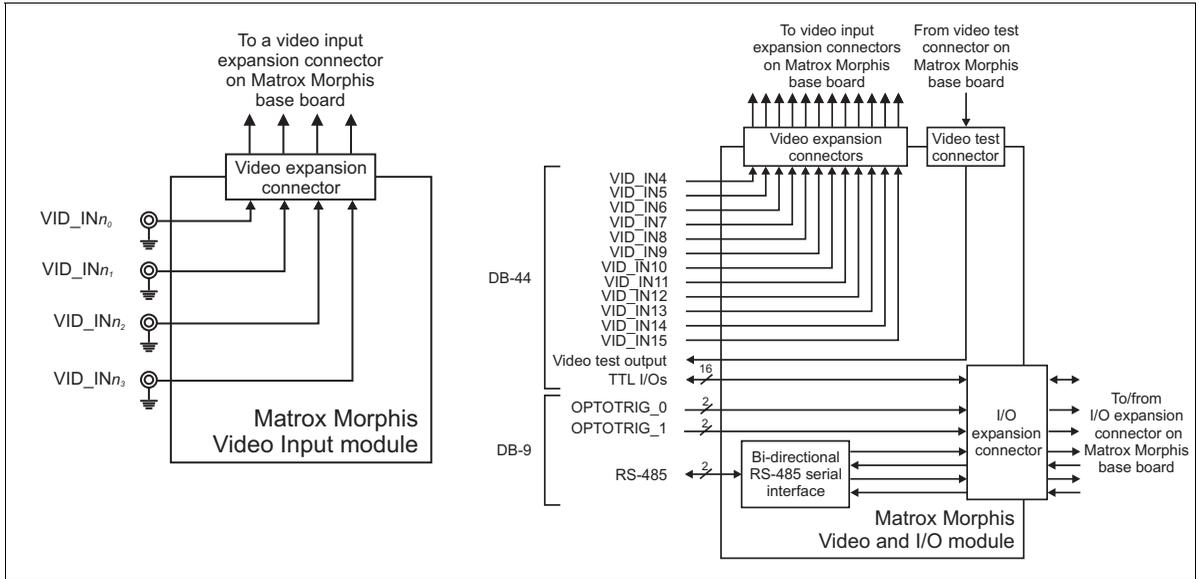

- ❖ Note that you can only connect a single Matrox Morphis Video and I/O module to the base board, and that the Matrox Morphis Video and I/O module and the Matrox Morphis Video Input module are mutually exclusive.
- ❖ The HDC and the PC/104-Plus versions of the Matrox Dual board support direct connection with 16 CVBS/monochrome or 8 Y/C video sources, or a combination of both.

Formatting features of Matrox Morphis include cropping (ROI capture), arbitrary downscaling to 1/16th of a field or frame, and vertical/horizontal flipping.

With the exception of Matrox Morphis Quad, Matrox Morphis boards accept two external trigger inputs, and can operate in next valid frame/field mode when grabbing upon a trigger. From the BNC connectors of the base board, the triggers are received directly in TTL format; whereas from the Matrox Morphis Video and I/O module, the triggers are opto-isolated.

Matrox Morphis has 16 Mbytes of on-board acquisition memory.

Compression/decompression

With the exception of Matrox Morphis Quad, Matrox Morphis boards support an optional JPEG2000 image compression/decompression accelerator. With the accelerator, Matrox Morphis supports real-time performance for typical video rates and lossy (9/7 wavelet) and lossless (5/3 wavelet) modes. In addition, Matrox Morphis supports up to 12 bits per component.

When the JPEG2000 accelerator is installed, Matrox Morphis has 16 Mbytes of on-board compression/decompression memory.

Note that Matrox Morphis can be purchased solely as a JPEG2000 image compression/decompression accelerator.

Additional functionality

To simplify overall system integration, Matrox Morphis also offers a variety of additional features. These features include:

Feature	Dual Standard	Dual HDC	Dual PC/04-Plus	Quad
Hardware facilities for implementing custom software-based motion detection.	●	●	●	●
Integrated Watchdog capability for automatically recovering from application or system failure.	●	●		●
16 TTL user I/O integrated signals to control or synchronize with other devices' user inputs. These signals can be internally accessed, or accessed externally using the Matrox Morphis Video and I/O module.	●	●		●
An RS-485 serial interface, mapped as a COM port so that the interface can be accessed through the Win32 API. The serial interface can both receive and transmit signals, but in half-duplex mode. The serial interface can be connected to an RS-485 two-wire multi-drop network.	●	●		●
Video input testing. The CVBS or Y input of decoder 0 can be routed out to the Matrox Morphis Video and I/O module for test purposes.	●	●		●
Support for image authentication. Image authentication allows you to know whether or not someone has tampered with an image.	●		●	

Data transfer

Matrox Morphis boards allow the transfer of live video to Host memory, off-board display memory, or other PCI, PCI-X, or PC/104-Plus devices. Matrox Morphis Dual Standard and HDC transfer the video over a PCI bus, Matrox Morphis Dual PC/104-Plus transfers the video over a PC/104-Plus bus, and Matrox Morphis Quad transfers the video over a PCI-X bus. All Matrox Morphis boards also feature an on-board 32-bit 33/66 MHz PCI bus master to reduce CPU usage. The boards can also generate interrupts for the start and end of a field, frame, and sequence capture.

Important

Note that transfer of image data to a display board or other PCI, PCI-X, or PC/104-Plus device might require intervention from the Host CPU, depending on your computer's architecture¹.

Documentation conventions

This manual refers to all Matrox Morphis boards as Matrox Morphis. When necessary, it distinguishes between them using their full name. Also note that, when the term Host is used in this manual, it refers to the host computer.

- ❖ Note that unless otherwise stated, the information in this manual reflects the most recent versions of the boards available at the time that this manual was written. *Appendix C: Listing of Matrox Morphis boards* lists the major changes that have been made to the boards since they were first introduced.

Software

To operate Matrox Morphis, you can purchase one or more Matrox Imaging software products that support the Matrox Morphis board. These are the Matrox Imaging Library (MIL) and its derivatives (MIL-Lite, ActiveMIL, ActiveMIL-Lite, and Matrox Inspector). All Matrox software is supported under Windows; consult your software manual for supported Windows environments.

-
1. Direct copies are possible if the display memory is physically accessible from the Matrox Morphis board (which is the case for most AGP display boards, and for PCI/PCI-X display boards if they are plugged into the same PCI/PCI-X bus segment as the Matrox Morphis board).

- ❖ Note that, although other software products might be available to operate Matrox Morphis, the discussion throughout this manual is based in terms of Matrox Imaging software products.

MIL MIL is a high-level programming library with an extensive set of optimized functions for image capture, processing, analysis, transfer, compression, display, and archiving. Image processing operations include point-to-point, statistical, spatial filtering, morphological, geometric transformation, and FFT operations. Analysis operations support calibration, are performed with sub-pixel accuracy, and include pattern recognition (normalized grayscale correlation and Geometric Model Finder), blob analysis, edge extraction and analysis, measurement, character recognition (template-based and feature-based), and code recognition (1D, 2D and composite code types).

MIL applications are easily ported to new hardware platforms and can be designed to take advantage of multi-processing and multi-threading environments.

MIL-Lite MIL-Lite is a subset of MIL. It includes all the MIL functions for image acquisition, transfer, display control, and archiving.

ActiveMIL ActiveMIL is a set of ActiveX controls that are based on MIL. ActiveMIL was designed for rapid application development (RAD) tools, such as Microsoft's Visual Basic. ActiveMIL is included with MIL (ActiveMIL-Lite is included with MIL-Lite).

Matrox Inspector Matrox Inspector is an interactive Windows application for image capture, processing, analysis, and archiving. MIL application developers can use Matrox Inspector as a prototyping tool to quickly build proof-of-concept demonstrations for their video surveillance, machine vision, image analysis, and medical imaging system. End users can use Matrox Inspector to perform and automate image enhancement and measurement tasks.

Matrox Intellicam Matrox Intellicam is an interactive Windows program that allows fast camera interfacing and provides interactive access to all the acquisition features of your Matrox board. With Matrox Intellicam, you can change the size and position of the active region by creating a custom digitizer configuration format (DCF) file. Matrox Intellicam is included with all Matrox Imaging software products.

Essentials to get started

To use Matrox Morphis, you must have a computer with at least the following:

- For Matrox Morphis Dual Standard, Dual HDC, and Quad, an available conventional 3.3 or 5 V, 33, 66, 100, or 133 MHz, 32 or 64-bit PCI/PCI-X slot (bus-master capable). For Matrox Morphis Dual PC/104-Plus, an available 33 MHz, 32-bit PC/104-Plus slot. You also need a free bracket location at the back of the computer chassis for each required Matrox Morphis expansion module (preferably, but not necessarily, a PCI/PCI-X slot to give the installed module increased mechanical stability). This location need not be adjacent to the Matrox Morphis base board.
- Processor with an Intel 32-bit architecture (IA32) or equivalent.
- A computer with a relatively up-to-date PCI/PCI-X chipset, such as the Intel E7500 series. An up-to-date chipset is recommended because it generally offers better performance in terms of data transfer rates. To learn more about the most appropriate chipset, refer to the Matrox Imaging website or consult with your local Matrox Imaging representative, local Matrox Imaging sales office, or the Matrox Imaging Customer Support Group at headquarters.
- Microsoft Windows (consult the software package for specific supported environments and computer memory/storage requirements).
- ❖ Matrox Morphis is not supported under Windows NT nor Me.
- A CD drive, and a hard disk or network drive on which to install the Matrox Morphis software.

Other useful considerations

Inspecting the Matrox Morphis package

When you unpack your Matrox Morphis package, you should check its contents. Note that optional parts might or might not be included, depending on what you ordered. If something is missing or damaged, contact your Matrox representative.

Standard package

If you ordered Matrox Morphis, you should receive the following items:

- The Matrox Morphis base board.
- The *Matrox Morphis Installation and Hardware Reference* manual (this document).
- An HD-44 video input module and a flat ribbon cable (that has a standard 40-pin female connector at both ends), included with Matrox Morphis Dual PC/104-Plus.

Optional items

You might have also ordered one or more of the following:

- MIL-32/CD, which includes ActiveMIL; MIL-LITE/CD, which includes ActiveMIL-Lite; or Matrox INSPECTOR-32/CD. Matrox Intellicam is included with each of the aforementioned software packages.
- A Matrox Morphis Video Input module, and a flat ribbon cable (that has a standard 10-pin female connector at both ends) to connect the module to the base board.



- A Matrox Morphis Video and I/O module, and four flat ribbon cables to connect the module to the base board. Three of the flat ribbon cables have a standard 10-pin female connector at both ends (same as the previously illustrated cable), and one has a standard 30-pin female connector at both ends.



- A DBHD44-TO-13BNC input cable, a 7-foot cable with a high density 44-pin male connector and thirteen BNC male type connectors. Six BNC-TO-SVHS adapter cables for Y/C input are shipped with the DBHD44-TO-13BNC cable.
- A DH44-TO-13BNC/O input cable, a 6-foot cable with a high density 44-pin male connector at one end and both open-ended wires and thirteen BNC male type connectors at the other end. This cable is required if you want to connect to synchronization and control signals. Six BNC-TO-SVHS adapter cables for Y/C input are also shipped with the DH44-TO-13BNC/O cable.



- A BNC-TO-SVHS adapter cable, an 8-inch cable with two BNC female type connectors at one end, and a Y/C connector at the other end. This cable can be attached to two standard BNC to BNC cables for Y/C input.

- An HD-44M-18BNC input cable, a 3-foot cable with a 44-pin male connector at one end and eighteen BNC female type connectors at the other end. This cable is used with Matrox Morphis Dual HDC.



- An HD-44M-18BNC+ input cable, a 3-foot cable with a 44-pin male connector at one end and eighteen BNC female type connectors at the other end. This cable is used with Matrox Morphis Dual PC/104-Plus

Important

Note that the HD-44M-18BNC and the HD-44M-18BNC+ cables are not interchangeable. Although both cables have similar terminations, the pins are wired differently between the two. It is therefore important to always use the correct cable with your Matrox Morphis board.

Handling components

The electronic circuits in your computer and the circuits on Matrox Morphis are sensitive to static electricity and surges. Improper handling can seriously damage the circuits. Be sure to follow these precautions:

- Drain static electricity from your body by touching a metal fixture (or ground) before you touch any electronic component.
- Avoid letting your clothing come in contact with the circuit boards or components.

Caution

Before you add or remove devices from your computer, always **turn off** the power to your computer and all peripherals.

Installation overview

The installation procedure consists of the following steps:

1. Complete the hardware installation as described in Chapter 2.
2. Complete the software installation procedure as described in the documentation accompanying your software package.

More information

For information on using multiple Matrox Morphis boards, refer to Chapter 3, and for in-depth hardware information, refer to chapter 4.

If you want technical information about Matrox Morphis, including specifications and connector pinouts and descriptions, refer to *Appendix B: Technical information*.

Conventions

When the term *Host* is used in this manual, it refers to your computer.

This manual occasionally makes reference to a MIL-Lite function. However, anything that can be accomplished with MIL-Lite can also be accomplished with MIL, ActiveMIL, ActiveMIL-Lite, or Matrox Inspector.¹

Need help?

If you experience problems during installation or while using this product, refer to the support page on the Matrox Imaging web site: www.matrox.com/imaging/support. This page provides answers to frequently asked questions, as well as offers registered customers additional ways of obtaining support.

If your question is not addressed and you are registered, you can contact technical support. To do so, you should first complete and submit the online Technical Support Request Form, accessible from the above-mentioned page. Once the information is submitted, a Matrox support agent will contact you shortly thereafter by email or phone, depending on the problem.

In the unlikely event of a failure, you will find the warranty and a *Product Assistance Request Form*, that outlines return conditions and procedures, at the back of this manual.

1. Most operations can be accomplished with Matrox Inspector.

Chapter

2

Hardware installation

This chapter explains how to install the Matrox Morphis hardware.


Installing Matrox Morphis

Before you install your Matrox Morphis board(s), some precautionary measures must be taken. Turn off the power to your computer and its peripherals, and drain static electricity from your body (by touching a metal part of the computer chassis). Next, follow the steps to install your board(s) according to its form factor: PCI/PCI-X or PC/104-Plus.

Installing Matrox Morphis for PCI/PCI-X

Use the following steps to install your Matrox Morphis board(s) for PCI/PCI-X. Note that your board(s) should be installed before you install your software.


1. Remove the cover from your computer using the instructions from your computer manual.
2. Check that you have an empty PCI slot (or, for improved performance, a PCI-X slot for Matrox Morphis Quad) that can accommodate the Matrox Morphis base board. Illustrated below are some of the more common PCI/PCI-X slots:

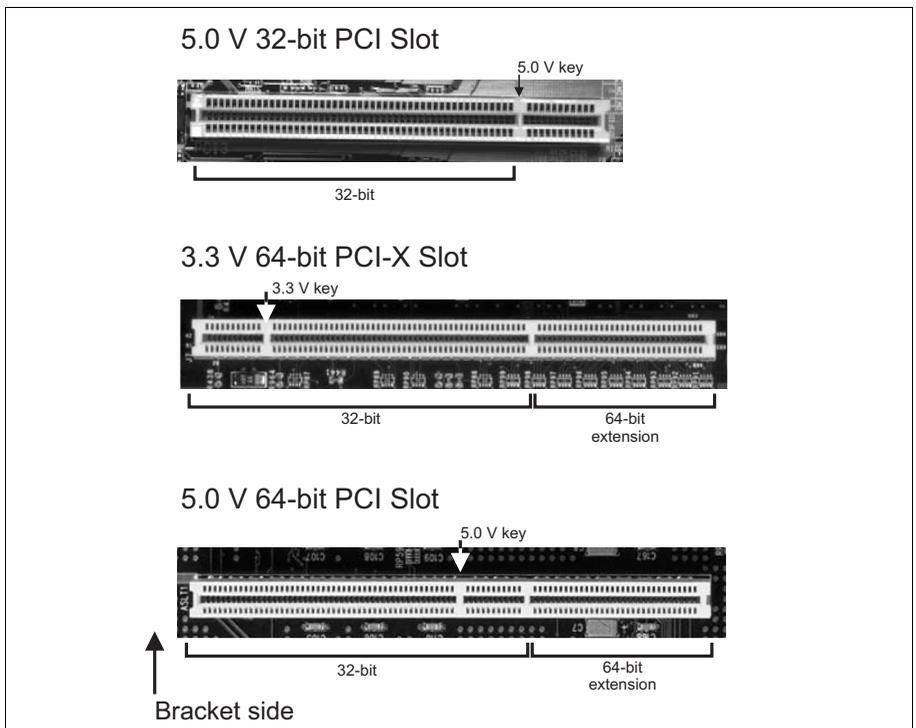

If you are also installing Matrox Morphis expansion modules, an additional slot must be available for each expansion module that you intend to install. This slot need not be adjacent to the base board. In addition, the slot can be of any type because the expansion modules' support tab(s) can be removed; if a PCI/PCI-X slot is selected, the tab(s) will fit into the slot's connector, ensuring that the module does not move.

If necessary, remove boards from your computer to make room for your Matrox Morphis board(s).

3. If present, remove the blank metal plate located at the back of the selected slots. Keep the removed bolts; you will need them to fasten the Matrox Morphis boards.
4. If Watchdog functionality is required, install the appropriate cables as described in *Installing the cables for Watchdog functionality* section, later in this chapter.
5. Carefully position the Matrox Morphis base board in one of the selected empty PCI/PCI-X slots. Once perfectly aligned with the slot's connector, press the board firmly but carefully into the connector.

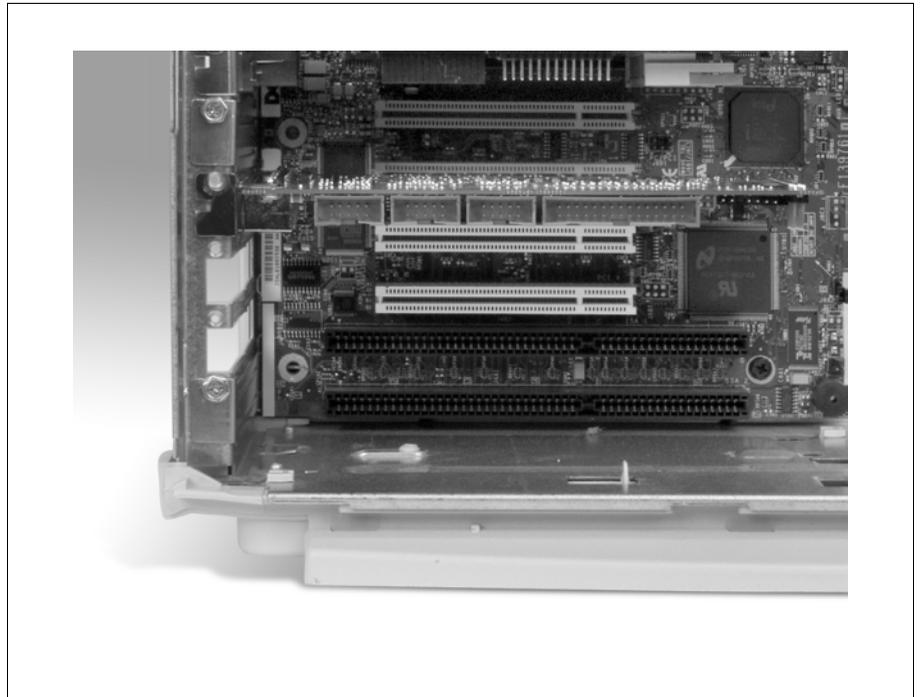

6. Anchor the board by replacing the bolt that you removed.
7. If required, install your expansion modules as described in the *Installing the Matrox Morphis Video Input module* section and the *Installing the Matrox Morphis Video and I/O module* section, later in this chapter.
8. Attach your video sources as described in the *Connecting video sources to Matrox Morphis* section, later in this chapter.
9. Turn on your computer.
 - ❖ Under Windows 2000/XP, when you boot your computer, Windows' Plug-and-Play system will detect a new Multimedia Video Device and you will be asked to assign it a driver. At this point, you should click on **Cancel** because the driver will be installed during the installation of Matrox Morphis software.


Installing Matrox Morphis for PC/104-Plus

This section refers to the installation of the Matrox Morphis Dual PC/104-Plus. Note that Matrox Morphis Dual PC/104-Plus can be used in conjunction with Matrox 4Sight-M.

Use the following steps to install your Matrox Morphis Dual PC/104-Plus board:


1. Check that you have an available PC/104-Plus PCI connector on the motherboard, or verify that your existing stack can support another board.
2. Remove the anchoring screws from the stack. Do not discard them since you will need them to fasten the Matrox Morphis Dual PC/104-Plus board.

- Carefully position Matrox Morphis Dual PC/104-Plus over the connectors and press the board firmly into place.

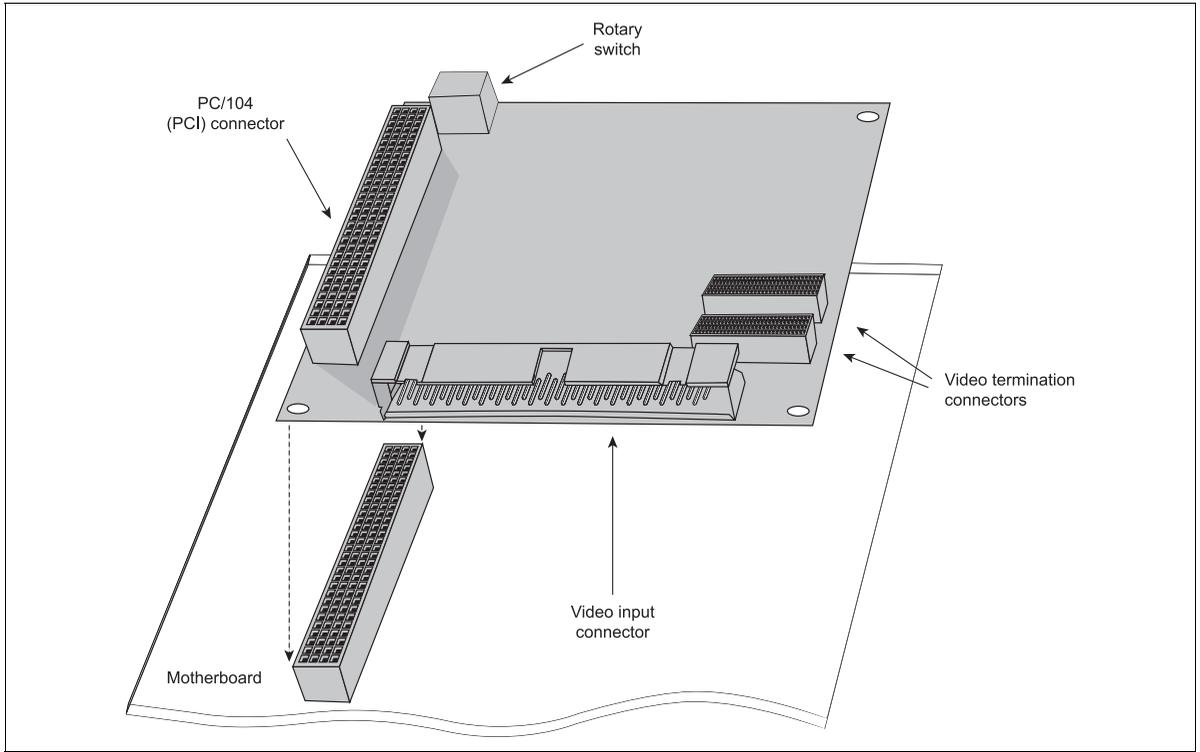


- Replace the anchoring screws.

- Interface the video input module to video input connector on the Matrox Morphis Dual PC/104-Plus board using the provided 40-pin flat ribbon cable. You can connect either end of the cable to the module. The cable connector will only latch properly when the red wire of the cable is closest to the board's jumpers.

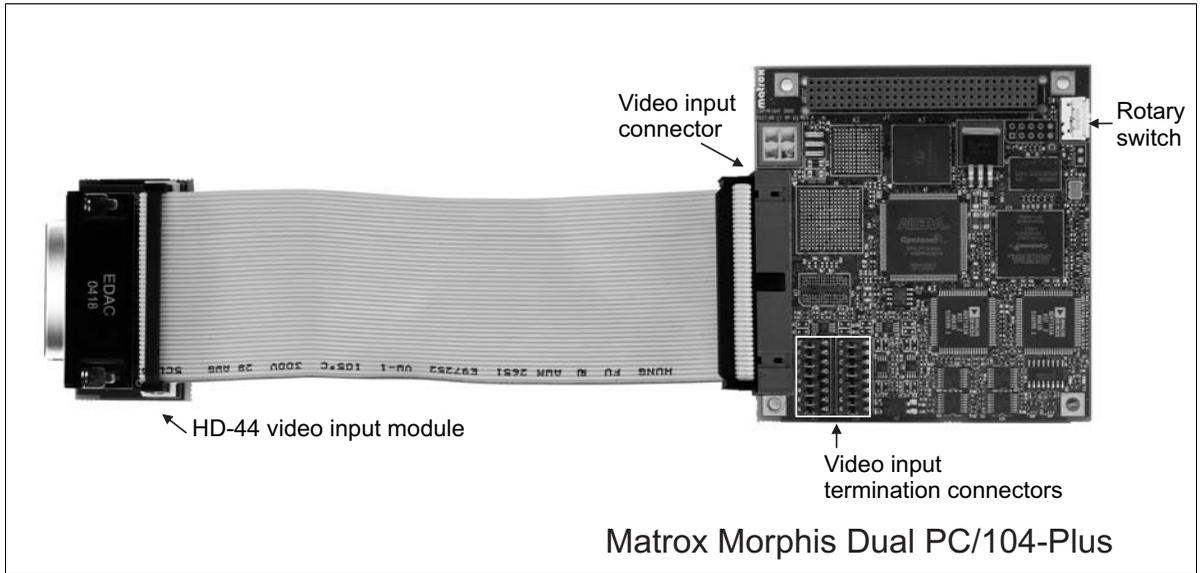

- Attach the DB-44 female connector to an available slot in your computer and fasten the screws. The following image shows a DB-44 connector installed in a Matrox 4Sight-M.

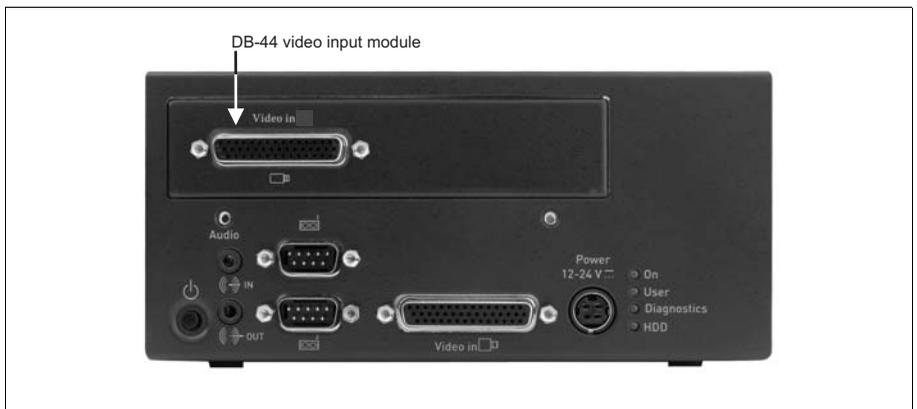


7. Set the rotary switch to 0 if installing the first stackable board, or another appropriate setting if not the first. For more information on installing multiple boards, see chapter 3, *Using multiple Matrox Morphis boards*.
8. Connect your video sources. For more information, see *Connecting video sources to Matrox Morphis* later in this chapter.
9. Turn on your computer.

In some cases, when you boot your computer, Windows' Plug-and-Play system will detect a new PCI card and you will be asked to assign a driver to it. At this point, you should click on **Cancel** because the driver will be installed during the installation of MIL or one of its derivatives.

Installing the cables for Watchdog functionality

Watchdog functionality is available on the Matrox Morphis Dual Standard, Dual HDC, and Quad boards. If Watchdog functionality is required:

1. Create a custom cable (Cable A) with a standard, 0.1" spacing, 2-pin female connector at one end, and at the other end, a connector that fits into the Reset button connector of the chassis (see the subsection *Video test and system reset connectors* of section *Base board input and output connectors* in *Appendix B: Technical information*).
2. Create a second custom cable (Cable B) with a standard, 0.1" spacing, 2-pin female connector at one end, and at the other end, a connector that fits into the motherboard reset connector (see the above-mentioned subsection).
3. Disconnect the end of the Reset button cable currently attached to the Reset button connector of the chassis, and attach Cable A to this connector instead.
4. Disconnect the end of the Reset button cable currently attached to your motherboard reset connector, and attach Cable B to this connector instead.
5. Connect Cable A to the J7 system reset connector of the Matrox Morphis base board (pins 5 and 6 of connector J5 for the Matrox Morphis Quad board).

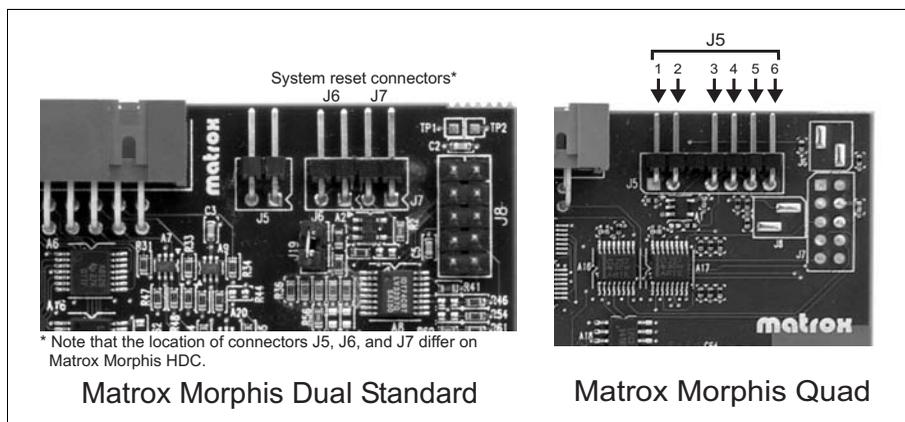


6. Connect Cable B to the J6 system reset connector of the Matrox Morphis base board (pins 3 and 4 of connector J5 for the Matrox Morphis Quad board).

Installing the Matrox Morphis Video Input module


To install a Matrox Morphis Video Input module to a Matrox Morphis Dual Standard or Quad board, proceed with the following steps:

1. Make sure that your Matrox Morphis base board is fastened to the computer chassis.
2. If the slot selected for the module is not a PCI/PCI-X slot, the module's tab might interfere with other components in the computer; if this is the case, you can break off the tab. The tab was added so that if used in a PCI/PCI-X slot, the module would have extra support and be more sturdy.

To break off the tab, use a set of pliers; there is a groove along the tab so that you can break it off without an excessive amount of force.

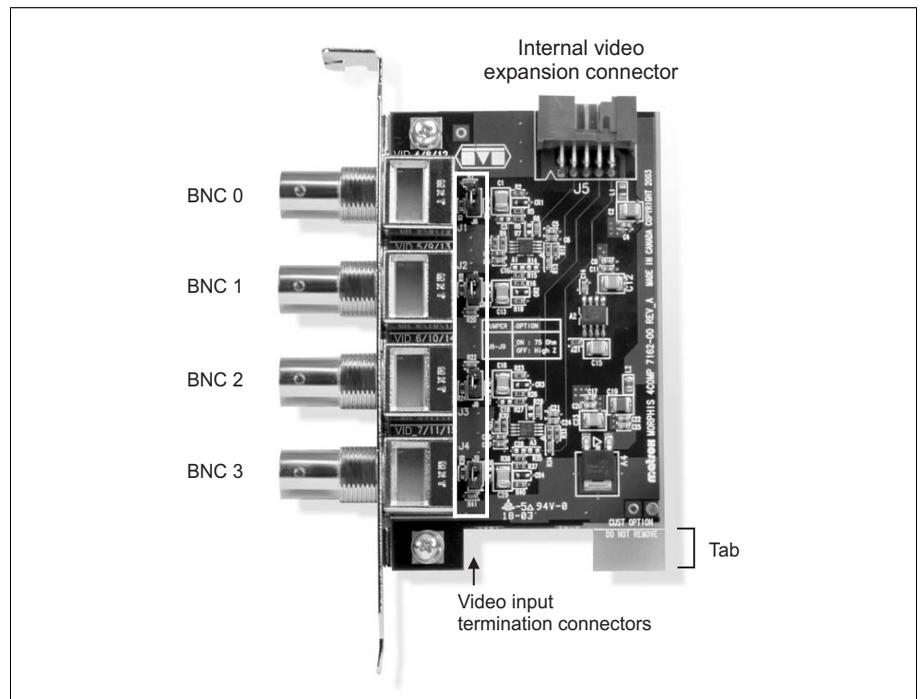


3. If you are installing the module in a PCI/PCI-X slot, align the module's tab with the slot's connector, and then press the module firmly but carefully into the slot's connector. For other types of slots, slide the module's bracket into the opening at the back of the selected slot.
4. Anchor the module's bracket to the chassis using the bolt that you removed in the first section.
5. Connect the Matrox flat ribbon cable, shipped with the module, to the internal video expansion connector of the module. You can connect either end of the cable to the module; the selected cable connector will latch properly only when the red wire of the cable is closest to the module's bracket.
6. Connect the other end of the Matrox flat ribbon cable to one of the video input expansion connectors on the base board. The cable connector will latch properly only when the red wire of the cable is closest to the module's bracket.

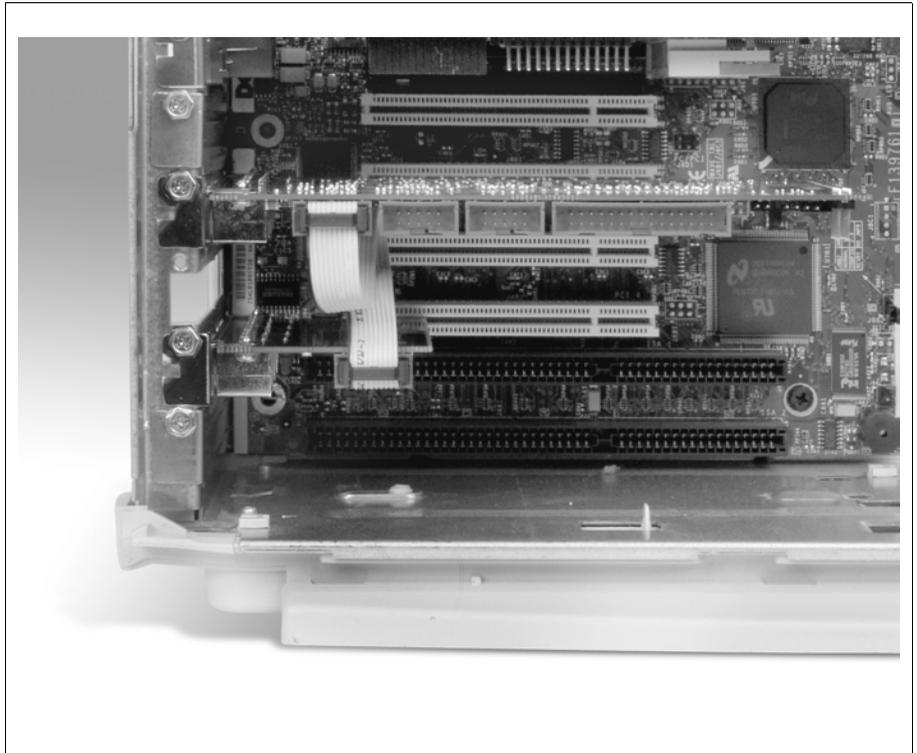

Important

Take note of the base board connector (J1, J2, or J3) to which you attach the cable. Each connector is associated with specific video input signals. When developing your application in software, you will need to know the video input signal that the required video source is driving.

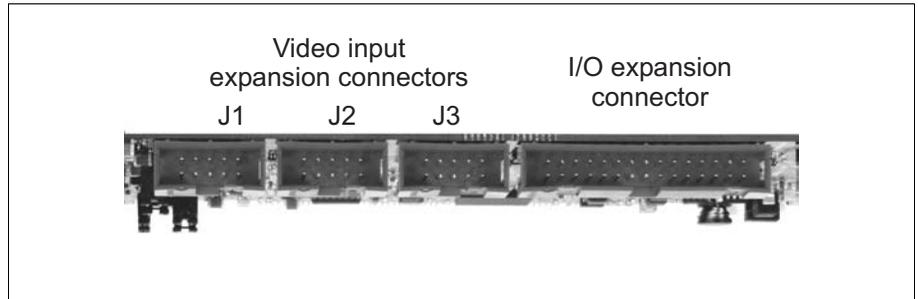


7. Repeat steps 2 through 6 for each Matrox Morphis Video Input module that you need to install. You can install up to 3 Matrox Morphis Video Input modules.

Installing the Matrox Morphis Video and I/O module

To install a Matrox Morphis Video and I/O module to a Matrox Morphis Dual Standard, Dual HDC, or Quad board, proceed with the following steps:

1. Make sure that your Matrox Morphis base board is fastened to the computer chassis.
2. If the slot selected for the module is not a PCI/PCI-X slot, the module's tabs might interfere with other components in the computer; if this is the case, you can break off the tab. The tabs were added so that if used in a PCI/PCI-X slot, the module would have extra support and be more sturdy.

To each of the internal video expansion connectors of the module, connect one of the other accompanying ribbon cables¹. You can connect either end of the cables to the module; the selected cable connector will latch properly only when the red wire of the cable is closest to the module's top edge.

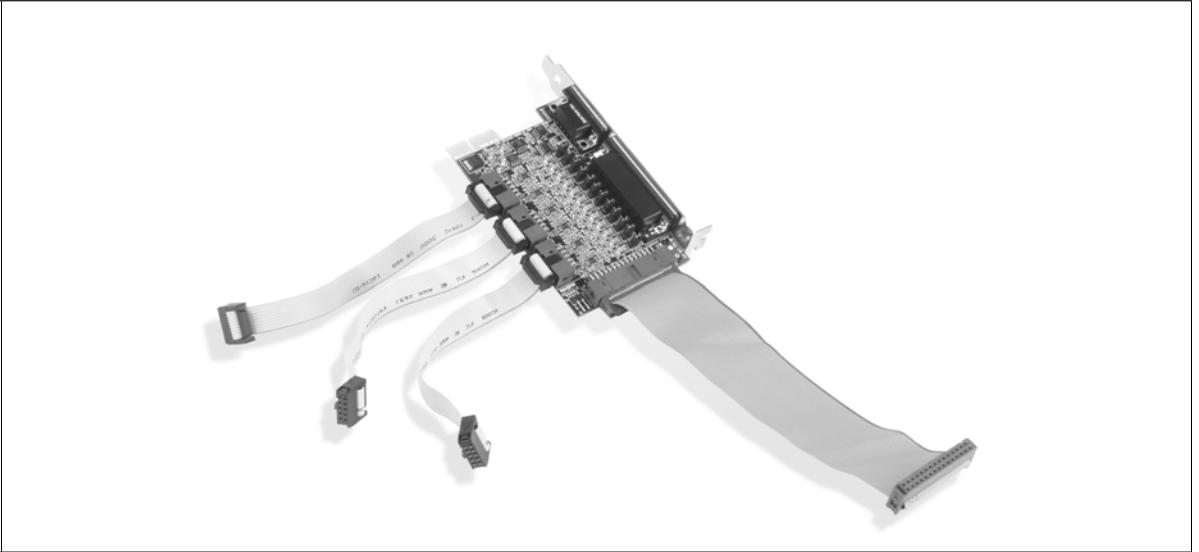


4. If you are installing the module in a PCI/PCI-X slot, align the module's tab with the slot's connector, and then press the module firmly but carefully into the slot's connector. For other types of slots, slide the module's bracket into the opening at the back of the selected slot.
5. Anchor the module's bracket to the chassis using the bolt that you removed in the first section.
6. Connect the other end of the Matrox flat ribbon cables to the base board.

1. Note, even if you are not using the module to capture video input, you must still connect an internal video expansion connector to a video input expansion connector on the base board, using one of these cables. The module draws power from the base board using these connectors; the opto-isolated trigger input components and the serial input/output components need to be powered.

To the J1 video input expansion connector (closest to the bracket) on the base board, connect the other end of the ribbon cable attached to the top-most video expansion connector on the module. To the J2 video input expansion connector, connect the other end of the ribbon cable attached to the middle video expansion connector. Then, to the J3 video input expansion connector, connect the other end of the ribbon cable attached to the bottom video expansion connector.

To the I/O expansion connector on the base board, connect the other end of the ribbon cable attached to the I/O expansion connector on the module.

In all cases, the red wire of the ribbon cable attached to the base board will be closest to the bracket.

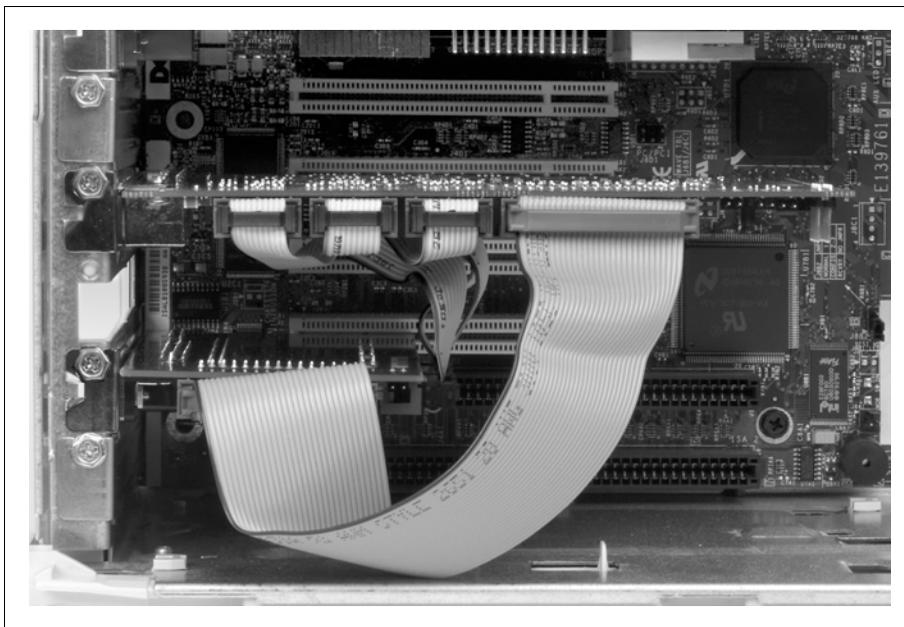


7. If you expect to test the video inputs arriving on the base board, connect the video test connector of the module to the video test connector of the base board using a custom cable. This connection allows you to output any of the CVBS video inputs, or the Y component of any Y/C video inputs, arriving on the base board (those from the Video and I/O module or those directly from the base board).

Connecting video sources to Matrox Morphis

The method of connecting video sources to your Matrox Morphis board depends on the type of board or module that you are trying to connect to. This section is divided up based on different types of boards or components that are interfaced in a similar fashion.

Connecting video to the Matrox Morphis Dual Standard, Quad, or Video Input module

The Matrox Morphis Dual Standard, Quad, and Video Input module have four BNC connectors on their bracket:

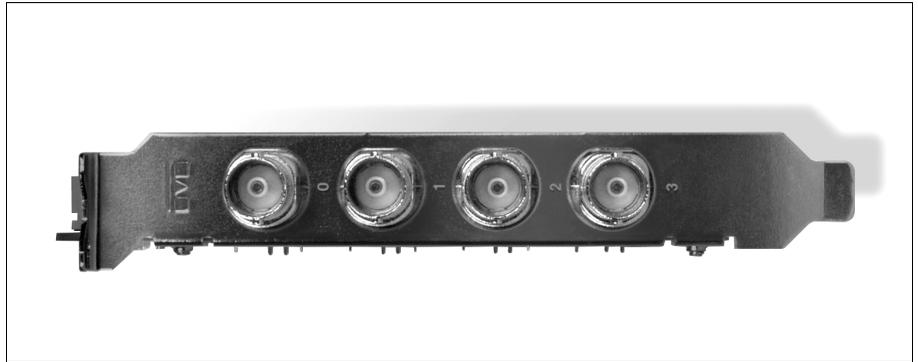

You can use a standard BNC to BNC video cable (available from your local electronic store) to interface a composite color or monochrome video source with one of these connectors. To interface a Y/C video source, you can use a custom cable, or you can use two BNC to BNC cables and a Matrox BNC-TO-SVHS adapter cable.

The video input expansion connector on the base board, to which a module is attached, establishes the video signal number associated with the module's BNC connectors. When developing your application, you will need to know the video input signal that a video source is driving.

BNC Connector #	Base board	Signals of the Video Input modules			Video source to connect and software channel number (MdigChannel())
		Connected to J1	Connected to J2	Connected to J3	
0	VID_IN0	VID_IN4	VID_IN8	VID_IN12	A CVBS video source (channel 0, 4, 8, and 12, respectively), or the Y component of a Y/C video source (channel 0, 2, 4, and 6, respectively).
1	VID_IN1	VID_IN5	VID_IN9	VID_IN13	A CVBS video source (channel 1, 5, 9, and 13, respectively), or the C component of the Y/C video source connected to BNC 0 (channel 0, 2, 4, and 6, respectively).
2	VID_IN2 ¹	VID_IN6	VID_IN10	VID_IN14	A CVBS video source (channel 2, 6, 10, and 14, respectively), or the Y component of a Y/C video source (channel 1, 3, 5, and 7, respectively).
3	VID_IN3 ²	VID_IN7	VID_IN11	VID_IN15	A CVBS video source (channel 3, 7, 11, and 15, respectively), or the C component of the Y/C video source connected to BNC 2 (channel 1, 3, 5, and 7, respectively).

1. Note, if configured for TTL trigger input 0 (TRIG_IN_0) (jumper on Berg connector J17 is positioned across pins 2 and 3), you cannot connect a video source to this BNC connector.
2. Note, if configured for TTL trigger input 1 (TRIG_IN_1) (jumper on Berg connector J18 is positioned across pins 2 and 3), you cannot connect a video source to this BNC connector.

Y/C input

Attach your video source to the BNC-TO-SVHS adapter cables, using the following cable information.

Connectors on video source	Wires on the BNC-TO-SVHS adapter cable
Luminance	Blue (Y)
Chrominance	Green (C)

Connecting video to the Matrox Morphis Dual HDC and PC/104-Plus

Matrox Morphis Dual HDC and PC/104-Plus have a high-density DB-44 female connector for video input. The connector is located on the bracket of the Dual HDC board and on a separate video input module for the Dual PC/104-Plus board.

To connect video to your Matrox Morphis board, plug the HD-44M-18BNC (for Matrox Morphis Dual HDC) or HD-44M-18BNC+ cable (for Matrox Morphis Dual PC/104-Plus) into the DB-44 video input connector.

Important

Note that the HD-44M-18BNC and the HD-44M-18BNC+ cables are not interchangeable. Although both cables have similar terminations, the pins are wired differently between the two. It is therefore important to always use the correct cable with your Matrox Morphis board.

The BNC connectors for the HD-44M-18BNC and the HD-44M-18BNC+ cables are labelled as follows:


BNC label	Signal	Video device to connect and software channel number (MdigChannel())
CH-0	VID_IN0	A CVBS video source (channel 0), or the Y component of a Y/C video source (channel 0).
CH-1	VID_IN1	A CVBS video source (channel 1), or the C component of the Y/C video source connected to BNC CH-1 (channel 0).
CH-2	VID_IN2	A CVBS video source (channel 2), or the Y component of a Y/C video source (channel 1).
CH-3	VID_IN3	A CVBS video source (channel 3), or the C component of the Y/C video source connected to BNC CH-2 (channel 1).
CH-4	VID_IN4	A CVBS video source (channel 4), or the Y component of a Y/C video source (channel 2).
CH-5	VID_IN5	A CVBS video source (channel 5), or the C component of the Y/C video source connected to BNC CH-4 (channel 2).
CH-6	VID_IN6	A CVBS video source (channel 6), or the Y component of a Y/C video source (channel 3).
CH-7	VID_IN7	A CVBS video source (channel 7), or the C component of the Y/C video source connected to BNC CH-6 (channel 3).
CH-8	VID_IN8	A CVBS video source (channel 8), or the Y component of a Y/C video source (channel 4).
CH-9	VID_IN9	A CVBS video source (channel 9), or the C component of the Y/C video source connected to BNC CH-8 (channel 4).

BNC label	Signal	Video device to connect and software channel number (MdigChannel())
CH-10	VID_IN10	A CVBS video source (channel 10), or the Y component of a Y/C video source (channel 5).
CH-11	VID_IN11	A CVBS video source (channel 11), or the C component of the Y/C video source connected to BNC CH-10 (channel 5).
CH-12	VID_IN12	A CVBS video source (channel 12), or the Y component of a Y/C video source (channel 6).
CH-13	VID_IN13	A CVBS video source (channel 13), or the C component of the Y/C video source connected to BNC CH-12 (channel 6).
CH-14	VID_IN14	A CVBS video source (channel 14), or the Y component of a Y/C video source (channel 7).
CH-15	VID_IN15	A CVBS video source (channel 15), or the C component of the Y/C video source connected to BNC CH-14 (channel 7).
TRIG-0	PO_TTL_TRIG_IN	TTL trigger input for acquisition path 0. Allows image synchronization to be coordinated with an external event.
TRIG-1 ¹	P1_TTL_TRIG_IN	TTL trigger input for acquisition path 1. Allows image synchronization to be coordinated with an external event.
OPTO TRIG-1 ²	P1_OPTO_TRIG_IN	Opto-isolated trigger input for acquisition path 1. Allows image synchronization to be coordinated with an external event.

1. Only on HD-44M-18BNC
2. Only on HD-44M-18BNC+

Connecting to the Video and I/O module

The Matrox Morphis Video and I/O module has two connectors on its bracket:

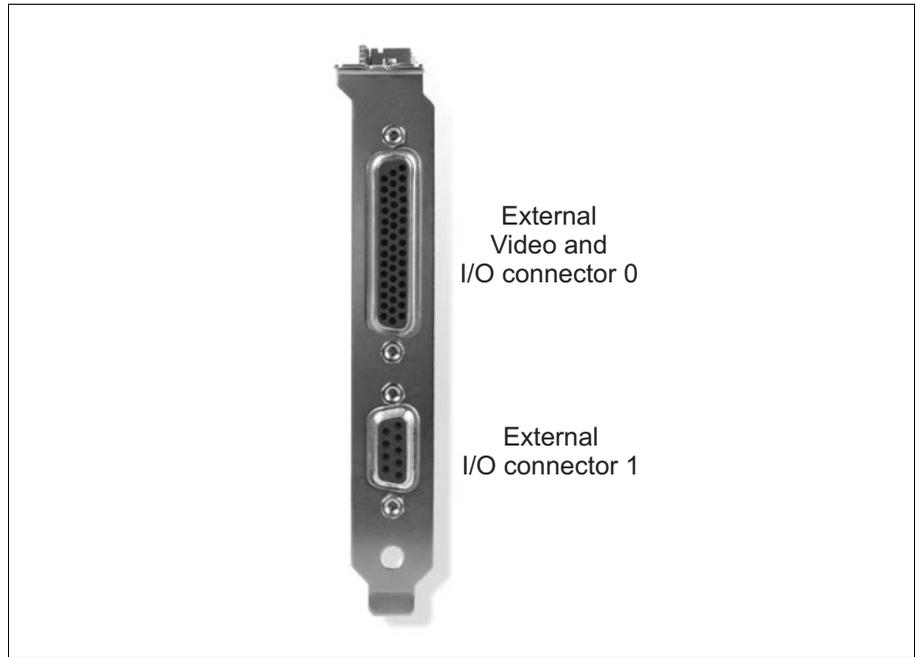

- **External Video and I/O connector 0.** Used to receive video input and user-defined signals, and transmit user-defined and video test output signals. You can connect up to 12 video sources to this connector.
- **External I/O connector 1.** Used to receive trigger signals and connect to an RS-485 two-wire multi-drop network.

Connecting external devices to External Video and I/O connector 0

Using the DBHD44-TO-13BNC or DH44-TO-13BNC/O optional Matrox cable, you can attach video sources to External Video and I/O connector 0 of the module. Both of these cables have thirteen BNC connectors, and a DB-44 plug; the DH44-TO-13BNC/O cable also has open ended wires to access the user-defined signals.

The wires with the BNC connectors are numbered as follows:

BNC # ¹	Signal	Video device to connect and software channel number (MdigChannel())
1	VID_IN4	A CVBS video source (channel 4), or the Y component of a Y/C video source (channel 2).
2	VID_IN5	A CVBS video source (channel 5), or the C component of the Y/C video source connected to BNC 1 (channel 2).
3	VID_IN6	A CVBS video source (channel 6), or the Y component of a Y/C video source (channel 3).
4	VID_IN7	A CVBS video source (channel 7), or the C component of the Y/C video source connected to BNC 3 (channel 3).
5	VID_IN8	A CVBS video source (channel 8), or the Y component of a Y/C video source (channel 4).
6	VID_IN9	A CVBS video source (channel 9), or the C component of the Y/C video source connected to BNC 5 (channel 4).
7	VID_IN10	A CVBS video source (channel 10), or the Y component of a Y/C video source (channel 5).
8	VID_IN11	A CVBS video source (channel 11), or the C component of the Y/C video source connected to BNC 7 (channel 5).
9	VID_IN12	A CVBS video source (channel 12), or the Y component of a Y/C video source (channel 6).
10	VID_IN13	A CVBS video source (channel 13), or the C component of the Y/C video source connected to BNC 9 (channel 6).
11	VID_IN14	A CVBS video source (channel 14), or the Y component of a Y/C video source (channel 7).
12	VID_IN15	A CVBS video source (channel 15), or the C component of the Y/C video source connected to BNC 11 (channel 7).
13	PO_VID_OUT	A device that accepts the video test output.

1. The wire color associated with each BNC number can be determined using the color code pinout chart included with the DBHD44-TO-13BNC or DH44-TO-13BNC/O cable.

Y/C input

The module supports a maximum of six Y/C inputs. To connect a Y/C video source to Matrox Morphis, connect BNC-TO-SVHS adapter cables to your DBHD44-TO-13BNC or DH44-TO-13BNC/O cable. Then, attach your video source to the BNC-TO-SVHS adapter cables, using the following cable information.

Connectors on video source	Wires on the BNC-TO-SVHS adapter cable
Luminance	Blue (Y)
Chrominance	Green (C)

Chapter

3

Using multiple Matrox Morphis boards

This chapter explains how to use multiple Matrox Morphis boards.

Multiple board installation

This section describes how to use multiple Matrox Morphis boards.

Install each additional Matrox Morphis board as you installed the first board (refer to chapter 2, *Installing Matrox Morphis for PCI/PCI-X*).


Installing multiple PCI/PCI-X boards

When installing Matrox Morphis Dual Standard, Dual HDC, and Quad, you can theoretically have as many as 16 Matrox Morphis boards installed in your computer at one time. This number is, however, limited by the number of empty slots in your computer and, for simultaneous image capture, by the available bandwidth of your computer (discussed later in this chapter).

Using MIL-Lite, you have to allocate a MIL system for each board and allocate the resources of each MIL system.

Installing multiple PC/104-Plus boards

The number of Matrox Morphis Dual PC/104-Plus boards that you can stack depends on the computer that you are using. If using a Matrox 4Sight-M integrated unit, you can stack a maximum of three PC/104-Plus boards, as shown in the diagram below.

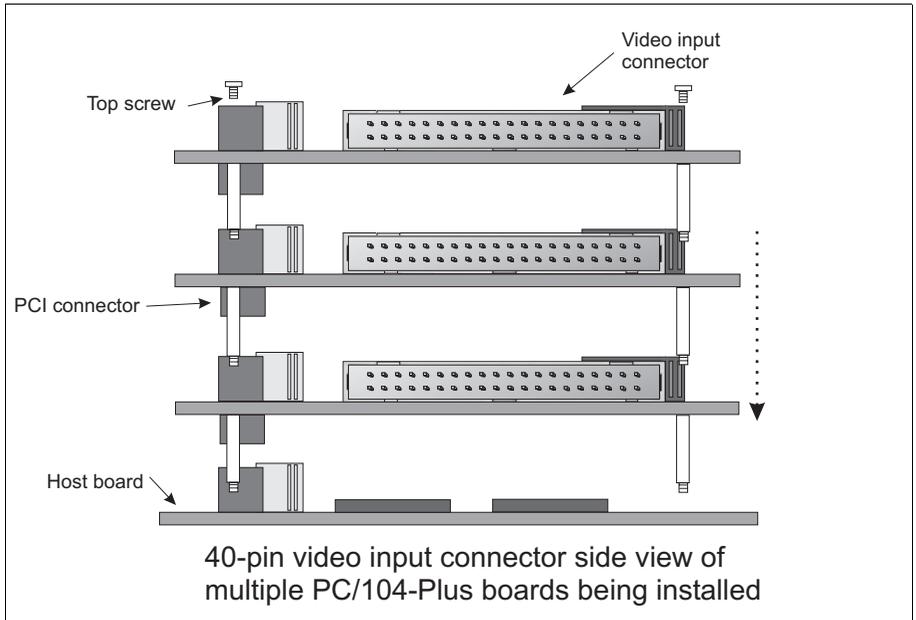

In addition, you must set the rotary switch of each PC/104-Plus board to a unique setting in the stack. Setting the rotary switch dedicates a group of PCI signals to the board in the stack: clock, request grant, ID select, and interrupt signals. It is recommended that the first board installed (the board closest to the Host CPU board) be configured to 0, the second to 1, and so on. The table below shows the recommended switch setting for each board, as well as the corresponding settings for the dedicated signals.

Switch position	Board position	Interrupt	Request grant	ID select
0 or 4	1	Interrupt A	0	0
1 or 5	2	Interrupt B	1	1
2 or 6	3	Interrupt C	2	2
3 or 7	4	Interrupt D	2	3

Using MIL-Lite, you have to allocate a MIL system for each board and allocate the resources of each MIL system.

Simultaneous image capture from different boards

You can simultaneously capture images from video sources attached to different Matrox Morphis boards; however, Matrox Morphis is susceptible to PCI/PCI-X bus latency. Therefore, the number of video sources from which you can simultaneously capture images is determined by the PCI/PCI-X bandwidth available in your computer. In addition, sustained PCI/PCI-X-transfers to memory require the use of a high performance PCI/PCI-X core-logic chipset.

Assuming a high performance chipset is used, you should not have any PCI/PCI-X bandwidth problems capturing the following number of full-sized color images simultaneously from multiple Matrox Morphis boards. Capturing more than this number might result in PCI/PCI-X bandwidth problems.

Transfer mode of full-sized color images	Number of images captured simultaneously without PCI/PCI-X bandwidth problems		
	33 MHz PCI slot	66 MHz PCI slot	133 ¹ MHz PCI-X slot
RGBX (32-bit) mode	2	4	4
YUV16 mode	4	8	8

1. Note that with two Matrox Morphis Quad boards, the bus will run at 100 MHz, and with three, it will run at 66 MHz.

- ❖ Note that grabbing images from the same board requires the same amount of PCI/PCI-X bandwidth as grabbing them from two different boards.

As a reference point, capturing one full-sized NTSC or PAL image in real time will require a PCI bandwidth of 35 Mbytes/sec or 42 Mbytes/sec, respectively, when transferring in RGBX (32-bit) mode.

It is recommended that when capturing more than two images simultaneously over a PCI interface, you either use a 66 MHz PCI slot, use a different transfer mode, or reduce the image size to avoid reaching the upper limits of the overall available bandwidth.

Chapter

4

Hardware reference

This chapter explains the architecture of the Matrox Morphis hardware, as well as the available features and modes.


Matrox Morphis hardware reference

This chapter provides information on the architecture, operating modes, and supported features of Matrox Morphis. For a summary of the information given in this chapter and detailed specifications of connectors and pinouts, refer to *Appendix B: Technical information* of this manual.


Acquisition section

The acquisition section of Matrox Morphis can capture RS-170 /CCIR monochrome video and composite (CVBS) and component (Y/C) video in NTSC /PAL format. The acquisition sections of the Matrox Morphis Dual Standard, HDC, and PC/104-Plus have two independent acquisition paths, whereas the Quad has four. These independent acquisition paths allow Matrox Morphis to simultaneously capture from any two or four connected, supported, synchronous or asynchronous video sources, depending on the board. In addition, all boards can switch the capture between any connected video source of the same type with minimum latency (fast switching). The speed of switching will increase linearly in relation to the number of available decoders.


The following diagram illustrates the main components of the acquisition section of Matrox Morphis Dual.

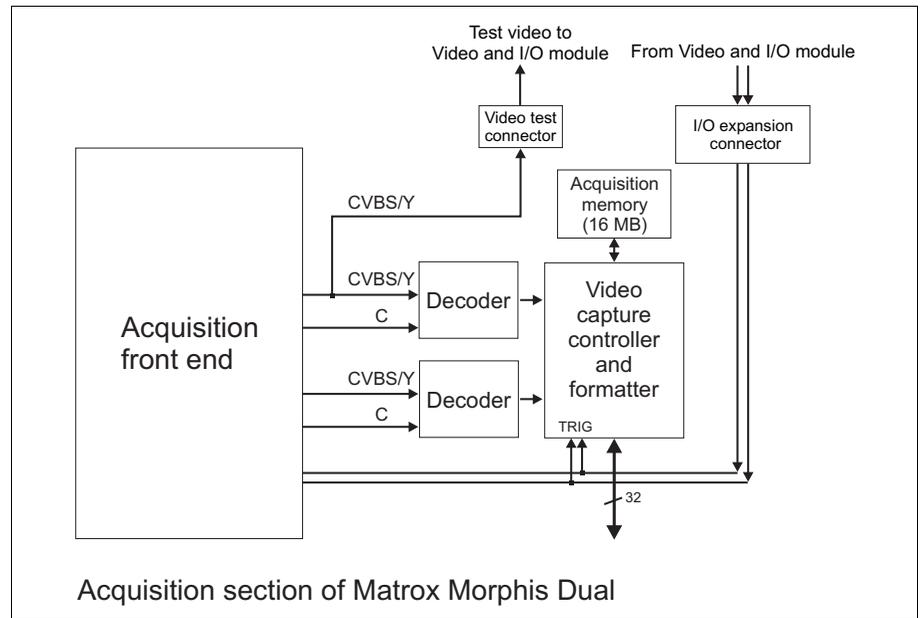

The following diagram illustrates the different acquisition front ends of the Matrox Morphis Dual boards.

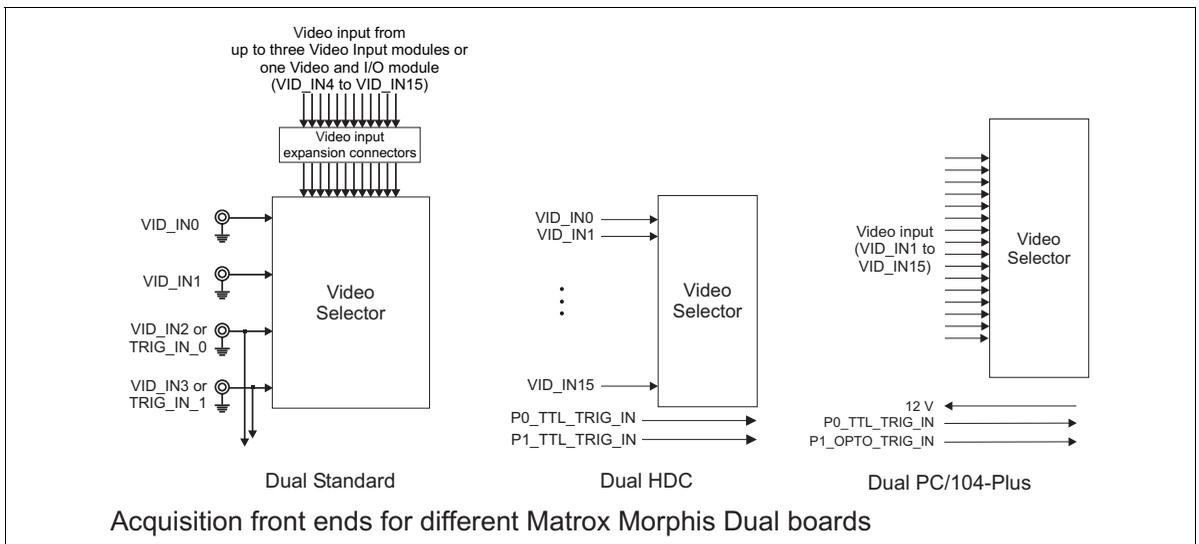

The following diagram illustrates the main components of the acquisition section of the Matrox Morphis Quad.

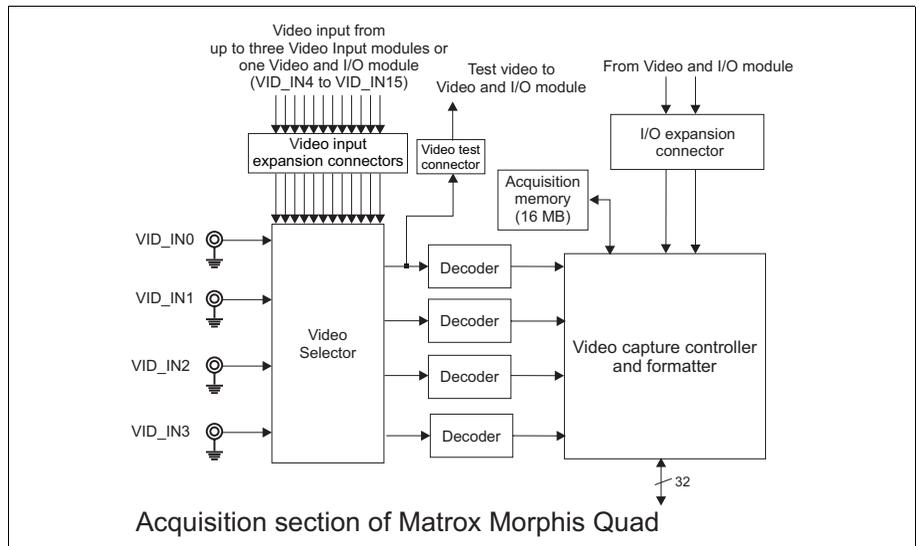


To grab from a video source, allocate a MIL digitizer with a DCF that matches the video source's data type, using the MIL-Lite function **MdigAlloc()**; a MIL digitizer represents the acquisition path(s) with which to grab from one input source of the specified type. Then, using the returned MIL digitizer identifier, call **MdigGrab()**.

To grab video data from multiple video sources simultaneously, allocate the appropriate number of digitizers with **MdigAlloc()** and specify different device numbers for each.

Video Selector

The Video Selector is responsible for routing the video inputs to the appropriate decoder, as well as routing the input to decoder 0 to the video test connector in the Matrox Morphis Dual Standard, Dual HDC, and Quad.

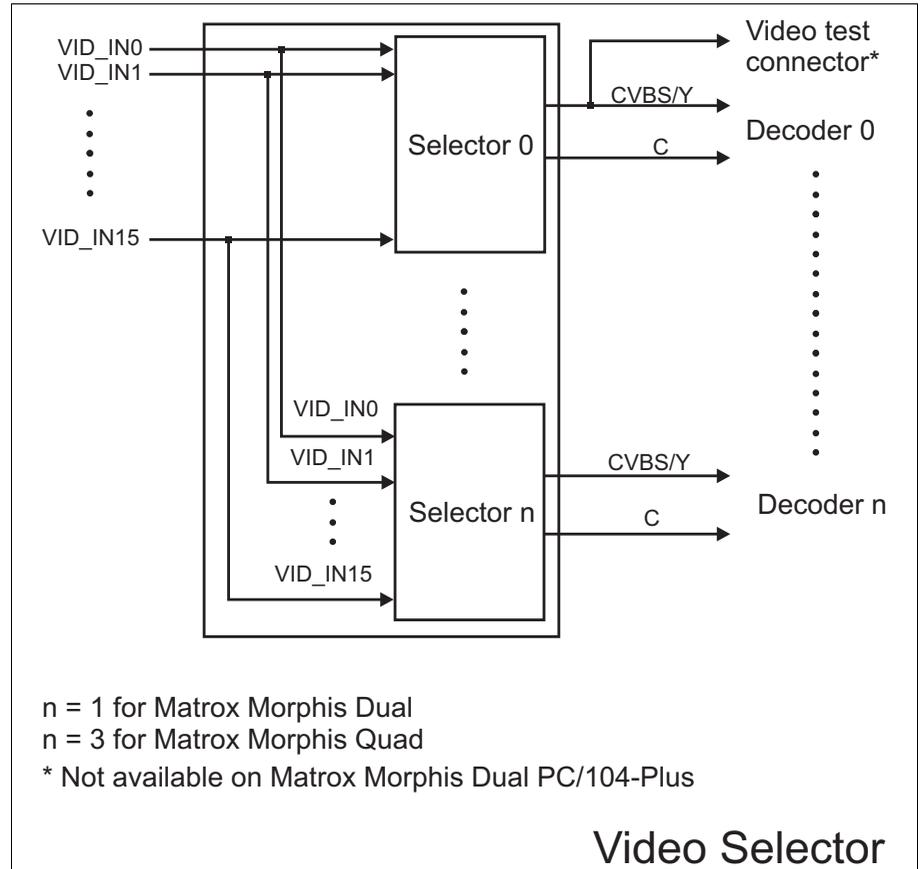

The Video Selector can, for each decoder, perform fast switching between connected video sources of the same type. In addition, the speed of switching will increase linearly in relation to the number of available decoders. If Matrox Morphis Dual, for example, is not simultaneously capturing from two video sources, the Video Selector can perform ultra-fast switching between video sources. In this case, the new input is routed to the idle decoder so that while the current capture is in process, the next capture is being set up.

Input channels

For each of the video decoders, the Video Selector can switch between 16 CVBS/monochrome or 8 Y/C video sources, or a combination of both. The video sources can be connected to the base board and/or to one of the Matrox Morphis expansion modules. For fast or ultra-fast channel switching, the video sources must be of the same type.

As a standard feature on the Matrox Morphis Dual Standard and Quad, you can connect up to 4 CVBS/monochrome or 2 Y/C video sources, or a combination of both, to the base board. To each of a maximum of three Matrox Morphis Video Input modules, you can connect the same number of video sources as is supported by the base board. To the Matrox Morphis Video and I/O module, you connect 12 CVBS/monochrome or 6 Y/C video sources, or a combination of both.

- ❖ Note that you can only connect a single Matrox Morphis Video and I/O module to the base board, and that the Matrox Morphis Video and I/O module and the Matrox Morphis Video Input module are mutually exclusive.

To switch between video sources of the same type for each MIL digitizer, use `MdigChannel()`.

Video input testing

With the exception of Matrox Morphis Dual PC/104-Plus, you can test the CVBS/monochrome video input or the Y component of the Y/C video input that is routed to decoder 0. To test the video signal, it can be output to the video test connector. If you have a Matrox Morphis Video and I/O module, this video signal can be sent out through external Video and I/O connector 0 (HD-44). You can connect this output to a monitor to establish, for example, the channel to which a video source is connected. When performing ultra-fast channel switching, this output is not very useful because most monitors cannot synchronize to this output and because every second switch causes the video input to be routed to decoder 1.

Video decoders

The acquisition section has either two or four multi-standard video decoders, depending on the board type. These decoders feature internal filtering and automatic gain control, in addition to digitizing video.

Gain

The video decoders feature automatic gain control (AGC). This allows the video signal input range to be optimized before being digitized. You can, however, disable the AGC and set the gain manually, using the `MdigControl()` function, with `M_GRAB_AUTOMATIC_INPUT_GAIN` set to `M_DISABLE` and `M_GRAB_INPUT_GAIN` set to any integer value from 0 to 255.

Digitizing component

The multi-standard video decoders can convert analog composite (CVBS) and component (Y/C) video in NTSC/PAL format, to digitized video in YUV 4:2:2.

Each decoder supports the following video timing parameters:


	Square pixel video formats	
	NTSC	PAL
Pixel sampling rate (MHz)	12.27	14.75
Y component sampling rate (MHz)	12.27	14.75
U and V components (MHz)	6.14 each	7.38 each
Digitizing component sampling rate (MHz)	24.54	29.5
Field rate (Hz)	60	50
Pixel/line (Pixels)	780	944
Active pixel/line (Pixels)	640	768
Active lines/frame (Lines)	480	576
Line rate (KHz)	15.734	15.625

Video capture controller and formatter

Once the analog video has been converted to digitized video, it enters a component called the *video capture controller and formatter*.

The video capture controller and formatter accepts all data signals provided by the decoders, and formats the digitized video for transfer to Host or graphics controller memory.

The following diagram illustrates the video capture controller and formatter found on Matrox Morphis.

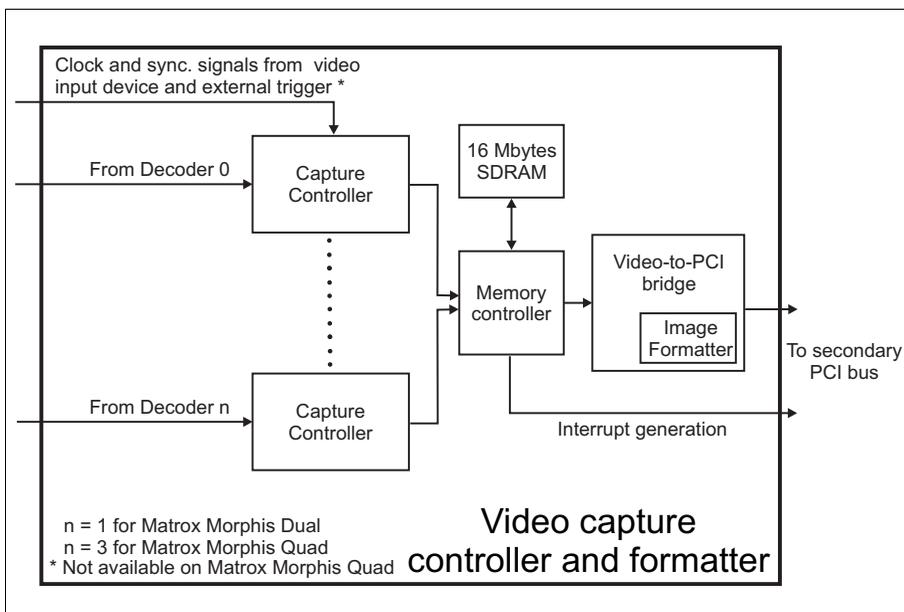

The video capture controller and formatter contains the following elements:

- Capture controller.
- Memory controller.
- Video-to-PCI bridge (which includes an image formatter).

Capture controllers

There are either two or four capture controllers in the video capture controller and formatter. Each capture controller has the following functions:

- Each sets the conditions under which to start and end a grab. Examples of grabbing conditions are whether to grab one or two fields per frame, or whether to start the grab on an odd or even field. Set the capture controller conditions using the MIL/MIL-Lite **MdigControl()** function.

- Each can generate interrupts, based on various grabbing events. You can hook a function to these events using the **MdigHookFunction()** function. The various events that can cause an interrupt are listed in the following table:

Hook Type	Description
M_GRAB_START	Hook to the start of each grab.
M_GRAB_END	Hook to the end of each grab.
M_GRAB_FIELD_END_ODD	Hook to the end of grabbed odd fields.
M_GRAB_FIELD_END_EVEN	Hook to the end of grabbed even fields.
M_FRAME_START¹	Hook to the start of the incoming signal's frames.
M_FIELD_START_ODD¹	Hook to the start of the incoming signal's odd fields.
M_FIELD_START_EVEN¹	Hook to the start of the incoming signal's even fields.

1. These events occur even when a video source is connected but not grabbing.

- Each receives clock and synchronization signals from the video source and, with the exception of Matrox Morphis Quad, accepts an external trigger input.

Trigger

With the exception of the capture controllers on Matrox Morphis Quad, each capture controller accepts an independent external trigger input, which allows image acquisition to be synchronized with an external event.

From the BNC connectors of the Dual Standard board, the trigger input is received directly in TTL format; whereas from the Matrox Morphis Video and I/O module, the trigger input is received through an opto-coupler, which isolates the rest of the circuitry from outside surges.

When receiving the trigger through the opto-coupler, the voltage difference across the positive and negative components of the signal must be between 4.05 V and 9.16 V for high level voltage, and between -4.5 V and 0.8 V for low level voltage.

Each capture controller operates in *next valid frame/field* (synchronous) mode. In this mode, the capture controller waits for the next valid frame or field (depending on whether grabbing a frame or a field) before commencing the grab.

Acquisition in next valid frame/field mode is executed in one of two ways:

- **Edge-triggered acquisition.** The capture controller waits for the rising/falling edge of the trigger to capture a frame/field.
- **Level-sensitive acquisition.** The capture controller waits for the level of the trigger to become high/low to capture a frame/field. The polarity of the active and inactive levels of the trigger signal are programmable.

To grab upon a trigger, you must enable trigger detection and specify the trigger mode and trigger source, using the MIL-Lite `MdigControl()` function.

Memory controller

The memory controller is responsible for toggling between the incoming video data, storing it in the 16 Mbytes of on-board acquisition memory, and upon request, transferring it to the video-to-PCI bridge. After storing the video, an interrupt is generated notifying the Host of the acquired data. The Host is then responsible to request its transfer to the optional JPEG2000 controller, Host memory, off-board display memory, or other PCI devices across the PCI bus. Upon receiving the request, the memory controller transfers the data to the video-to-PCI bridge.

Video-to-PCI bridge

The video-to-PCI bridge is capable of high-speed transfers to Host memory, off-board display memory, or other PCI devices across the PCI bus. It can also send the video to the optional compression/decompression section of the board. Upon transmitting the video data, the video-to-PCI bridge can format the data with its image formatter.

Image formatter

The image formatter can perform several operations:

- **Image resizing.** Captured data can be cropped (ROI capture) or it can be arbitrarily downsampled to 1/16th of a field or frame. This can be useful to implement custom software-based motion detection because at a reduced scale, image comparison is faster.
- **Vertical/horizontal flipping.** Captured data can be flipped vertically or horizontally, or both.

- **Color-space conversion.** Captured data can be converted into the following formats with square pixels: RGB planar, BGR32 packed, YUV16 packed (stored in YUYV format), and 8-bit monochrome. The image formatter can also perform *color kill*, which converts the data to grayscale and then converts it to the appropriate destination format.

The equations for the conversions are as follows:

Color space conversion	Equations
YUV-to-Y	<ul style="list-style-type: none"> • $Y = Y$
YUV-to-RGB	<ul style="list-style-type: none"> • $R = Y + 1.4017 V$ • $G = Y - 0.3437 U - 0.7142 V$ • $B = Y + 1.7722 U$
YUV-to-YCrCb	<ul style="list-style-type: none"> • $Y = Y \times 220/256 + 16$ • $Cb = (U - 128) \times (113/256) + 128$ • $Cr = (V - 128) \times (113/256) + 128$

I/O controller

The I/O controller is responsible for routing user-defined signals and controlling the RS-485 serial interface of the Video and I/O module. The I/O controller also integrates Watchdog circuitry for automatically recovering from application or system failure.

- ❖ Note that the RS-485 serial interface and the integrated Watchdog circuitry are only available with the Matrox Morphis Dual Standard, Dual HDC, and Quad.

User-defined signals

Using the I/O controller, Matrox Morphis supports 16 user-defined TTL compatible (5 V) signals for synchronizing with or controlling other devices, such as a strobe light. The signals can be programmed for input or output. All user-defined input signals can also generate an interrupt.

The user-defined signals can be accessed inside the chassis from the I/O expansion connector of the base board, or accessed externally from the bracket of the Matrox Morphis Video and I/O module.

These user-defined signals are programmed using the MIL-Lite function `MsysControl()` with `M_USER_BIT_...`

For information on the electrical specification of user-defined signals, see the section *Electrical specifications* in *Appendix B: Technical information*.

RS-485 serial interface

Using the Video and I/O module, Matrox Morphis offers an RS-485 serial interface. It is mapped as a COM port so that the interface can be accessed through the Win32 API. The serial interface can both receive and transmit signals, but in half-duplex mode. The serial interface can be connected to an RS-485 two-wire multi-drop network.

The interface is controlled by a Universal Asynchronous Receiver-Transmitter (UART)¹ circuit in the I/O controller. Matrox Morphis integrates a 16450-compatible UART, which features independently programmable baud rates (maximum recommended baud rate = 9600 baud).


The RS-485 interface supports multiple devices, and distances of up to 4000 feet. In addition, with the RS-485 interface, data communication uses differential signaling.

You can use the serial interface to connect Matrox Morphis to a multi-drop network. This allows you to connect Matrox Morphis to multiple devices that are already connected to each other through this network.

1. The UART implementation was derived from a design by Daniel Wallner. Please see *Appendix D: Acknowledgments* for copyright information.


Two-wire multi-drop network

Since, as mentioned earlier in this section, the serial interface can only operate in half-duplex mode, it can only be connected to a RS-485 two-wire multi-drop network shown below. Note that Matrox Morphis does not have a termination resistor nor bias resistors.

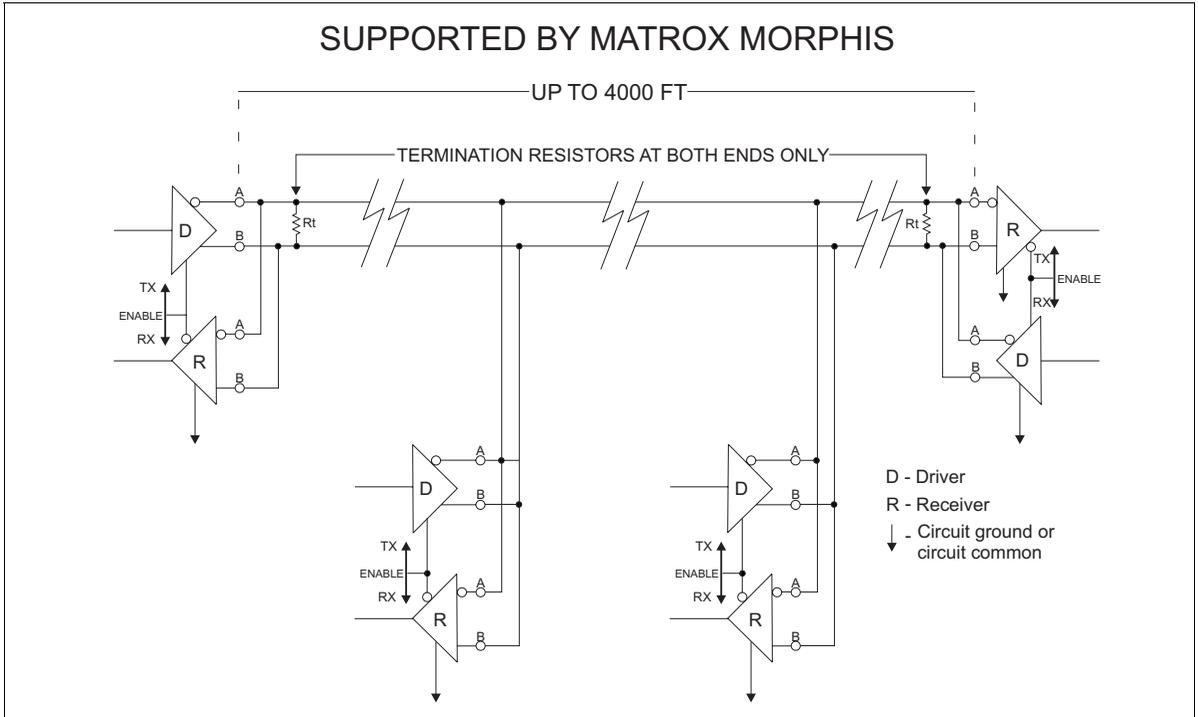

Four-wire multi-drop network

Matrox Morphis cannot be connected to a four-wire multi-drop network.

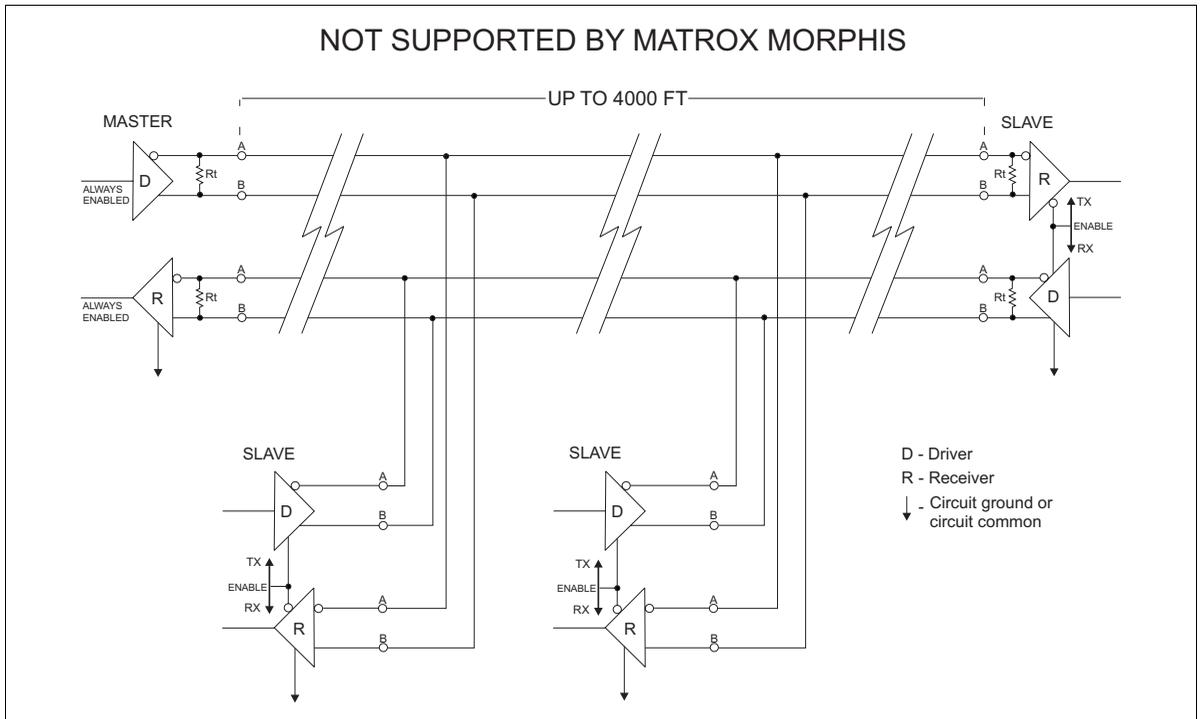

Watchdog circuitry

The I/O controller integrates Watchdog circuitry to automatically recover from application or system failure. The Watchdog circuitry automatically reboots your computer when, for some reason, your computer hangs for longer than a pre-set amount of time.

The Watchdog circuitry works based on several integrated timers. When the Watchdog circuitry is enabled, it must receive a reset signal from the user application within the time specified by a timer. Every time the signal is received, Watchdog resets this timer. If, however, the Watchdog circuitry does not receive a reset signal for a period longer than the time allotted by this timer, it will either send a warning interrupt signal or a hardware signal to reboot the computer, depending on the timer.

There are three main timers that make up the Watchdog circuitry:


- **Warning timer:** If, during the course of regular operations, the Host computer does not reset the warning timer before the specified interval expires, it is assumed to have hung. The Watchdog's warning timer will then generate a warning interrupt.
- **Timeout timer:** If, during the course of regular operation, the Host computer does not reset the timeout timer before the specified interval expires, it is assumed to have hung. The Watchdog's timeout timer will then force the Host computer to reboot.
- **Reboot timer:** If, during a reboot, the Host computer does not start regular operations before the specified interval expires, the Host computer is assumed to have hung. The Watchdog's reboot timer will then force the Host computer to reboot again.

You can enable the Watchdog circuitry and set and reset the Watchdog timers using the MIL-Lite `MsysControl()` function. You can hook an event handler function to the warning interrupt using `MsysHookFunction()`.

Compression/decompression accelerator

Matrox Morphis Dual supports a JPEG2000 image compression/decompression accelerator that can be purchased alone or with the acquisition section.

The JPEG2000 image compression/decompression accelerator supports real-time compression/decompression of monochrome and color video, for typical video rates. The video can be arriving from the acquisition section of Matrox Morphis or from the Host. For video arriving from the Host, Matrox Morphis supports JPEG2000 tiling with intervention from the Host. For more information on tiling, refer to the MIL *Board Specific Notes*.

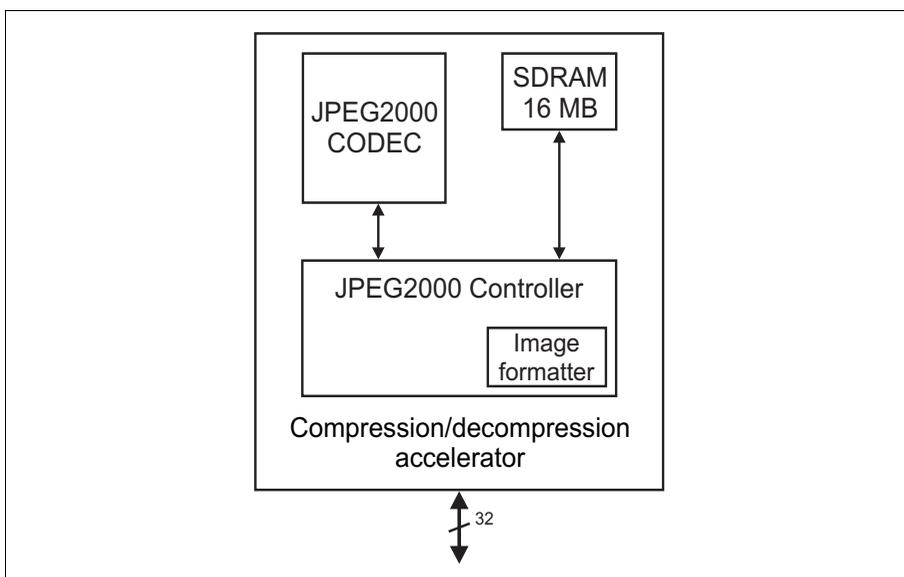

JPEG2000 controller

The JPEG2000 controller of the accelerator is responsible for interfacing with the secondary PCI bus and for transferring data to and from the JPEG2000 CODEC. The JPEG2000 controller has an integrated image formatter for formatting uncompressed data to the appropriate format before transferring it to the JPEG2000 CODEC or the secondary PCI bus. It can convert the data to YUV16 (4:2:2 in YUYV format) 8-bit, 10-bit, or 12-bit, and to 8-bit, 10-bit, or 12-bit monochrome. If transferring uncompressed data to the secondary PCI bus, it can also convert the data to 16-bit monochrome.

Upon receiving data from the secondary PCI bus, the controller transfers the data to the 16 Mbytes of compression/decompression memory; the entire image/tile must be saved in this memory before compression or decompression. When the JPEG2000 CODEC is available, the controller transfers the compressed or uncompressed image/tile to the CODEC, converting it to the requested format (bit-alignment) and performing the compression or decompression. When the CODEC has finished compressing or decompressing the image/tile, the controller transfers it to compression/decompression memory, converting it to the requested format. When the secondary PCI bus is available, the controller transfers the compressed/decompressed image/tile to Host memory, converting it to the requested format if required. Decompressed images/tiles can also be transferred to off-board display memory or other PCI devices across the PCI bus.

JPEG2000 CODEC

The JPEG2000 CODEC can compress/decompress YUV16 (4:2:2 in YUYV format) 8-bit, 10-bit, or 12-bit image data, and 8-bit, 10-bit, or 12-bit single component image data.

The JPEG2000 CODEC supports lossy (9/7 wavelet) and lossless (5/3 wavelet) modes.

PCI interface

The Matrox Morphis board allows the transfer of live video to Host memory, off-board display memory, or other PCI devices across either a PCI or PCI-X bus.

All Matrox Morphis boards feature an on-board 32-bit 33/66 MHz PCI bus master to reduce CPU usage. The board can also generate interrupts for the start and end of a field, frame, and sequence capture.

Matrox Morphis Dual Standard and Dual HDC have a 32-bit synchronous PCI bus interface, which is capable of a peak transfer rate of 132 Mbytes/sec when operating at 33 MHz or 264 Mbytes/sec when operating at 66 MHz.

Matrox Morphis Quad has a 64-bit asynchronous PCI-X bus interface which is capable of a peak transfer rate of 1056 Mbytes/sec when operating at 133 MHz.

Matrox Morphis Dual PC/104-Plus has a 32-bit synchronous PCI bus interface, which is capable of a peak transfer rate of 132 Mbytes/sec when operating at 33 MHz.

Image authentication

Matrox Morphis Dual Standard and PC/104-Plus support optional image authentication. Note that this feature is only available as an option on the versions of the boards that have both the acquisition section and the JPEG2000 accelerator.

Image authentication is a security measure that allows you to know whether someone has tampered with an image. Image authentication is achieved by creating a checksum based on all the data that is in an image. The checksum is a unique number which cannot feasibly be reproduced if any changes are made to the image; even if one pixel is altered in the image, a completely different checksum is produced. Typically, an image is grabbed and compressed before the checksum is calculated, but the checksum can be calculated on an uncompressed image as well. To protect the original checksum, the number is encrypted using a private key from an RSA key pair.

The combination of an image and its encrypted checksum is known as a signed stream. If you need to verify that an image is authentic, you can run the image through the checksum calculator and compare the result with the decrypted checksum. To decrypt the checksum, you can use the public key from the original RSA key pair. If the checksums match, then the image is authentic.

Implementation

The Matrox Morphis board accelerates two main steps in the image authentication process: checksum calculation and checksum encryption.

Checksum calculation

Matrox Morphis calculates the checksum using the Secure Hash Algorithm (SHA-256), specified in the Secure Hash Standard of the U.S. Department of Commerce¹. This algorithm provides a checksum with a level of security sufficient to protect against today's computationally feasible attacks.

1. National Institute of Standards and Technology, US Department of Commerce. FIPS 180-2, Secure Hash Standard, August 2002.

Checksum encryption

Matrox Morphis encrypts the checksum using the verification primitive of the RSA Cryptography Standard¹. To provide a high level of security, this algorithm uses a 1024-bit key from an RSA key pair.

The RSA key pair must be obtained from a cryptographically secure random number generator. The private key of this pair will then be sent to the Matrox Morphis board to begin the encryption process. It is important to know that revealing the private key compromises the integrity of all images that have been signed with this key pair. It is advised that you consult the RSA recommendations regarding secure key generation.

1. RSA Laboratories, PKCS #1 v2.1: RSA Cryptography Standard, June 2002.

Appendix A:

Glossary

This appendix defines some of the specialized terms used in this Matrox Morphis document.

Glossary

- **Band**

One of the surfaces of a buffer. A grayscale image requires just one band. A color image requires three bands, one for each color component.

- **Bandwidth**

A term describing the capacity to transfer data. Greater bandwidth is needed to sustain a higher transfer rate. Greater bandwidth can be achieved, for example, by using a wider bus.

- **Bus**

A pathway along which signals are sent, generally in two directions, for communication of data.

- **Color component**

One of the components that make up a color space. Typically, each component of a color image is stored in a separate band of a multi-band buffer.

- **Color space**

A color space is a way of representing and describing the complete range of perceived colors. A number of color spaces have been developed. Common color spaces are RGB and HSL. Both describe the same range of perceivable colors.

- **DCF**

Digitizer Configuration Format. A DCF defines the input data format and among other things, how to accept or generate video timing signals such as horizontal sync, vertical sync, and pixel clock.

- **Field**

One of the two halves that make up an image. One half consists of the image's odd lines (known as the *odd field*); the other half consists of the image's even lines (known as the *even field*).

- **Frame**

A single image grabbed from a video camera.

- **Grab**

To acquire or capture an image from a camera.

- **Horizontal synchronization signal**

The part of a video signal that indicates the end of a line and the start of a new one.

See also *vertical synchronization signal*.

- **Host**

In general, Host refers to the principal CPU in one's computer.

- **Interlaced scanning**

Describes a transfer of data in which the odd-numbered lines of the source are written to the destination buffer first and then the even-numbered lines (or vice-versa).

See also *progressive scanning*.

- **PCI**

Peripheral Component Interconnect. Present day standard expansion bus.

- **Progressive scanning**

Describes a transfer of data in which the lines of the source input device are written sequentially into the destination buffer.

Also known as *non-interlaced*. See also *interlaced scanning*.

- **RGB**

A color space that represents color using the primary colors (red, green and blue) as components.

- **Vertical synchronization signal**

The part of a video signal that indicates the end of a frame and the start of a new one.

See also *horizontal synchronization signal*.

Appendix B: Technical information

This appendix contains information that might be useful when installing your Matrox Morphis boards.

Technical information

This appendix contains information that might be useful when installing your Matrox Morphis board.

Global information

- Operating system: See your software manual for supported versions of Microsoft Windows.
- System requirements: A computer with a PCI bus and an Intel Pentium processor (or equivalent) or better.

Some older computers use a core logic chipset (interfaces PCI with Host memory) that has limited throughput capabilities. Matrox Morphis might not be able to attain full functionality on such a computer. We recommend a computer with a relatively up-to-date PCI/PCI-X chipset, such as the Intel E7500 series. An up-to-date chipset is recommended because it generally offers better performance in terms of data transfer rates. To learn more about the most appropriate chipset, refer to the Matrox Imaging website or consult with your local Matrox Imaging representative, local Matrox Imaging sales office, or the Matrox Imaging Customer Support Group at headquarters.

Acquisition features

- Accepts composite (CVBS) and component S-video (Y/C) in NTSC/PAL formats, and monochrome video in RS-170/CCIR format.
- Captured data can be converted into the following formats with square pixels: RGB planar, BGR32 packed, YUV16 packed (stored in YUYV format), and 8-bit monochrome.
- Performs fast switching between multiple video sources. In addition, it can either:
 - Perform ultra-fast switching between multiple video sources.
 - Simultaneously capture images from two or four independent video sources, depending on the board type.

- Supports connection to the following number of video sources:
 - With the Matrox Morphis Dual Standard or Quad base board, up to 4 CVBS/monochrome or 2 Y/C video sources, or a combination of both. With the Matrox Morphis Dual HDC or Dual PC/104-Plus base board, up to 16 CVBS/monochrome or 8 Y/C video sources, or a combination of both.
 - With each Matrox Morphis Video Input module, used with Matrox Morphis Dual Standard and Quad, an additional 4 CVBS/monochrome or 2 Y/C video sources, or a combination of both. You can connect up to 3 Matrox Morphis Video Input modules to the Dual Standard and Quad boards.
 - With the Matrox Morphis Video and I/O module, used with Matrox Morphis Dual Standard, HDC, and Quad, an additional 12 CVBS/monochrome or 6 Y/C video sources, or a combination of both. You can only connect a single Matrox Morphis Video and I/O module to the base board.
- ❖ Note that the Matrox Morphis Video and I/O module and the Matrox Morphis Video Input module are mutually exclusive.
- With the exception of Matrox Morphis Quad, Matrox Morphis accepts two external trigger inputs that can operate in next valid frame/field mode. From the BNC connectors of the base board, the triggers are received directly in TTL format; whereas from the Matrox Morphis Video and I/O module, the triggers are opto-isolated.
- Controllable automatic gain control (freeze with manual adjust).
- Supports cropping (ROI capture), arbitrary downscaling to 1/16th of a field or frame, and vertical/horizontal flipping.

Compression/decompression features

- Available on the Matrox Morphis Dual boards.
- Performs JPEG2000 image compression/decompression in real-time for typical video rates.
- Supports lossy (9/7 wavelet) and lossless (5/3 wavelet) modes.
- Handles up to 12 bits per component.

Additional features

In addition to the video capture and compression/decompression optional functionality, Matrox Morphis incorporates a variety of features to simplify overall system integration. These features include:

Feature	Dual Standard	Dual HDC	Dual PC/104-Plus	Quad
Hardware facilities for implementing custom software-based motion detection.	●	●	●	●
Integrated Watchdog capabilities for automatically recovering from application or system failure.	●	●		●
16 TTL user I/O integrated signals to control or synchronize with other devices user inputs. These signals can be internally accessed, or accessed externally using the Matrox Morphis Video and I/O module.	●	●		●
An RS-485 serial interface, mapped as a COM port so that the interface can be accessed through the Win32 API. The serial interface can both receive and transmit signals, but in half-duplex mode. The serial interface can be connected to an RS-485 two-wire multi-drop network.	●	●		●
Video input testing. The CVBS or Y input of decoder 0 can be routed out to the Matrox Morphis Video and I/O module for test purposes.	●	●		●
Support for image authentication. Image authentication allows you to know whether or not someone has tampered with an image.	●		●	

Data transfer features

- Features a on-board 32-bit 33/66 MHz PCI bus master to reduce CPU usage.
- Allows the transfer of live video to Host memory, off-board display memory, or other PCI devices across either a PCI or PCI-X bus.
- Can generate interrupts for the start and end of a field, frame, and sequence capture.

Electrical specifications

The following tables list the electrical specifications of the different boards under different conditions.

Important

When determining the power requirements for your computer, do not forget to include the power requirements for other peripheral devices. In addition, if combining multiple boards, do not forget to add their total power requirements together.

Typical operating voltage and current for Matrox Morphis Dual Standard with two video decoders, no JPEG2000 option, and no expansion module (applies to PCB 7142-03 rev. A / VER. 301).		
Voltage	Current	Power
5 V \pm 5%	900 mA	4.5 W
3.3 V \pm 5%	n/a	
12 V \pm 10%	100 mA	1.2 W
Total		5.7 W

Typical operating voltage and current for Matrox Morphis Dual Standard with two video decoders, JPEG2000 option, and no expansion module (applies to PCB 7142-03 rev. A / VER. 301).		
Voltage	Current	Power
5 V \pm 5%	1.4 A	7 W
3.3 V \pm 5%	n/a	
12 V \pm 10%	100 mA	1.2 W
Total		8.2 W

Typical operating voltage and current for Matrox Morphis Dual Standard with no video decoders, JPEG2000 option, and no expansion module (applies to PCB 7142-03 rev. A / VER. 301).		
Voltage	Current	Power
5 V \pm 5%	700 mA	3.5 W
3.3 V \pm 5%	n/a	
12 V \pm 10%	n/a	
Total		3.5 W

76 Appendix B: Technical information

Typical operating voltage and current for Matrox Morphis Dual HDC with two video decoders, no JPEG2000 option, and no expansion module (applies to PCB 7173-01 rev. A / VER. 100).		
Voltage	Current	Power
5 V ± 5%	900 mA	4.5 W
3.3 V ± 5%	n/a	
12 V ± 10%	100 mA	1.2 W
Total		5.7 W

Typical operating voltage and current for Matrox Morphis Dual HDC with two video decoders, with JPEG2000 option, and no expansion module (applies to PCB 7173-01 rev. A / VER. 100).		
Voltage	Current	Power
5 V ± 5%	1.4 A	7 W
3.3 V ± 5%	n/a	
12 V ± 10%	100 mA	1.2 W
Total		8.2 W

Typical operating voltage and current for Matrox Morphis Quad with four video decoders, and no expansion module (applies to PCB 7198-01 rev. A / VER. 103).		
Voltage	Current	Power
5 V ± 5%	1.4 A	7 W
3.3 V ± 5%	n/a	
12 V ± 10%	270 mA	3.24 W
Total		10.24 W

Typical operating voltage and current for Matrox Morphis Dual PC/104-Plus with two video decoders and no JPEG2000 option (applies to PCB 7227-00 rev. A / VER. 000).		
Voltage	Current	Power
5 V ± 5%	150 mA	0.75
3.3 V ± 5%	650 mA	2.145
12 V ± 10%	80 mA	0.96
Total		3.855

Typical operating voltage and current for Matrox Morphis Dual PC/104-Plus with two video decoders and with JPEG2000 option (applies to PCB 7227-00 rev. A / VER. 000).

Voltage	Current	Power
5 V \pm 5%	210 mA	1.05
3.3 V \pm 5%	1.080 A	3.564
12 V \pm 10%	80 mA	0.96
Total		5.574

Typical operating voltage and current for the Matrox Morphis video and I/O expansion module (applies to PCB 7150-00 rev. A / VER. 001).

Voltage	Current	Power
5 V \pm 5%	150 mA	0.75 W
3.3 V \pm 5%	n/a	
12 V \pm 10%	100 mA	1.2 W
Total		1.95 W

Typical operating voltage and current for the Matrox Morphis video input expansion module (applies to PCB 7162-00 rev. A / VER. 000).

Voltage	Current	Power
5 V \pm 5%	50 mA	0.25 W
3.3 V \pm 5%	n/a	
12 V \pm 10%	35 mA	0.42 W
Total		0.67 W

The following table lists the electrical signal specifications of Matrox Morphis Dual Standard, Dual HDC, and Quad.

Signals	Specifications
Video input signals	Termination: 75 Ω with jumper installed, >100 K Ω without jumper.
User input signals	No termination. Input current: $\pm 1 \mu\text{A}$ max. Input voltage: <ul style="list-style-type: none"> • Low: 0 V min; 0.8 V max. • High: 2.0 V min; 5 V max.
User output signals	No termination. Maximum output current: 24 mA. Output voltage: <ul style="list-style-type: none"> • Low: 0.55 V max. • High: 2.4 V min; 5 V max.
Opto-coupled input signals	511 Ohm series termination. Input current: <ul style="list-style-type: none"> • max of low: 250 μA • min of high: 5 mA (6.3 mA min recommended) • max of high: 15 mA (10 mA max recommended) Input voltage (with 511 Ohm series resistor only): <ul style="list-style-type: none"> • low: 0.8 V max • high: 4.05 V min
Input signal in RS-485 format	No termination. Input voltage: <ul style="list-style-type: none"> • Differential range: ± 12 V. • Sensitivity: ± 200 mV • Common mode range: -7 V to 12 V.
Output signal in RS-485 format	Specified for a 27 Ω load. Output voltage: <ul style="list-style-type: none"> • Differential range: 1.5 V to 5 V. • Common mode range: -1 V to 3 V.

The following table lists the electrical signal specifications of Matrox Morphis Dual PC/104-Plus.

Signals	Specifications
Video input signals	Termination: 75 Ω with jumper installed, >100 K Ω without jumper.
User input signals	No termination. Input current: $\pm 1 \mu\text{A}$ max. Input voltage: <ul style="list-style-type: none"> • Low: 0 V min; 0.8 V max. • High: 2.0 V min; 5 V max.
Opto-coupled input signals	330 Ohm series termination. Input current: <ul style="list-style-type: none"> • max of low: 250 μA • min of high: 2 mA (5.0 mA min recommended) • max of high: 40 mA (20 mA max recommended) Input voltage (with 330 Ohm series resistor only): <ul style="list-style-type: none"> • low: 1.0 V max • high: 4.00 V min


Dimensions and environmental specifications


- Dimensions:
 - Matrox Morphis Dual Standard, Dual HDC, and Quad boards: 16.7 L x 10.7 H cm (6.6" x 4.2") from bottom edge of goldfinger to top edge of board.
 - Matrox Morphis Dual PC/104-Plus board: 9.6 L x 9.0 H cm (3.8" x 3.5") from bottom edge of goldfinger to top edge of board.
 - Matrox Morphis Video Input module: 5.6 L x 9.1 H cm (2.2" x 3.6")
 - Matrox Morphis Video and I/O module: 6.9 L x 10.7 H cm (2.7" x 4.2")
- Minimum/maximum ambient operating temperature: 0°C to 55°C.
- Minimum/maximum storage temperature: -25°C to 85°C.
- Operating humidity: 10% - 90% (non-condensing).
- Storage humidity: 10% - 90% (non-condensing).
- Maximum altitude for operation: 3000 meters.
- Maximum altitude for transport: 12000 meters.

Base board input and output connectors

Matrox Morphis Dual Standard and Quad boards


The Matrox Morphis Dual Standard and Quad boards have several interface connectors. On their brackets, they have four BNC connectors for video input. On the top edge of the boards, there are three 10-pin connectors for video input from the Matrox Morphis expansion modules, and one 30-pin connector for I/O from the Matrox Morphis Video and I/O module. In addition, there is a video output connector for test purposes and two system reset connectors. Behind each BNC connector, there is a video input termination connector, which allows you to control the video input termination. In addition, on the Matrox Morphis Dual Standard, there is a 3-pin Berg connector behind BNC 2 and BNC 3, which establishes if its respective BNC is used for video input or trigger input.

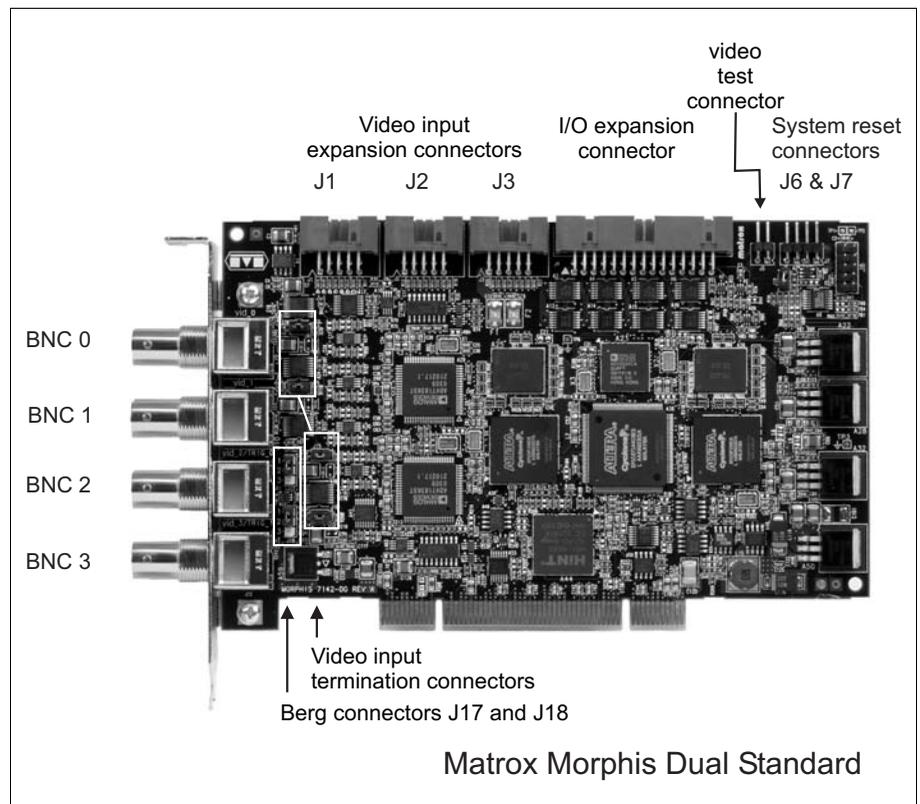

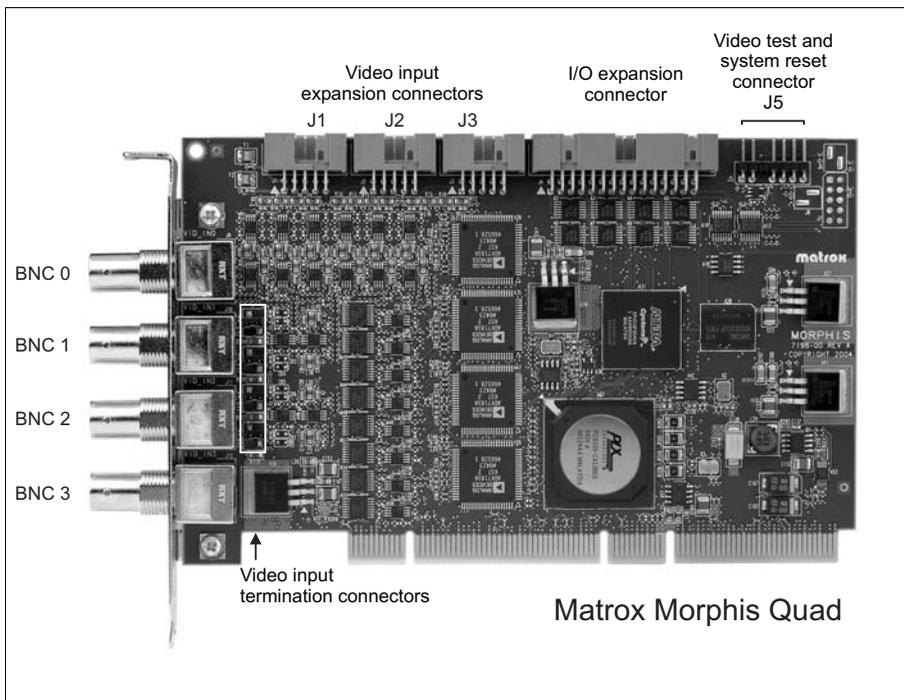

BNC connectors

The BNC connectors are standard, low profile, 75 Ohm impedance BNC connectors, used to receive CVBS and/or Y/C video input. The connectors' pin assignment is as follows:

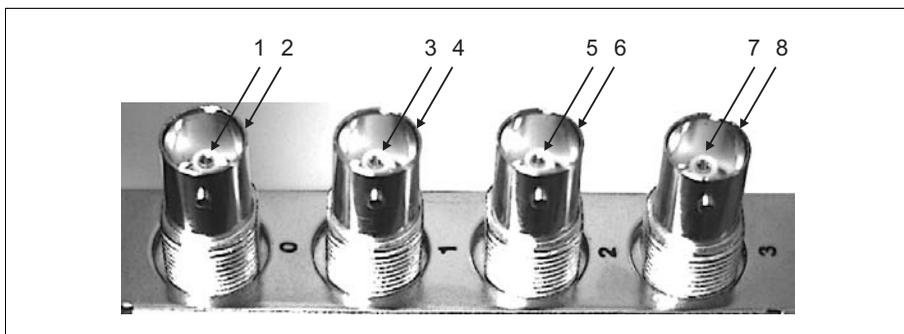


Pin	Signal	Description
1	VID_IN0	CVBS video input 0 or the Y component of Y/C video input 0.
2 (shell)	GND	Ground.
3	VID_IN1	CVBS video input 1 or the C component of Y/C video input 0.
4 (shell)	GND	Ground.
5	VID_IN2 (or P0_TTL_TRIG_IN) ¹	CVBS video input 2, the Y component of Y/C video input 1, or TTL trigger input for acquisition path 0.
6 (shell)	GND	Ground.
7	VID_IN3 (or P1_TTL_TRIG_IN) ¹	CVBS video input 3, the C component of Y/C video input 1, or TTL trigger input for acquisition path 1.
8 (shell)	GND	Ground.

1. External trigger only available on Matrox Morphis Dual Standard.

You can use a standard video cable (available from your local electronic store) to interface with this connector.

Video input expansion connectors

The video input expansion connectors are standard, 0.1" spacing, 10-pin male connectors, used to interface video input from any of the Matrox Morphis expansion modules with the base board. The connector's pin assignment is as follows:

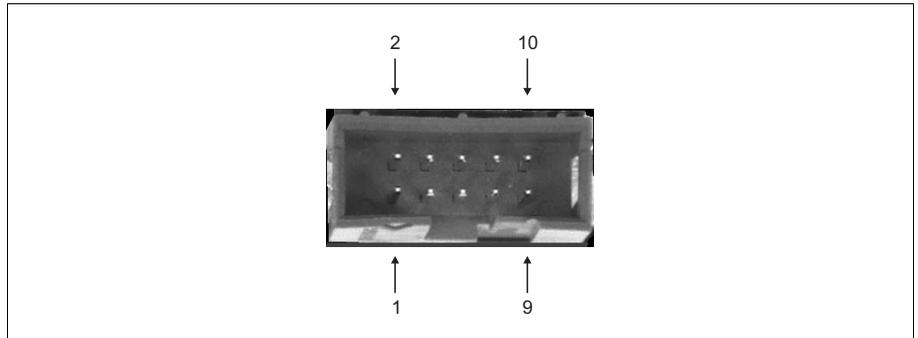

84 Appendix B: Technical information

Pin	Signals of video input expansion connectors			Description
	J1	J2	J3	
1	+12V	+12V	+12V	Fused +12 Volt supply for Matrox Morphis modules.
2	+5V	+5V	+5V	Fused +5 Volt supply for Matrox Morphis modules.
3	VID_IN4	VID_IN8	VID_IN12	CVBS video input 4, 8, or 12, respectively, or the Y component of Y/C video input 2, 4, or 6, respectively.
4	GND	GND	GND	Ground.
5	VID_IN5	VID_IN9	VID_IN13	CVBS video input 5, 9, or 13, respectively, or the C component of Y/C video input 2, 4, or 6, respectively.
6	GND	GND	GND	Ground.
7	VID_IN6	VID_IN10	VID_IN14	CVBS video input 6, 10, or 14, respectively, or the Y component of Y/C video input 3, 5, or 7, respectively.
8	GND	GND	GND	Ground.
9	VID_IN7	VID_IN11	VID_IN15	CVBS video input 7, 11, or 15, respectively, or the C component of Y/C video input 3, 5, or 7, respectively.
10	GND	GND	GND	Ground.


To interface this connector with a Matrox Morphis expansion module, the module includes a Matrox cable that has a standard 10-pin female connector at both ends.

For customers planning to build their own cable to interface with video input from another source, parts can be purchased from:

Manufacturer	3M
IDC Connector	3473-6610
Ribbon cable	3365/10

I/O expansion connector

The I/O expansion connector is a standard, 0.1" spacing, 30-pin male connector, used to transmit user-defined signals and receive trigger or user-defined signals. It is also used by the UART to send and receive control signals to and from an external device. This connector is typically interfaced with the Matrox Morphis Video and I/O module. The I/O expansion connector's pin assignment is as follows:

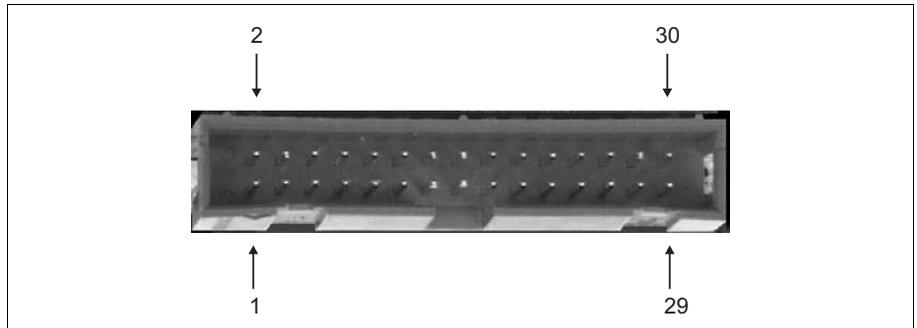

Pin	Signal	Description
1	TTL_USER_IO_0	TTL user input/output 0.
2	TTL_USER_IO_1	TTL user input/output 1.
3	TTL_USER_IO_2	TTL user input/output 2.
4	TTL_USER_IO_3	TTL user input/output 3.
5	GND	Ground.
6	GND	Ground.
7	TTL_USER_IO_5	TTL user input/output 5.
8	TTL_USER_IO_4	TTL user input/output 4.
9	TTL_USER_IO_7	TTL user input/output 7.
10	TTL_USER_IO_6	TTL user input/output 6.
11	GND	Ground.
12	GND	Ground.
13	TTL_USER_IO_8	TTL user input/output 8.
14	TTL_USER_IO_9	TTL user input/output 9.
15	TTL_USER_IO_10	TTL user input/output 10.
16	TTL_USER_IO_11	TTL user input/output 11.
17	GND	Ground.
18	GND	Ground.
19	TTL_USER_IO_13	TTL user input/output 13.

Pin	Signal	Description
20	TTL_USER_IO_12	TTL user input/output 12.
21	TTL_USER_IO_15	TTL user input/output 15.
22	TTL_USER_IO_14	TTL user input/output 14.
23	GND	Ground.
24	GND	Ground.
25	TTL_RxD	UART serial TTL input (receive data).
26	TTL_TxD	UART serial TTL output (transmit data).
27	TTL_CTS	UART CTS input (clear to send).
28	TTL_RTS	UART RTS output (ready to send).
29	P0_TTL_TRIG_IN ¹	TTL trigger input for acquisition path 0.
30	P1_TTL_TRIG_IN ¹	TTL trigger input for acquisition path 1.

1. External trigger only available on Matrox Morphis Dual Standard.

To interface this connector with the Matrox Morphis Video and I/O module, the module includes a Matrox cable that has a standard 30-pin female connector at both ends.

For customers planning to build their own cable to interface this connector with a custom board, parts can be purchased from:

Manufacturer	3M
IDC Connector	3419-6630
Ribbon cable	3365/30


Video test and system reset connectors

Matrox Morphis Dual Standard has a video test connector and two system reset connectors, while Matrox Morphis Quad has a single connector that encompasses this functionality. In both cases, the connectors are standard, right angle, 0.1" spacing, male connectors; you interface with them in the same way.

The video test pins are used to output the CVBS/monochrome video input, or the Y component of the Y/C video input that is routed to decoder 0. You can also interface with these pins through Video and I/O expansion connector 0 (DB-44) of the Matrox Morphis Video and I/O module.


The system reset pins are used to reset the motherboard if the reset button is pressed or the Watchdog circuitry of Matrox Morphis detects abnormal Host inactivity.

The video test and system reset connectors' pin assignment for Matrox Morphis Dual Standard is as follows:

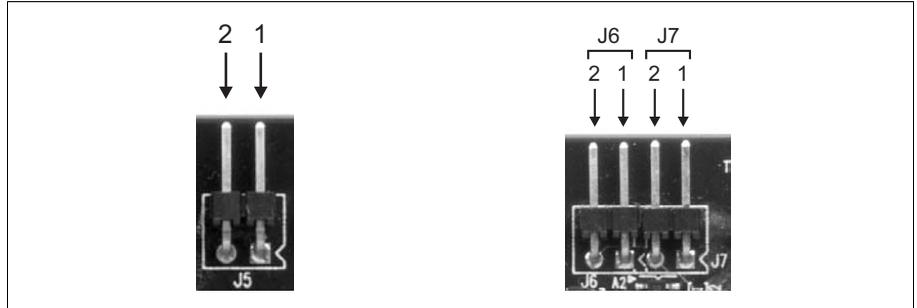

Connector	Pin	Signal	Description
J5	1	P0_VID_OUT	Video test output for acquisition path 0.
J5	2	GND	Video test ground.
J6	1	RESET_MB	Reset signal output (usually to motherboard).
J6	2	GND_MB	Motherboard active reset level (usually ground).
J7	1	RESET_BUTTON	Reset signal input (usually from Reset button).
J7	2	GND_MB	Motherboard active reset level (usually ground).

The video test and system reset connector's pin assignment for Matrox Morphis Quad is as follows:

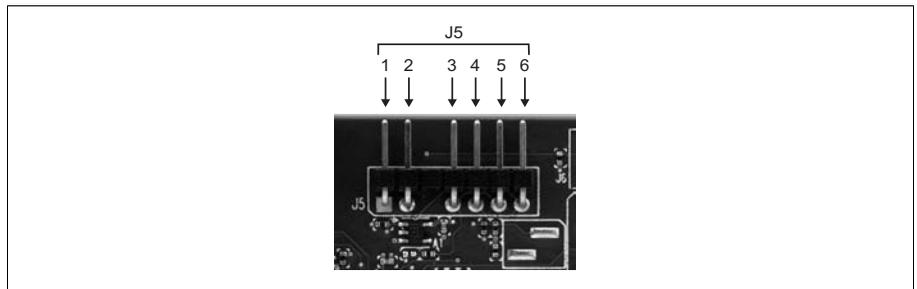

Connector	Pin	Signal	Description
J5	1	GND	Video test output for acquisition path 0.
J5	2	PO_VID_OUT	Video test ground.
J5	3	GND_MB	Motherboard active reset level (usually ground).
J5	4	RESET_MB	Reset signal output (usually to motherboard).
J5	5	GND_MB	Motherboard active reset level (usually ground).
J5	6	RESET_BUTTON	Reset signal input (usually from Reset button).

To build your own cable for the video test and system reset connectors, parts can be purchased from:

Manufacturer	FCI
Crimp-to-wire receptacle	76357-301 (discrete contact; wire size: 22-30 AWG)
Housing	65039-035 (2 positions) 65039-033 (4 positions)

**Berg connectors J17
and J18**


Trigger input through BNC 2 and BNC 3

On the Matrox Morphis Dual Standard board, BNC 2 and BNC 3 each support a TTL trigger input. The BNC connectors are set for video input data by default, but through the use of jumpers, the connectors can each be configured for trigger input.

Warning

If you connect a trigger input to the BNC connectors without appropriately installing the jumpers, you can cause damage to board because the trigger operates at +5 V and video input operates at +1 V. Follow the instructions below to correctly install the jumpers.


1. Behind the BNC connector that must be configured to accept a trigger input. locate the 3-pin Berg connector (J17 or J18):

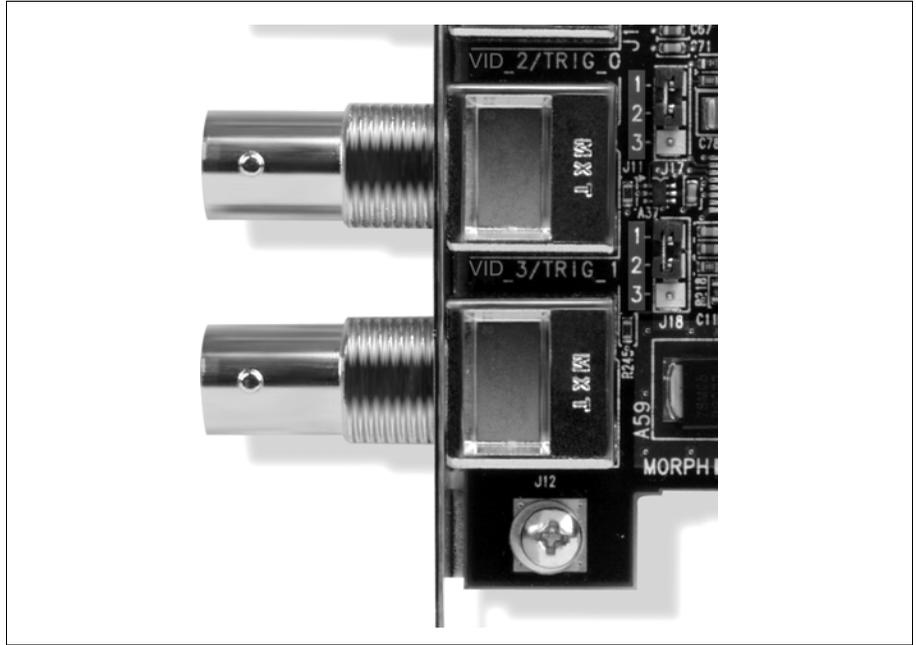

2. Remove the jumper that is positioned across pins 1-2, as shown above, and replace it over pins 2-3. The pin numbers are clearly printed on the board itself.

Video termination connectors


The video termination connectors are standard, 0.1" spacing, 2-pin male connectors that allow you to change the termination of their associated video input.

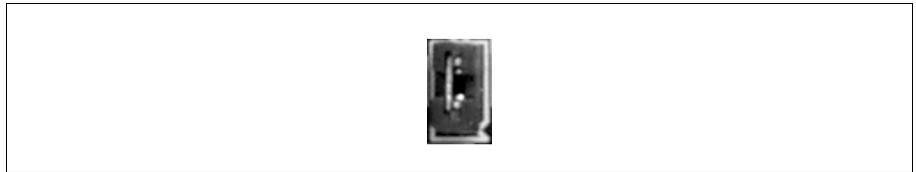

Jumper	Description
Installed	75 Ohm termination.
Not installed	High impedance (> 100 KOhms).


Matrox Morphis Dual HDC board

The Matrox Morphis Dual HDC base board has several interface connectors. On its bracket, it has a DB-44 connector for video input. On the top edge of the board, there is a 30-pin connector for I/O from the Matrox Morphis Video and I/O module and a 10-pin connector to supply power to the Matrox Morphis Video and I/O module if connected. In addition, there is a video output connector for test purposes and two system reset connectors. Adjacent to the video input connector, there is a video input termination connector for each possible video input, allowing control of its termination.

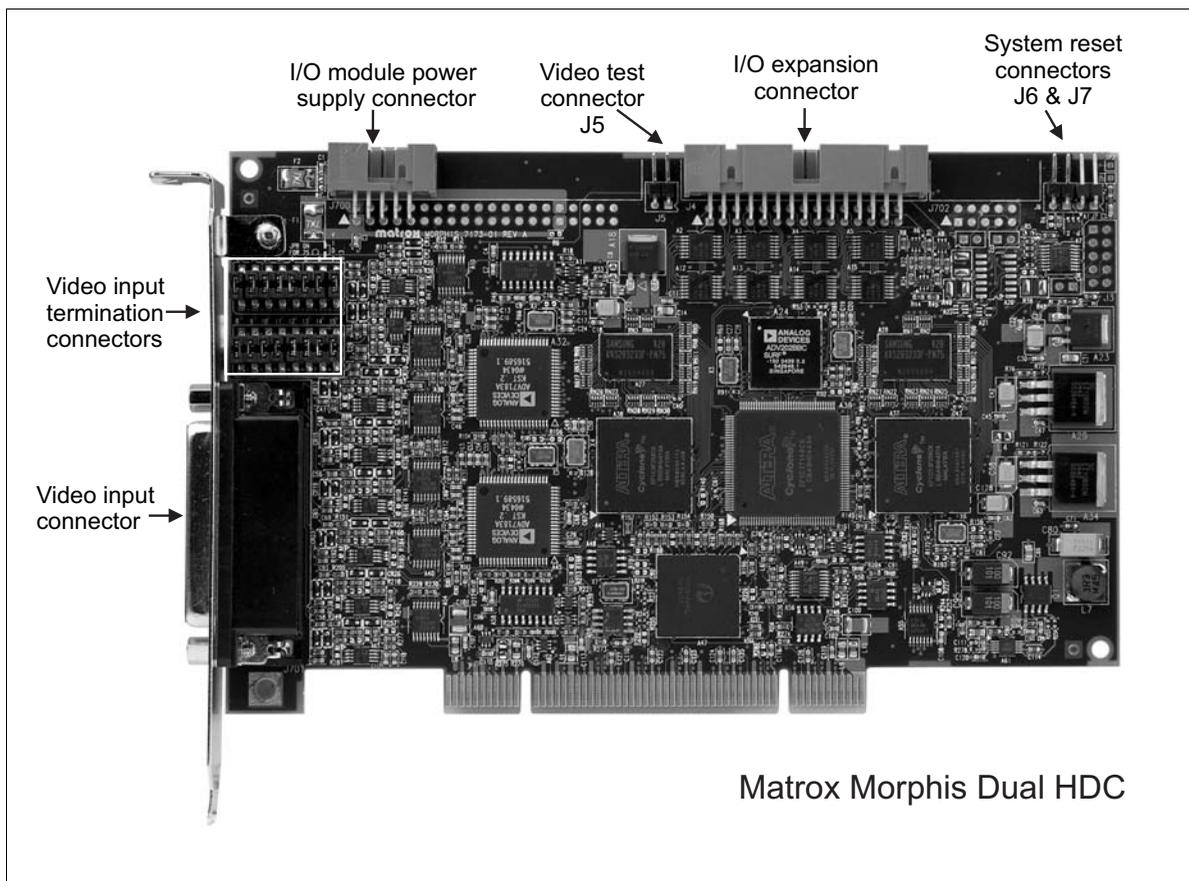

Video input connector

The video input connector is a high-density DB-44 female connector, used to receive video input signals. The connector's pin assignment is as follows.

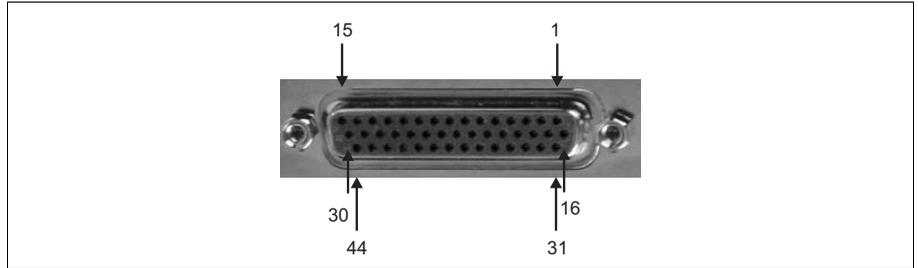

Pin	Signal	Description
1	VID_IN15	Analog video input 15 (CVBS15 or C7).
2	VID_IN7	Analog video input 7 (CVBS7 or C3).
3	GND	Ground.
4	GND	Ground.
5	GND	Ground.
6	PO_TTL_TRIG_IN	TTL trigger input for acquisition path 0.
7	VID_IN14	Analog video input 14 (CVBS14 or Y7).
8	GND	Ground.
9	VID_IN5	Analog video input 5 (CVBS5 or C2).
10	GND	Ground.
11	VID_IN13	Analog video input 13 (CVBS13 or C6).
12	NC	Not connected.
13	VID_IN4	Analog video input 4 (CVBS4 or Y2).
14	GND	Ground.
15	VID_IN12	Analog video input 12 (CVBS12 or Y6).
16	GND	Ground.
17	GND	Ground.
18	GND	Ground.
19	VID_IN0	Analog video input 0 (CVBS0 or Y0).
20	VID_IN1	Analog video input 1 (CVBS1 or C0).
21	GND	Ground.
22	GND	Ground.
23	VID_IN6	Analog video input 6 (CVBS6 or Y3).

92 Appendix B: Technical information

Pin	Signal	Description
24	P1_TTL_TRIG_IN	TTL trigger input for acquisition path 1.
25	GND	Ground.
26	GND	Ground.
27	GND	Ground.
28	NC	Not connected.
29	GND	Ground.
30	GND	Ground.
31	NC	Not connected.
32	GND	Ground.
33	VID_IN8	Analog video input 8 (CVBS8 or Y4).
34	GND	Ground.
35	VID_IN9	Analog video input 9 (CVBS9 or C4).
36	NC	Not connected.
37	NC	Not connected.
38	NC	Not connected.
39	NC	Not connected.
40	VID_IN2	Analog video input 2 (CVBS2 or Y1).
41	VID_IN3	Analog video input 3 (CVBS3 or C1).
42	GND	Ground.
43	VID_IN10	Analog video input 10 (CVBS10 or Y5).
44	VID_IN11	Analog video input 11 (CVBS11 or C5).

You can use the optional Matrox HD-44M-18BNC cable to interface with this connector. The cable has a high density D-Subminiature 44-pin male connector at one end, and 18 BNC female type connectors at the other end.


To build your own cable to interface with this connector, you can purchase the following parts:

Manufacturer:	NorComp, Inc.
Connector:	180-044-102-031
Backshell:	970-025-010-011

These parts can be purchased from third parties such as Digi-Key Corporation (www.digikey.com).

I/O expansion connector

The I/O expansion connector is a standard, 0.1" spacing, 30-pin male connector, used to transmit user-defined signals and receive trigger or user-defined signals. It is also used by the UART to send and receive control signals to and from an external device. This connector is typically interfaced with the Matrox Morphis Video and I/O module. The I/O expansion connector's pin assignment is as follows:

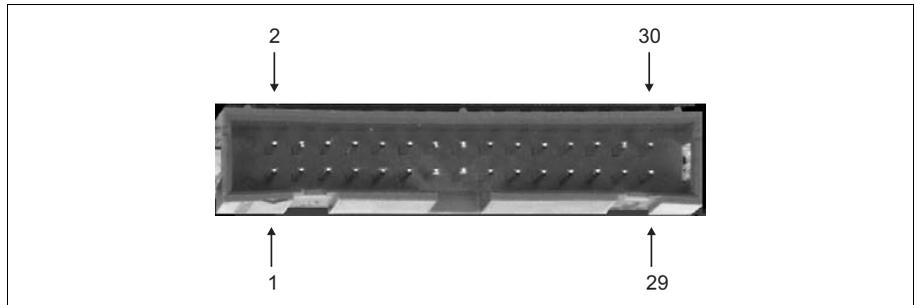

Pin	Signal	Description
1	TTL_USER_IO_0	TTL user input/output 0.
2	TTL_USER_IO_1	TTL user input/output 1.
3	TTL_USER_IO_2	TTL user input/output 2.
4	TTL_USER_IO_3	TTL user input/output 3.
5	GND	Ground.
6	GND	Ground.
7	TTL_USER_IO_5	TTL user input/output 5.
8	TTL_USER_IO_4	TTL user input/output 4.
9	TTL_USER_IO_7	TTL user input/output 7.
10	TTL_USER_IO_6	TTL user input/output 6.
11	GND	Ground.
12	GND	Ground.
13	TTL_USER_IO_8	TTL user input/output 8.
14	TTL_USER_IO_9	TTL user input/output 9.
15	TTL_USER_IO_10	TTL user input/output 10.
16	TTL_USER_IO_11	TTL user input/output 11.
17	GND	Ground.
18	GND	Ground.
19	TTL_USER_IO_13	TTL user input/output 13.

94 Appendix B: Technical information

Pin	Signal	Description
20	TTL_USER_IO_12	TTL user input/output 12.
21	TTL_USER_IO_15	TTL user input/output 15.
22	TTL_USER_IO_14	TTL user input/output 14.
23	GND	Ground.
24	GND	Ground.
25	TTL_RxD	UART serial TTL input (receive data).
26	TTL_TxD	UART serial TTL output (transmit data).
27	TTL_CTS	UART CTS input (clear to send).
28	TTL_RTS	UART RTS output (ready to send).
29	P0_TTL_TRIG_IN	TTL trigger input for acquisition path 0.
30	P1_TTL_TRIG_IN	TTL trigger input for acquisition path 1.


To interface this connector with the Matrox Morphis Video and I/O module, the module includes a Matrox cable that has a standard 30-pin female connector at both ends.

For customers planning to build their own cable to interface this connector with a custom board, parts can be purchased from:

Manufacturer	3M
IDC Connector	3419-6630
Ribbon cable	3365/30

I/O module power supply connector

The I/O module power supply connector is a standard, 0.1" spacing, 10-pin male connector, used to provide power to the Matrox Morphis Video and I/O module if connected. The connector's pin assignment is as follows:

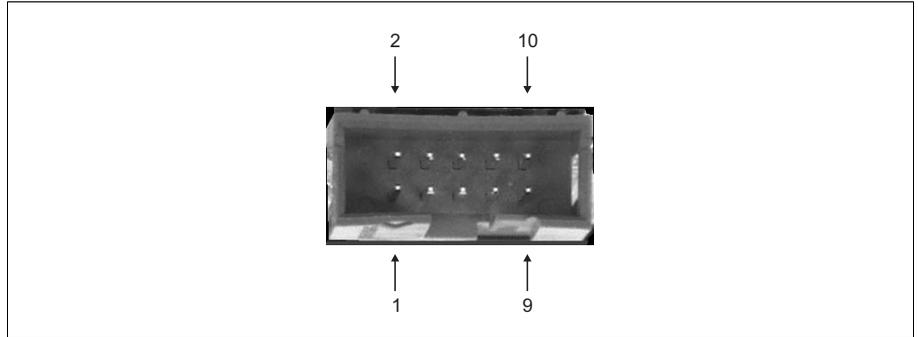

Pin	Signal	Description
1	+12V	+ 12 Volt supply for Matrox Morphis modules.
2	+5V	+ 5 Volt supply for Matrox Morphis modules.
3	reserved	Reserved.
4	GND	Ground.
5	reserved	Reserved.
6	GND	Ground.
7	reserved	Reserved.
8	GND	Ground.
9	reserved	Reserved.
10	GND	Ground.


To interface this connector with a Matrox Morphis expansion module, the module includes a Matrox cable that has a standard 10-pin female connector at both ends.

For customers planning to build their own cable to interface with video input from another source, parts can be purchased from:

Manufacturer	3M
IDC Connector	3473-6610
Ribbon cable	3365/10

Video test connector

The video test connector is a standard, right-angle, 0.1" spacing, 2-pin male connector, used to output any of the CVBS video inputs, or the Y component of any Y/C video inputs, for test purposes. You can interface this connector with the Matrox Morphis Video and I/O module and access the video signal from the Video and I/O expansion connector 0 (DB-44). The video test connector's pin assignment is as follows:

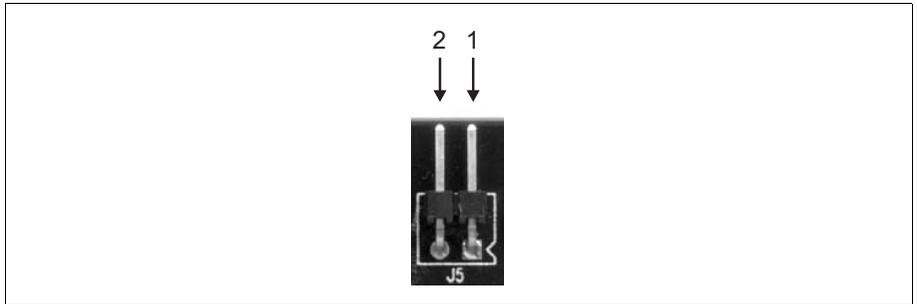


Pin	Signal	Description
1	PO_VID_OUT	Video test output for acquisition path 0.
2	GND	Video test ground.

To build your own cable, parts can be purchased from:

Manufacturer	FCI
Crimp-to-wire receptacle	76357-301 (discrete contact; wire size: 22-30 AWG)
Housing	65039-035

System reset connectors

The two system reset connectors are standard, 0.1" spacing, 2-pin male connectors, used to reset the motherboard if the reset button is pressed or the Watchdog circuitry of Matrox Morphis detects abnormal Host inactivity. The system reset connectors' pin assignment are as follows:

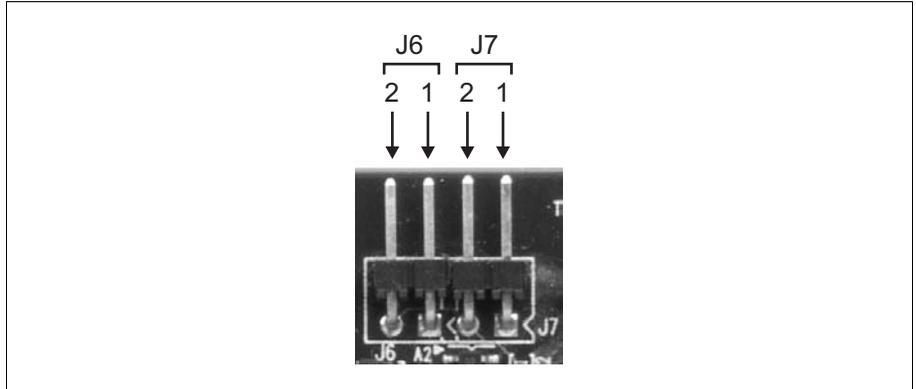


Connector	Pin	Signal	Description
J6	1	RESET_MB	Reset signal output (usually to motherboard).
J6	2	GND_MB	Motherboard active reset level (usually ground).
J7	1	RESET_BUTTON	Reset signal input (usually from Reset button).
J7	2	GND_MB	Motherboard active reset level (usually ground).

To build your own cable, parts can be purchased from:

Manufacturer	FCI
Crimp-to-wire receptacle	76357-301 (discrete contact; wire size: 22-30 AWG)
Housing	65039-035 (2 positions) 65039-033 (4 positions)

Video termination connectors


The video termination connectors are standard, 0.1" spacing, 2-pin male connectors that allow you to change the termination of their associated video input.

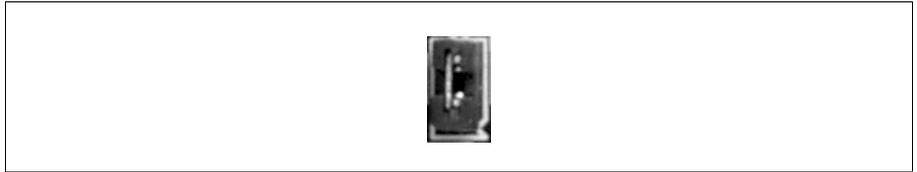

Jumper	Description
Installed	75 Ohm termination.
Not installed	High impedance (> 100 KOhms).


Matrox Morphis Dual PC/104-Plus board

The Matrox Morphis Dual PC/104-Plus board has several interface connectors. On the top side of the board, there is a 40-pin video input connector. This input can be connected to the supplied HD-44 video input module with the 40-pin flat ribbon cable. Behind the video input connector, there are sixteen video input termination connectors for each possible video input, allowing control of their termination.

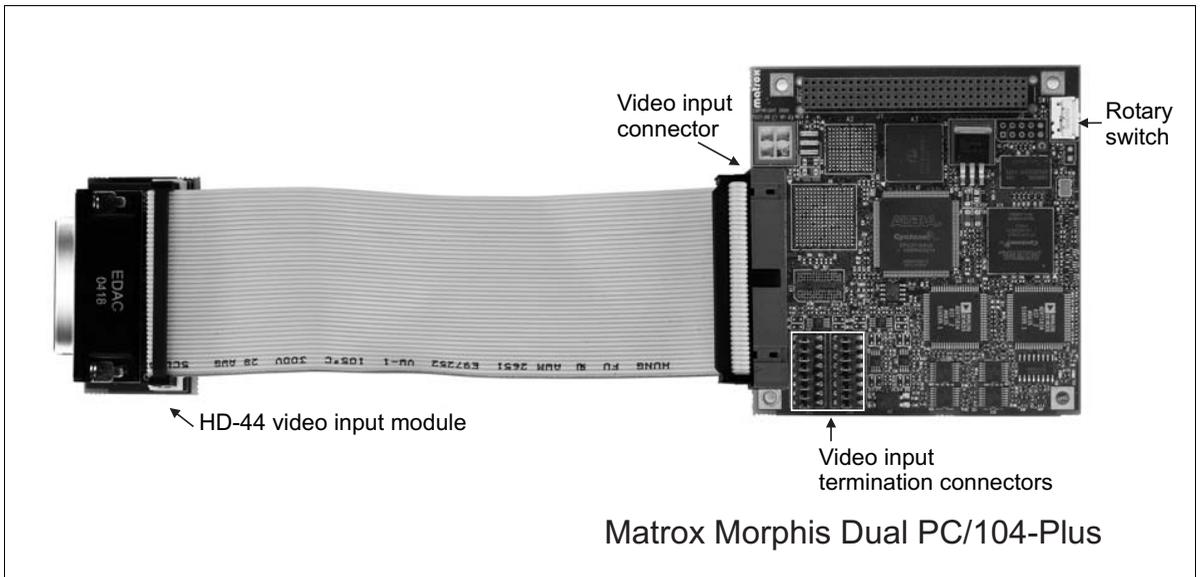

Video input connector

The video input connector is a standard, 0.1" spacing, 40-pin male connector, used to receive video input signals. The connector's pin assignment is as follows.

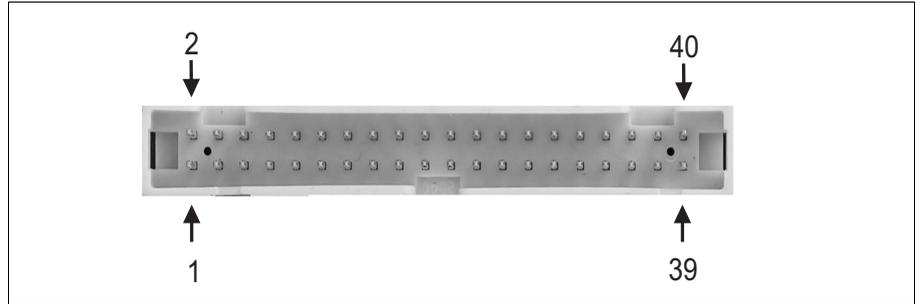


Pin	Signal	Description
1	VID_IN_0	Analog video input 0 (CVBS 0 or Y0).
2	GND	Ground.
3	VID_IN_1	Analog video input 1 (CVBS 1 or C0).
4	GND	Ground.
5	VID_IN_2	Analog video input 2 (CVBS 2 or Y1).
6	GND	Ground.
7	VID_IN_3	Analog video input 3 (CVBS 3 or C1).
8	GND	Ground.
9	P1_OPTO_TRI_IN+	Opto-isolated trigger input for acquisition path 1 (+).
10	GND	Ground.
11	VID_IN_4	Analog video input 4 (CVBS 4 or Y2).
12	GND	Ground.
13	VID_IN_5	Analog video input 5 (CVBS 5 or C2).
14	GND	Ground.
15	VID_IN_6	Analog video input 6 (CVBS 6 or Y3).
16	GND	Ground.
17	VID_IN_7	Analog video input 7 (CVBS 7 or C3).
18	GND	Ground.
19	P0_TTL_TRIG_IN	TTL trigger input for acquisition path 0.
20	GND	Ground.
21	VID_IN_8	Analog video input 8 (CVBS 8 or Y4).
22	GND	Ground.

Pin	Signal	Description
23	VID_IN_9	Analog video input 9 (CVBS 9 or C4).
24	GND	Ground.
25	VID_IN_10	Analog video input 10 (CVBS 10 or Y5).
26	GND	Ground.
27	VID_IN_11	Analog video input 11 (CVBS 11 or C5).
28	GND	Ground.
29	P1_OPTO_TRI_IN-	Opto-isolated trigger input for acquisition path 1 (-).
30	GND	Ground.
31	VID_IN_12	Analog video input 12 (CVBS 12 or Y6).
32	GND	Ground.
33	VID_IN_13	Analog video input 13 (CVBS 13 or C6).
34	GND	Ground.
35	VID_IN_14	Analog video input 14 (CVBS 14 or Y7).
36	GND	Ground.
37	VID_IN_15	Analog video input 15 (CVBS 15 or C15).
38	GND	Ground.
39	12V	+ 12 volt power, up to 750 mA.
40	GND	Ground.

Video input connector on the HD-44 video input module

The video input connector on the HD-44 video input module is a high-density 44-pin female connector, used to receive video input signals. The connector's pin assignment is as follows.

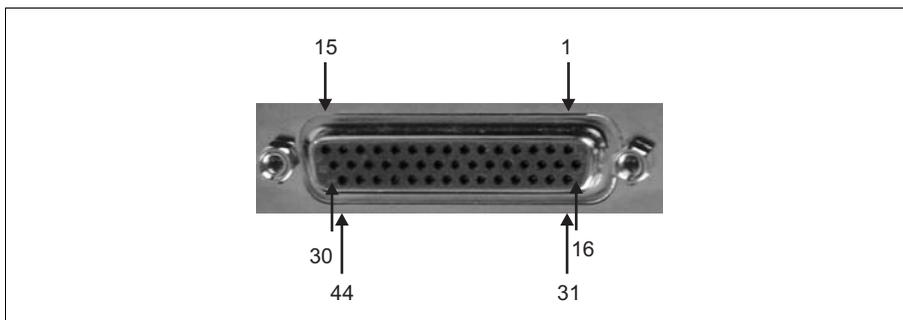

Pin	Signal	Description
1	12V	+ 12 volt power, up to 750 mA total with pin 16.
2	VID_IN11	Analog video input 11 (CVBS 11 or C5).
3	GND	Ground.
4	GND	Ground.
5	GND	Ground.
6	NC	No connect.
7	VID_IN13	Analog video input 13 (CVBS 13 or C6).
8	GND	Ground.
9	VID_IN14	Analog video input 14 (CVBS 14 or Y7).
10	GND	Ground.
11	VID_IN4	Analog video input 4 (CVBS 4 or Y2).
12	PO_TTL_TRIG_IN	TTL trigger input for acquisition path 0.
13	VID_IN2	Analog video input 2 (CVBS 2 or Y1).
14	GND	Ground.
15	VID_IN0	Analog video input 0 (CVBS 0 or Y0).
16	12V	+ 12 volt power, up to 750 mA total with pin 1.
17	GND	Ground.
18	GND	Ground.
19	VID_IN9	Analog video input 9 (CVBS 9 or C4).
20	VID_IN8	Analog video input 8 (CVBS 8 or Y4).
21	NC	No connect.
22	NC	No connect.
23	VID_IN7	Analog video input 7 (CVBS 7 or C3).
24	GND	Ground.
25	GND	Ground.
26	GND	Ground.
27	GND	Ground.
28	GND	Ground.
29	GND	Ground.
30	GND	Ground.
31	GND	Ground.
32	VID_IN15	Analog video input 15 (CVBS 15 or C15).
33	VID_IN10	Analog video input 10 (CVBS 10 or Y5).
34	GND	Ground.

102 Appendix B: Technical information

Pin	Signal	Description
35	P1_OPTO_TRIG_IN	Opto-isolated trigger input for acquisition path 1.
36	NC	No connect.
37	NC	No connect.
38	VID_IN12	Analog video input 12 (CVBS 12 or Y6).
39	NC	No connect.
40	VID_IN6	Analog video input 6 (CVBS 6 or Y3).
41	VID_IN5	Analog video input 5 (CVBS 5 or C2).
42	GND	Ground.
43	VID_IN3	Analog video input 3 (CVBS 3 or C1).
44	VID_IN1	Analog video input 1 (CVBS 1 or C0).

You can use the optional Matrox HD-44M-18BNC+ cable to interface with this connector. The cable has a high density D-Subminiature 44-pin male connector at one end, and 18 BNC female type connectors at the other end.


To build your own cable, you can purchase the following part:

Manufacturer:	NorComp, Inc.
Connector:	180-044-102-031
Backshell:	970-025-010-011

This part can be purchased from third parties such as Digi-Key corporation (www.digikey.com).

Video termination connectors

The video termination connectors are standard, 0.1" spacing, 2-pin male connectors that allow you to change the termination of their associated video input.

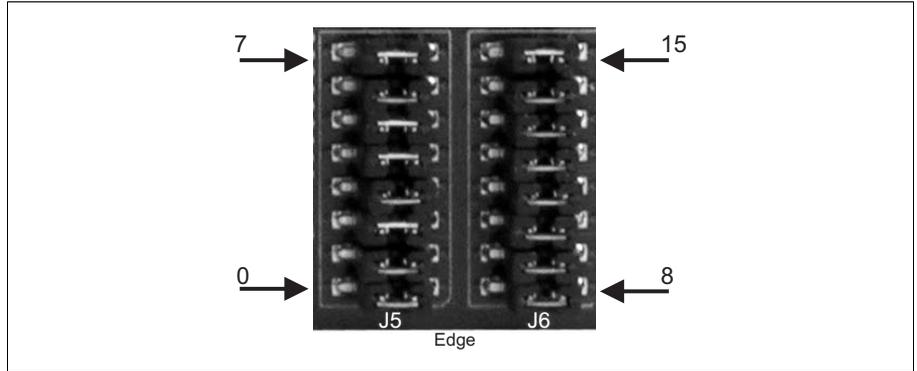


Termination	Signal	Description
0	CH_0	Termination connector for channel 0.
1	CH_1	Termination connector for channel 1.
2	CH_2	Termination connector for channel 2.
3	CH_3	Termination connector for channel 3.
4	CH_4	Termination connector for channel 4.
5	CH_5	Termination connector for channel 5.
6	CH_6	Termination connector for channel 6.
7	CH_7	Termination connector for channel 7.
8	CH_8	Termination connector for channel 8.
9	CH_9	Termination connector for channel 9.
10	CH_10	Termination connector for channel 10.
11	CH_11	Termination connector for channel 11.
12	CH_12	Termination connector for channel 12.
13	CH_13	Termination connector for channel 13.
14	CH_14	Termination connector for channel 14.
15	CH_15	Termination connector for channel 15.

Jumper	Description
Installed	75 Ohm termination.
Not installed	High impedance (> 100 KOhms).

Connectors of the expansion modules

Matrox Morphis Video Input module

The Matrox Morphis Video Input modules have four BNC connectors on their bracket to receive CVBS and/or Y/C video input; these connectors are the same as those used on the base board. The module also has an internal video expansion connector, which interfaces with a video input expansion connector on the base board. In addition, behind each BNC connector, there is a video input termination connector, which allows you to control the video input termination.

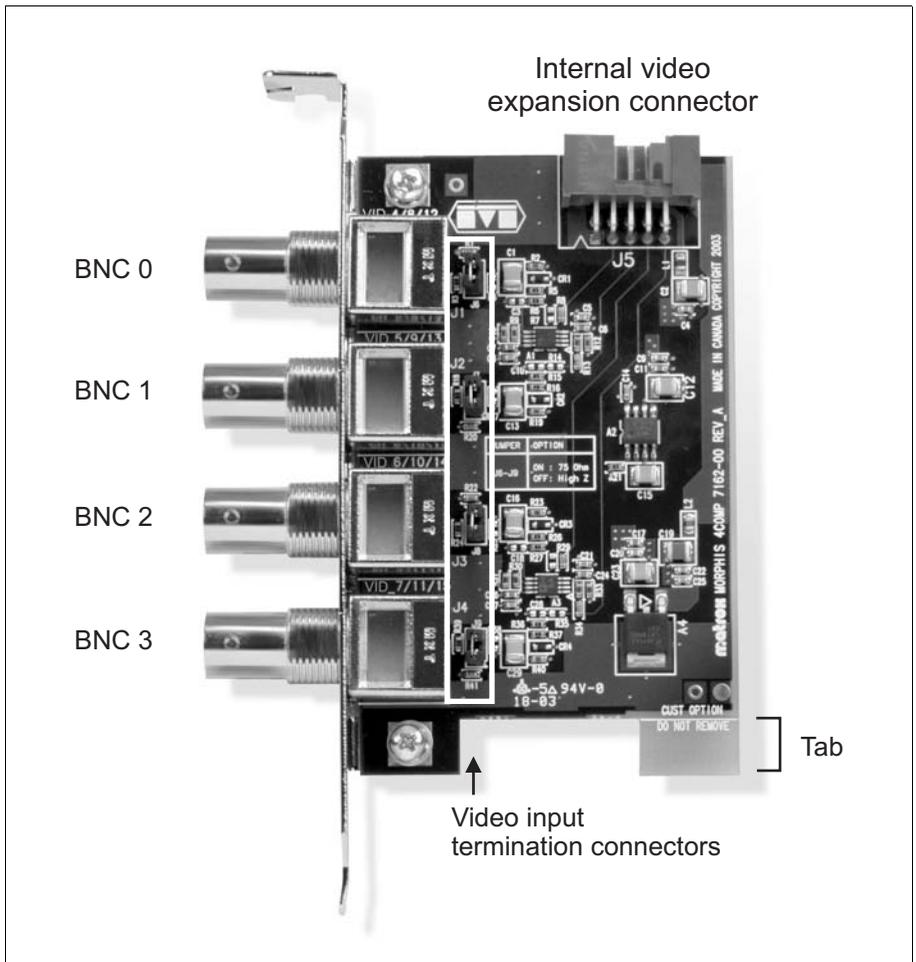

BNC connectors

The BNC connectors are the same as those on the base board. The BNC connectors are used to receive CVBS and/or Y/C video input. Their pin assignment depends on the video input expansion connector on the base board to which the module is connected. The connectors' pin assignment is as follows:

Pin	Signals of the Video Input modules			Description
	Connected to J1	Connected to J2	Connected to J3	
1	VID_IN4	VID_IN8	VID_IN12	CVBS video input 4, 8, or 12, respectively, or the Y component of Y/C video input 2, 4, or 6, respectively.
2 (shell)	GND	GND	GND	Ground.
3	VID_IN5	VID_IN9	VID_IN13	CVBS video input 5, 9, or 13, respectively, or the C component of Y/C video input 2, 4, or 6, respectively.
4 (shell)	GND	GND	GND	Ground.
5	VID_IN6	VID_IN10	VID_IN14	CVBS video input 6, 10, or 14, respectively, or the Y component of Y/C video input 3, 5, or 7, respectively.
6 (shell)	GND	GND	GND	Ground.
7	VID_IN7	VID_IN11	VID_IN15	CVBS video input 7, 11, or 15, respectively, or the C component of Y/C video input 3, 5, or 7, respectively.
8 (shell)	GND	GND	GND	Ground.

Video termination connectors


The video termination connectors are standard, 0.1" spacing, 2-pin male connectors that allow you to change the termination of their associated video input.



Jumper	Description
Installed	75 Ohm termination.
Not installed	High impedance (> 100 KOhms).

External Video and I/O connector 0

External Video and I/O connector 0 is a high-density DB-44 female connector, used to receive video input and user-defined signals, and transmit user-defined and video test output signals. The connector's pin assignment is as follows:

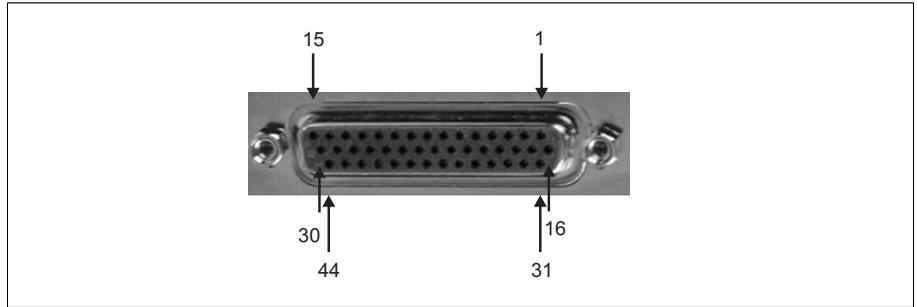

Pin	Signal	Description
1	TTL_USER_IO_15	TTL user input/output 15.
2	VID_IN15	Analog video input 15 (CVBS15 or C7).
3	GND	Ground.
4	GND	Ground.
5	GND	Ground.
6	TTL_USER_IO_9	TTL user input/output 9.
7	TTL_USER_IO_8	TTL user input/output 8.
8	TTL_USER_IO_5	TTL user input/output 5.
9	TTL_USER_IO_2	TTL user input/output 2.
10	GND	Ground.
11	VID_IN8	Analog video input 8 (CVBS8 or Y4).
12	TTL_USER_IO_0	TTL user input/output 0.
13	VID_IN6	Analog video input 6 (CVBS6 or Y3).
14	GND	Ground.
15	VID_IN4	Analog video input 4 (CVBS4 or Y2).
16	TTL_USER_IO_14	TTL user input/output 14.
17	GND	Ground.
18	GND	Ground.
19	VID_IN13	Analog video input 13 (CVBS13 or C6).
20	VID_IN12	Analog video input 12 (CVBS12 or Y6).
21	TTL_USER_IO_13	TTL user input/output 13.

Pin	Signal	Description
22	TTL_USER_IO_10	TTL user input/output 10.
23	VID_IN11	Analog video input 11 (CVBS11 or C5).
24	TTL_USER_IO_4	TTL user input/output 4.
25	GND	Ground.
26	GND	Ground.
27	GND	Ground.
28	TTL_USER_IO_1	TTL user input/output 1.
29	GND	Ground.
30	GND	Ground.
31	TTL_USER_IO_12	TTL user input/output 12.
32	TTL_USER_IO_11	TTL user input/output 11.
33	VID_IN14	Analog video input 14 (CVBS14 or Y7).
34	GND	Ground.
35	P0_VID_OUT	Video test output for acquisition path 0.
36	GND	Ground.
37	TTL_USER_IO_7	TTL user input/output 7.
38	TTL_USER_IO_6	TTL user input/output 6.
39	TTL_USER_IO_3	TTL user input/output 3.
40	VID_IN10	Analog video input 10 (CVBS10 or Y5).
41	VID_IN9	Analog video input 9 (CVBS9 or C4).
42	GND	Ground.
43	VID_IN7	Analog video input 7 (CVBS7 or C3).
44	VID_IN5	Analog video input 5 (CVBS5 or C2).

You can use the optional Matrox cable DH44-TO-13BNC/O to interface with this connector. The cable has a high density D-Subminiature 44-pin male connector at one end, and 13 BNC male type connectors and 18 open-ended wires at the other end.


To build your own cable, you can purchase the following part:

Manufacturer:	NorComp, Inc.
Connector:	180-044-102-031
Backshell:	970-025-010-011

This part can be purchased from third parties such as Digi-Key Corporation (www.digikey.com).

External I/O connector 1

External I/O connector 1 is a standard DB-9 female connector, used to receive trigger signals and connect to an RS-485 two-wire multi-drop network. The connector's pin assignment is as follows:

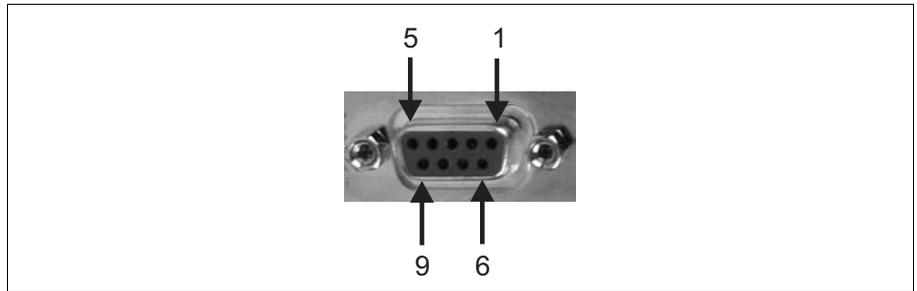

Pin	Signal	Description
1	P1_OPTO_TRIG_IN+	Opto-isolated trigger input for acquisition path 1 (positive).
2	P1_OPTO_TRIG_IN-	Opto-isolated trigger input for acquisition path 1 (negative).
3	P0_OPTO_TRIG_IN+	Opto-isolated trigger input for acquisition path 0 (positive).
4	RS485_TRxD+	RS-485 bi-directional serial port (non-inverting terminal).
5	RS485_GNDREF	RS-485 ground reference.
6	GND	Ground.
7	P0_OPTO_TRIG_IN-	Opto-isolated trigger input for acquisition path 0 (negative).
8	GND	Ground.
9	RS485_TRxD-	RS-485 bi-directional serial port (inverting terminal).


To build your own cable, you can purchase the following part:

Manufacturer:	NorComp, Inc.
Connector:	172-E09-102-031
Backshell:	970-009-010-011

This part can be purchased from third parties such as Digi-Key Corporation (www.digikey.com).

Video termination connectors

The video termination connectors are standard, 0.1" spacing, 2-pin male connectors that allow you to change the termination of their associated video input.

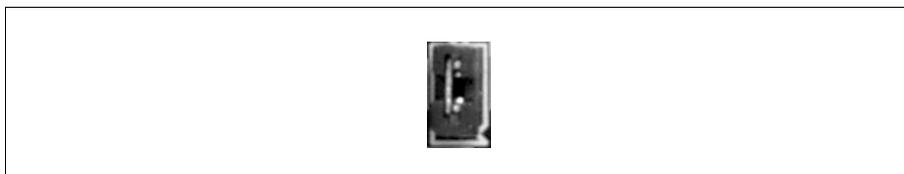

Jumper	Description
Installed	75 Ohm termination.
Not installed	High impedance (> 100 KOhms).

Appendix C:

Listing of Matrox Morphis boards

This appendix lists specific versions and revisions of the Matrox Morphis boards.

Major revisions of Matrox Morphis

Board	PCB#/ VER.	Description
Matrox Morphis Dual Standard board	7142-00 rev. A	<ul style="list-style-type: none"> • Original version.
	7142-01 rev. A	<ul style="list-style-type: none"> • Added support for Y/C video format. • Added EOC flag for JPEG2000 compression.
	7142-02 rev. A	<ul style="list-style-type: none"> • Added video signal clamping on 16 channels. • Faster JPEG2000 CODEC. • Installed low power video decoder.
	7142-0201 rev. A	<ul style="list-style-type: none"> • Fixed BNC connectors soldering issue.
	7142-03 rev. A / 301	<ul style="list-style-type: none"> • Separated JPEG2000 CODEC core voltage from global voltage supply for increased reliability. • Applied assembly optimizations.
Matrox Morphis Dual HDC board	7173-00 rev. A	<ul style="list-style-type: none"> • Original version.
	7173-00 rev. B	<ul style="list-style-type: none"> • Modified copper plane to avoid possible short-circuit between ground and analog power planes when installing PCI bracket.
	7173-01 rev. A / 100	<ul style="list-style-type: none"> • Added video signal clamping on 16 channels. • Added EOC flag for JPEG2000 compression. • Faster JPEG2000 CODEC. • Separated JPEG2000 CODEC core voltage from global voltage supply for increased reliability. • Installed low-power video decoder. • Applied assembly optimizations.
Matrox Morphis Dual PC/104-Plus board	7227-00 rev. A / 000	<ul style="list-style-type: none"> • Original version.
Matrox Morphis Quad board	7198-00 rev. A	<ul style="list-style-type: none"> • Original version.
	7198-01 rev. A / 103	<ul style="list-style-type: none"> • Increased soldering pad area on PCB for surface-mount 75-Ohm jumpers
Matrox Morphis Video and I/O module	7150-00 rev. A / 001	<ul style="list-style-type: none"> • Original version.
Matrox Morphis Video Input module	7162-00 rev. A / 000	<ul style="list-style-type: none"> • Original version.

Appendix D:

Acknowledgments

This appendix lists the copyright information regarding third-party material used to implement components on the Matrox Morphis board.

UART copyright information

The following is the copyright notice for the UART design used on the Matrox Morphis boards.

Copyright © 2002 Daniel Wallner (jesus@opencores.org)

All rights reserved.

Redistribution and use in source and synthesized forms, with or without modification, are permitted provided that the following conditions are met:

Redistributions of source code must retain the above copyright notice, this list of conditions, and the following disclaimer.

Redistributions in synthesized form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

Neither the name of the author nor the names of other contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Index

A

acquisition features, Matrox Morphis 48, 72
acquisition features, Matrox Morphis Dual 8
acquisition features, Matrox Morphis Quad 11
ActiveMIL 16

B

Berg connectors J17 and J18 88
BNC connectors 82, 105
BNC-TO-SVHS cable 19, 37–38, 42

C

cameras
 number of cameras per board 12, 46, 52
 supported *see* video formats supported
capture controllers 54
channel switching
 Matrox Morphis 12, 52
CODEC, JPEG2000 63
color-space conversion 57
COM port 14, 74
compression 14, 62
compression/decompression accelerator 62
computer requirements 17
connecting video sources 37
 Matrox Morphis Dual HDC 39
 Matrox Morphis Dual PC/104-Plus 39
 Matrox Morphis Dual Standard 37
 Matrox Morphis Quad 37
 Video and I/O module 41
 Video Input module 37
connectors
 base board connectors 81
 Berg connectors J17 and J18 88
 BNC connectors 82, 105
 Dual HDC base board connectors 90
 Dual HDC I/O expansion connector 93
 Dual HDC I/O module power supply connector 95
 Dual HDC system reset connectors 97
 Dual HDC video input connector 91
 Dual HDC video termination connectors 98
 Dual HDC video test connector 96

Dual PC/104-Plus board connectors 98
Dual PC/104-Plus video input connector 99
Dual Standard base board connectors 81
Dual Standard I/O expansion connector 85
Dual Standard system reset connectors 87
Dual Standard video input expansion connector 83
Dual Standard video termination connectors 89
Dual Standard video test connector 86
external I/O connector 1 109
External Video and I/O connector 0 42
external video and I/O connector 0 107
PC/104-Plus HD-44 video input module 100
PC/104-Plus video termination connectors 103
Quad board connectors 81
Quad I/O expansion connector 85
Quad system reset connectors 87
Quad video input expansion connector 83
Quad video termination connectors 89
Quad video test connector 86
Video and I/O module connectors 106
Video Input module connectors 104
video termination connectors 105, 110
conventions 21
cropping 13

D

data interface 63
data transfer 15, 74
DBHD44-TO-13BNC cable 19, 41
DBHD44-TO-13BNC/O cable 19, 41
decoders, video 52
decompression 14, 62
dimensions, specifications 80
documentation conventions 15

E

electrical specifications 75
environmental, specifications 80
external I/O connector 1 109
external video and I/O connector 0 107

F

flipping 13, 56
formatting features 13
four-wire multi-drop network 60

G

gain 52

H

hardware

reference 48

HD-44M-18BNC cable 20

HD-44M-18BNC+ cable 20

I

I/O controller 57

I/O expansion connector 85, 93

I/O module power supply connector 95

I/O signals 14, 74

image authentication 64

installation

hardware 24

multiple boards 44

overview 21

Video and I/O module 26, 33

Video Input module 26, 31

Watchdog cables 30

J

JPEG2000 14, 62

CODEC 63

controller 62

jumpers 88–89, 98, 103, 105, 110

M

major revisions of Matrox Morphis 112

Matrox Inspector 16

Matrox Intellicam 16

Matrox Morphis

acquisition features 48, 72

additional features 14, 74

capture controllers 54

compression/decompression accelerator 62

compression/decompression features 14, 62, 73

Dual acquisition features 8

formatting features 13

I/O controller 57

memory controller 56

Quad acquisition features 11

revisions 112

selectable inputs 12, 52

Video and I/O module 19, 26, 33

video capture controller and formatter 53

video decoders 52

Video Input module 12, 18, 26, 31, 52

Video Selector 51

video-to-PCI bridge 56

Matrox Morphis package

optional items 18

standard package 18

Matrox Morphis Video and I/O module 12, 19, 26, 33, 52

Matrox Morphis Video Input module 18

installing 26, 31

memory

acquisition 13

compression/decompression 14

controller 56

MIL 16, 18

MIL-Lite 16, 18

modules 12, 52, 57

multi-drop network, two-wire 59

multiple boards

installation 44

PCI bandwidth 46

N

network

four-wire multi-drop 60

two-wire multi-drop 59

O

optional items

BNC-TO-SVHS cable 19, 38

cables 19, 42

DBHD44-TO-13BNC cable 19, 41

DBHD44-TO-13BNC/O cable 19, 41

HD-44M-18BNC cable 20

HD-44M-18BNC+ cable 20

Matrox Morphis Video and I/O module 19

Matrox Morphis Video Input module 18

MIL 18

MIL-Lite 18

opto-isolated trigger 55

ox Meteor-II /Digital 2

P

PCI

- bandwidth 44
- interface 63
- slot 17

PCI bus interface 63

PCI-X bus interface 63

pinouts *see* connectors

pixel formatter 55

R

requirements, computer 17

revisions of Matrox Morphis 112

RS-485 compatible serial interface 58

RS-485 compatible serial interfaces 14, 74

S

sampling rate 53

scaling 13, 56

serial interface, RS-485 58

software supported 15

specifications

- dimensions 80

- electrical 75

- environmental 80

- technical 72

system reset connectors 87, 97

T

technical information 72

trigger

- opto-isolated 55

- TTL 55

two-wire multi-drop network 59

U

UART 14, 58, 74

user bits 58

user-defined signals 14, 57, 74

V

video capture controller and formatter 53

video formats supported

- CVBS 12

- monochrome 12, 72

- NTSC 12, 48, 72

- PAL 12, 48, 72

- Y/C 12, 48, 72

video input expansion connector 83

video input testing 14, 52, 74

Video Selector 51

video termination connectors 89, 98, 103, 105, 110

video test connector 86, 96

video-to-PCI bridge 56

W

Watchdog

- circuitry 60

- installing cables 30

- timer 25, 74

Regulatory compliance for Matrox Morphis Dual PC/104-Plus

FCC Compliance Statement

Warning

Changes or modifications to this unit not expressly approved by the party responsible for the compliance could void the user's authority to operate this equipment.

Note

This device complies with Part 15 of FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this device in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his/her own expense. The user is advised that any equipment changes or modifications not expressly approved by the party responsible for compliance would void the compliance to FCC regulations and therefore, the user's authority to operate the equipment.

Industry Canada Compliance Statement

This digital apparatus does not exceed the Class A limits for radio noise emission from digital apparatus set out in the Radio Interference Regulations of Industry Canada.

Le présent appareil numérique n'émet pas de bruits radioélectriques dépassant les limites applicables aux appareils numériques de Classe A prescrites dans le Règlement sur le brouillage radioélectrique édicté par Industrie Canada.

EU Notice (European Union)

WARNING: This is a class A product. In a domestic environment this product may cause radio interference in which case the user may be required to take adequate measures.

AVERTISSEMENT: Cet appareil est de la classe A. Lorsque cet appareil est utilisé dans un environnement résidentiel, il peut entraîner des interférences radioélectriques. Dans ce cas, l'utilisateur peut être prié de prendre des mesures correctives appropriées.

This device complies with EC Directive 89/336/EEC for a Class A digital device. It has been tested and found to comply with EN55022/CISPR22 and EN55024/CISPR24 when installed in a typical class A compliant host system. It is assumed that this device will also achieve compliance in any Class A compliant system.

Le présent appareil numérique répond aux exigences stipulées dans la directive européenne 89/336/EEC prescrite pour les appareils numériques de classe A. Ce produit a été testé conformément aux procédures EN55022/CISPR22 et EN55024/CISPR24 dans un système hôte typique et conforme à la classe A. On peut présumer que cet appareil sera aussi conforme s'il est utilisé dans n'importe quel système de classe A.

Regulatory compliance for Matrox Morphis Dual Standard, Dual HDC, and Quad

FCC Compliance Statement

Remark for the Matrox hardware products supported by this guide

These devices have been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment causes harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures: • Reorient or relocate the receiving antenna • Increase the separation between the equipment and receiver • Connect the equipment into an outlet on a circuit different from that to which the receiver is connected • Consult the dealer or an experienced radio/TV technician for help.

WARNING

Changes or modifications to this unit not expressly approved by the party responsible for the compliance could void the user's authority to operate this equipment. The use of shielded cables for connection of the monitor to the card is required to meet FCC requirements.

Declaration of conformity of a Class B digital device according to the FCC rules

We, the Responsible Party

Matrox International Corporation, 625 State Route 3, Unit B, Plattsburg, NY 12901-6530
Telephone: (514) 822-6000 (x2026) • Attention: Conformity Group

Declaration

The Matrox hardware products supported by this guide comply with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) these devices may not cause harmful interference, and (2) these devices must accept any interference received, including interference that may cause undesired operation. Any question regarding this declaration should be forwarded to the above coordinates.

(English) Industry Canada Compliance Statement

Remark for the Matrox hardware products supported by this guide

These digital devices do not exceed the Class B limits for radio noise emission from digital apparatus devices set out in the Radio Interference Regulation of Industry Canada.

(Français) Conformité avec les exigences du ministère de l'Industrie Canada

Remarque sur les produits matériels Matrox couverts par ce guide

Ces appareils numériques n'émettent aucun bruit radioélectrique dépassant les limites applicables aux appareils numériques de Classe B prescrites dans le Règlement sur le brouillage radioélectrique édicté par Industrie Canada.

(English) European user's information – Declaration of Conformity

Remark for the Matrox hardware products supported by this guide

These devices comply with EC Directive 89/336/EEC for a Class B digital device. They have been tested and found to comply with EN55022/CISPR22 and EN55024/CISPR24. In a domestic environment these products may cause radio interference in which case the user may be required to take adequate measures. To meet EC

requirements, shielded cables must be used to connect the monitor and other peripherals to the card. These products have been tested in a typical class B compliant host system. It is assumed that these products will also achieve compliance in any class B compliant system.

(Français) Informations aux utilisateurs Européens – Déclaration de conformité

Remarque sur les produits matériels Matrox couverts par ce guide

Ces unités sont conformes à la directive communautaire 89/336/EEC pour les unités numériques de classe B. Les tests effectués ont prouvé qu'elles sont conformes aux normes EN55022/CISPR22 et EN55024/CISPR24. Le fonctionnement de ces produits dans un environnement résidentiel peut causer des interférences radio, dans ce cas l'utilisateur peut être amené à prendre les mesures appropriées. Pour respecter les impératifs communautaires, les câbles de connexion entre le moniteur ou autres périphériques et la carte doivent être blindés. Ces produits ont été testés dans un système hôte typique compatible classe B. On suppose qu'ils présenteront la même compatibilité dans tout système compatible classe B.

(Deutsch) Information für europäische Anwender – Konformitätserklärung

Anmerkung für die Matrox Hardware-Produktunterstützung durch dieses Handbuch

Diese Geräte entsprechen EC Direktive 89/336/EEC für ein digitales Gerät Klasse B. Sie wurden getestet und entsprechen demnach EN55022/CISPR22 und EN55024/CISPR24. In einer Wohnumgebung können diese Produkte Funkinterferenzen erzeugen, und der Benutzer kann genötigt sein, entsprechende Maßnahmen zu ergreifen. Um EG-Anforderungen zu entsprechen, müssen zum Anschließen des Monitors und anderer Peripheriegeräte an die Karte abgeschirmte Kabel verwendet werden. Diese Produkt wurden in einem typischen, der Klasse B entsprechenden, Host-System getestet. Es wird davon ausgegangen, daß diese Produkte auch in jedem Klasse B entsprechenden System entsprechend funktionieren.

(Italiano) Informazioni per gli utenti europei – Dichiarazione di conformità

Nota per i prodotti hardware Matrox supportati da questa guida

Questi dispositivi sono conformi alla direttiva CEE 89/336/EEC relativamente ai dispositivi digitali di Classe B. Sono stati provati e sono risultati conformi alle norme EN55022/CISPR22 e EN55024/CISPR24. In un ambiente domestico, questi prodotti possono causare radiointerferenze, nel qual caso all'utente potrebbe venire richiesto di prendere le misure adeguate. Per soddisfare i requisiti CEE, il monitor e le altre periferiche vanno

collegati alla scheda grafica con cavi schermati. Questi prodotti sono stati provati in un tipico sistema host conforme alla classe B. Inoltre, si dà per scontato che questi prodotti acquisiranno la conformità in qualsiasi sistema conforme alla classe B.

(Español) Información para usuarios europeos – Declaración de conformidad

Observación referente a los productos de hardware de Matrox apoyados por este manual

Estos dispositivos cumplen con la directiva de la CE 89/336/EEC para dispositivos digitales de Clase B. Dichos dispositivos han sido sometidos a prueba y se ha comprobado que cumplen con las normas EN55022/CISPR22 y EN55024/CISPR24. En entornos residenciales, estos productos pueden causar interferencias en las comunicaciones por radio; en tal caso el usuario deberá adoptar las medidas adecuadas. Para satisfacer las disposiciones de la CE, deberán utilizarse cables apantallados para conectar el monitor y demás periféricos a la tarjeta. Estos productos han sido sometidos a prueba en un típico sistema anfitrión que responde a los requisitos de la clase B. Se supone que estos productos cumplirán también con las normas en cualquier sistema que responda a los requisitos de la clase B.

Product support

Limited Warranty

*Matrox warrants this product against defects in materials and workmanship for a period of **one year** from the date of delivery. Matrox and its suppliers expressly disclaim any and all other warranties, express or implied.*

Your sole remedy shall be, repair or replacement of the product provided that the defective product be returned to the authorized dealer within a year from the date of delivery.

*If you wish to return your board, contact the Matrox authorized dealer where you purchased the board for service. **Do not return a product to Matrox without authorization.***

In the event you must return the board directly to Matrox, follow these steps:

1. Contact Customer Support (The *Customer support contacts* information sheet included in your package has the phone numbers for Matrox's offices).

Customer Support will ask you to describe the problem and will issue a Return Merchandise Authorization (RMA).
2. Leave the configuration as it was when you were using the board.
3. Pack the board in its original box and return it with a completed "Product Assistance Request" form (provided in the following page).

Return address

U.S. customers must return their products to our U.S. address:

- Matrox International Corp.
625 State Route 3, Unit 1
Plattsburgh, N.Y.
12901

Canadian and other international customers can return their products directly to our Canadian facility:

- Matrox Electronic Systems Ltd.
1055 St. Regis Blvd.
Dorval, Quebec
H9P 2T4

Product Assistance Request Form

Name:	
Company:	
Address:	
Phone:	Fax:
E-mail:	
Hardware Specific Information	
Computer:	CPU:
System memory:	PCI Chipset:
System BIOS rev:	
Video card used:	Resolution:
Network Card:	Network Software:
Other cards in system:	
Software Specific Information	
Operating system:	Rev:
Matrox SW used:	Rev:
Compiler:	Rev:
Fill out only if you are returning a board	
RMA #:	
Who were you talking to in customer support?	
Date board was received:	Date of failure:
MOD #:	These numbers are on the label at the back of the board.
SER #:	
REV #:	
PMB #:	
PNS #:	
Can you reproduce the problem? Yes <input type="checkbox"/> No <input type="checkbox"/>	
Is an error code displayed? Yes <input type="checkbox"/> No <input type="checkbox"/>	If so, what code?
... Continued on reverse	

