



Bar Lighting

Main Applications ●Pitch Inspection for Connector Pin ●Crack Inspection

- Adjustable lighting angle according to the object shape
- High brightness with direct light
- Polarizer and Diffuser are also available to improve lighting.
- Aluminum PCB helps heat dissipation and ensures stability of light intensity.




Bar Lights


Series	Model No.	Color※	Dimension of Lighting Area (mm)	Power Consumption	External Dimension
UB Series	UB-34R8	Red	34×8	24V/1.0W	UB-34*8
	UB-34W8	White		24V/1.6W	
	UB-34B8	Blue		24V/1.6W	
	UB-50R15	Red	50×15	24V/1.4W	UB-50*15
	UB-50W15	White		24V/2.4W	
	UB-50B15	Blue		24V/2.4W	
	UB-75R15	Red	75×15	24V/2.4W	UB-75*15
	UB-75W15	White		24V/3.7W	
	UB-75B15	Blue		24V/3.7W	
	UB-75R30	Red	75×30	24V/4.3W	UB-75*30
	UB-75W30	White		24V/7.3W	
	UB-75B30	Blue		24V/7.3W	
	UB-100R15	Red	100×15	24V/2.9W	UB-100*15
	UB-100W15	White		24V/4.9W	
	UB-100B15	Blue		24V/4.9W	
	UB-130R15	Red	130×15	24V/3.8W	UB-130*15
	UB-130W15	White		24V/6.5W	
	UB-130B15	Blue		24V/6.5W	
	UB-150R15	Red	150×15	24V/4.3W	UB-150*15
	UB-150W15	White		24V/7.3W	
	UB-150B15	Blue		24V/7.3W	
	UB-200R15	Red	200×15	24V/5.8W	UB-200*15
	UB-200W15	White		24V/9.8W	
	UB-200B15	Blue		24V/9.8W	
	UB-200R20	Red	200×20	24V/7.7W	UB-200*20
	UB-200W20	White		24V/13.1W	
	UB-200B20	Blue		24V/13.1W	
	UB-200R30	Red	200×30	24V/11.5W	UB-200*30
	UB-200W30	White		24V/19.6W	
	UB-200B30	Blue		24V/19.6W	
UB-250R15	Red	250×15	24V/7.2W	UB-250*15	
UB-250W15	White		24V/12.2W		
UB-250B15	Blue		24V/12.2W		
UB-300R15	Red	300×15	24V/8.6W	UB-300*15	
UB-300W15	White		24V/14.7W		
UB-300B15	Blue		24V/14.7W		
UB-500R6	Red	500×6	24V/10.1W	UB-500*6	
UB-500W6	White		24V/10.1W		
UB-500B6	Blue		24V/10.1W		

Operating voltage: DC 24V


※Green ● and IR850 ● are also available. Other wavelengths such as UV365 ●, UV395 ● and IR940 ● are available upon request. Please contact us for details. Please refer to Page XX for standard items of UV365 and UV395.

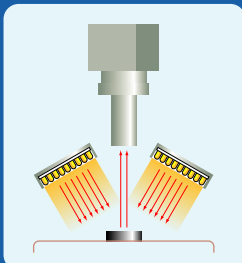


UB-50R15 Light distribution at various WD

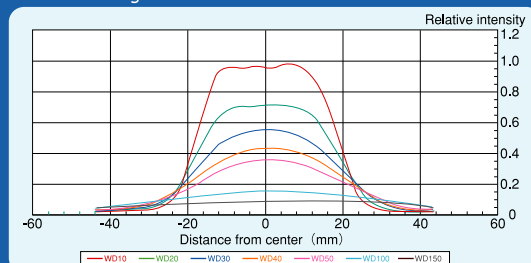


UB-50R15 Light distribution at WD 10mm

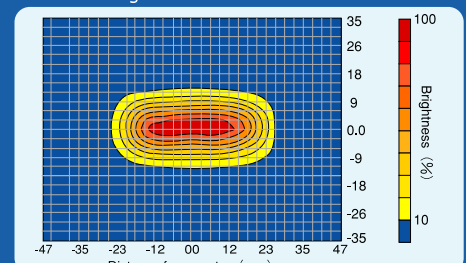


UB-34*8

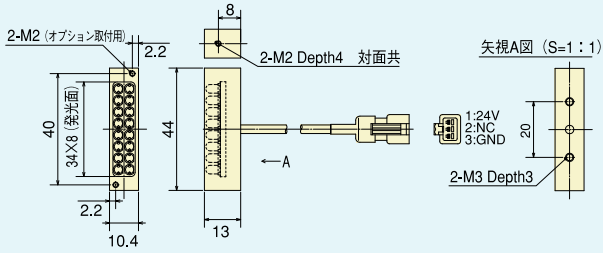


UB-50*15

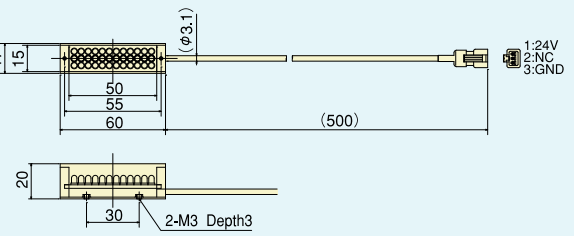


UB-75*15

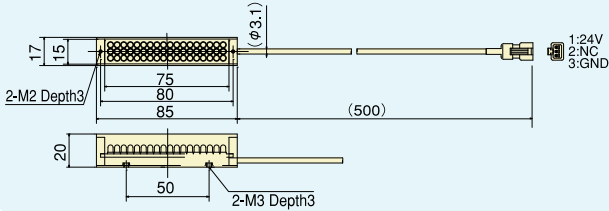


UB-75*30

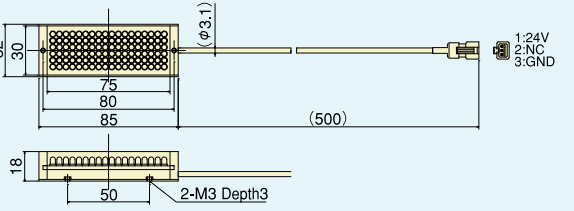


UB-100*15

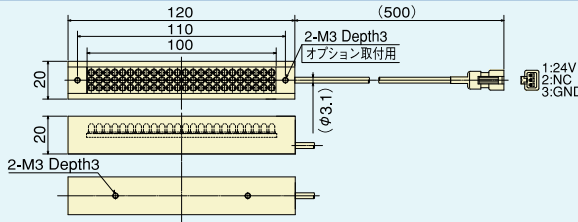


UB-130*15

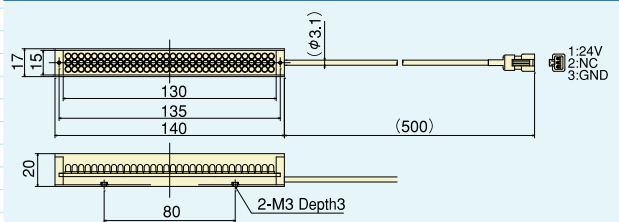


UB-150*15

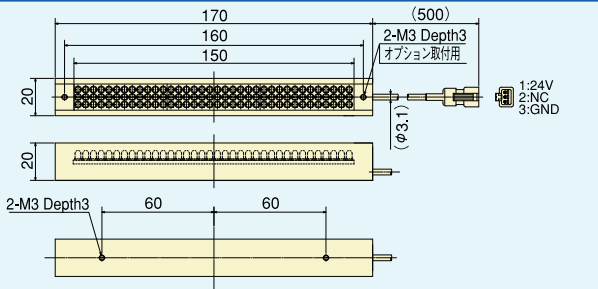


UB-200*15

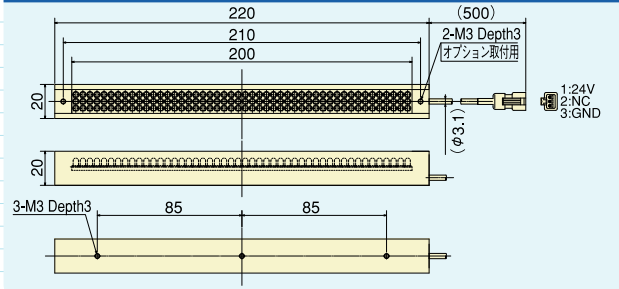


UB-200*20

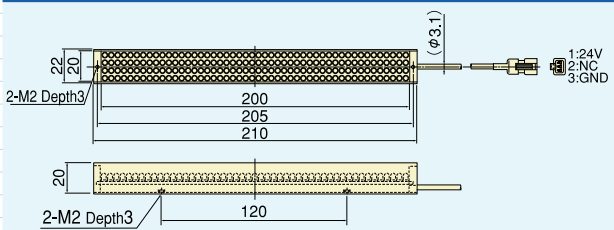


UB-200*30

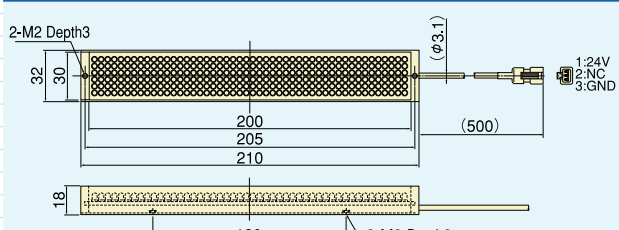


UB-250*15

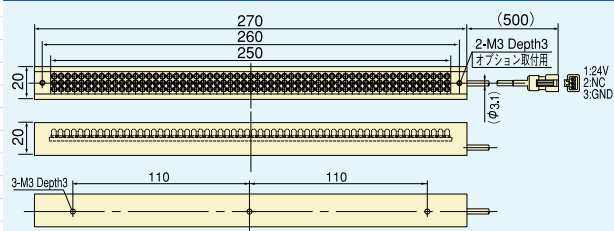

UB-300*15

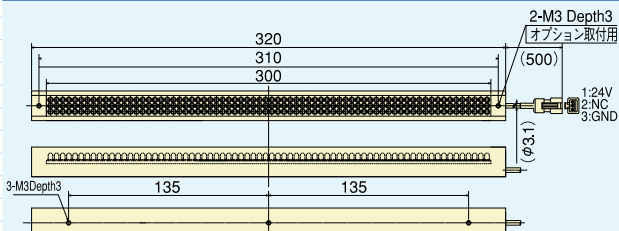

UB-500*6

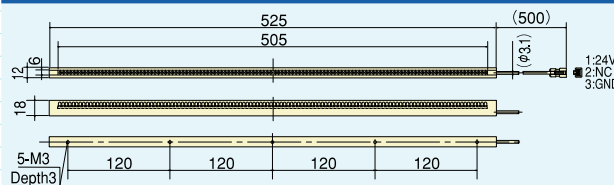

All dimensions in mm